



4X4 Matrix Specification


Item	Requirement	Remark
Frequency	698– 2700 MHz	
Insertion loss	6.1 ±1dB	
VSWR	1.20:1	
Isolation	25 dB	
3rd Order IMD 2X43dBm	- 162dBc	
Average Power, max	100 W	
Impedance	50 ohm	
Environment	IP65	
Work temp	-40-75°C	
Connector	DIN(f) , N(f), 4.3/10(f)	
Dimension	See below	

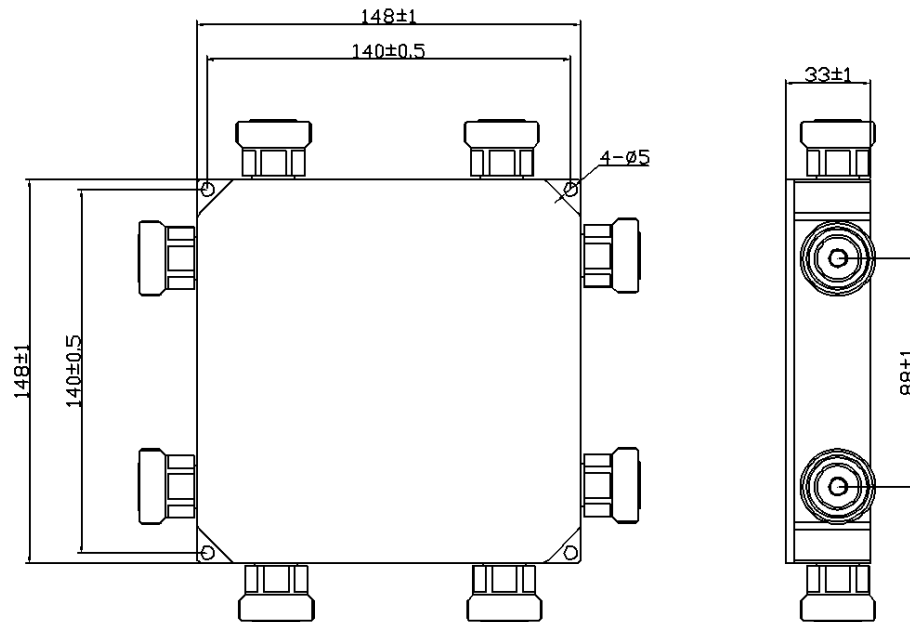

DIN Type

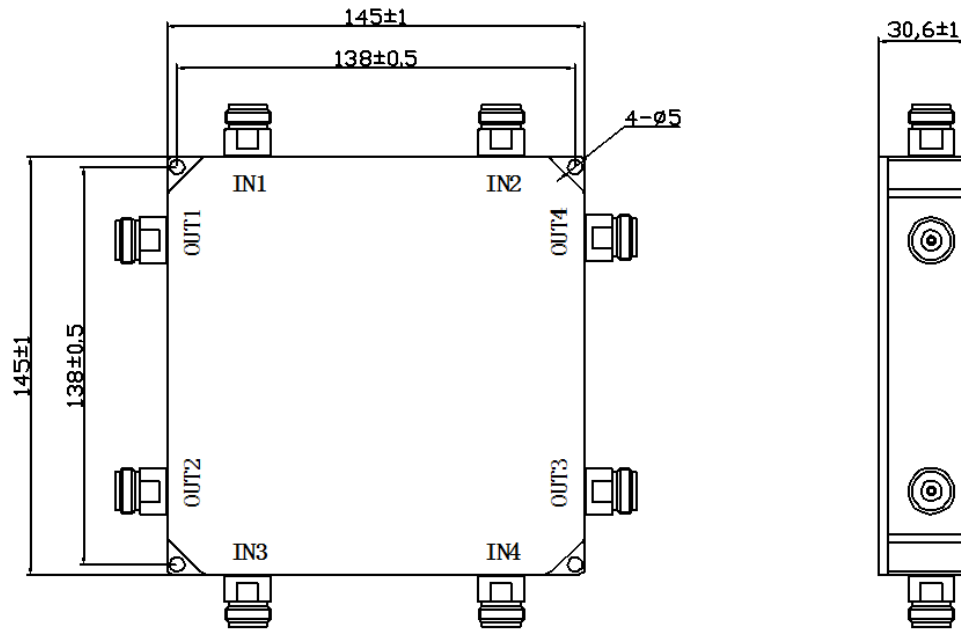

N(f) Type

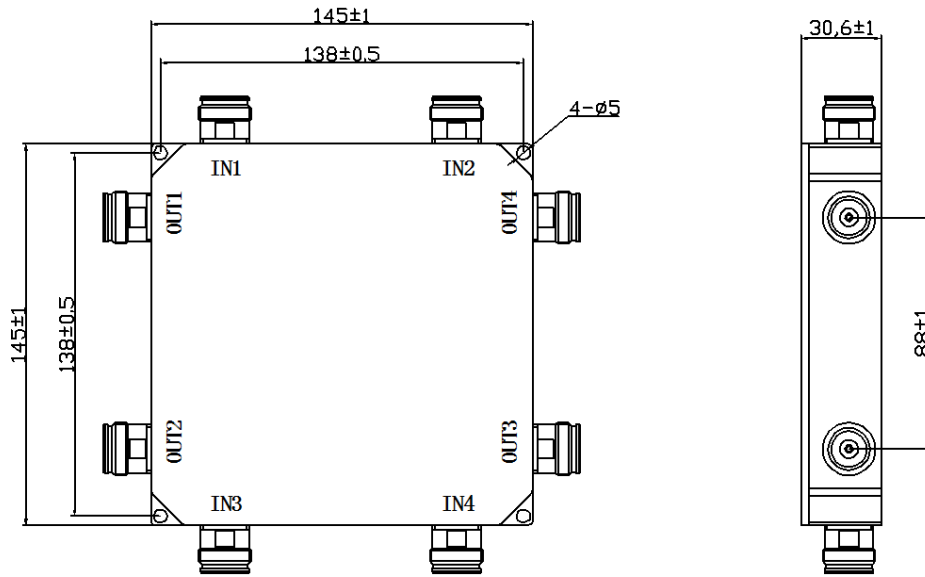

4.3/10 Type