



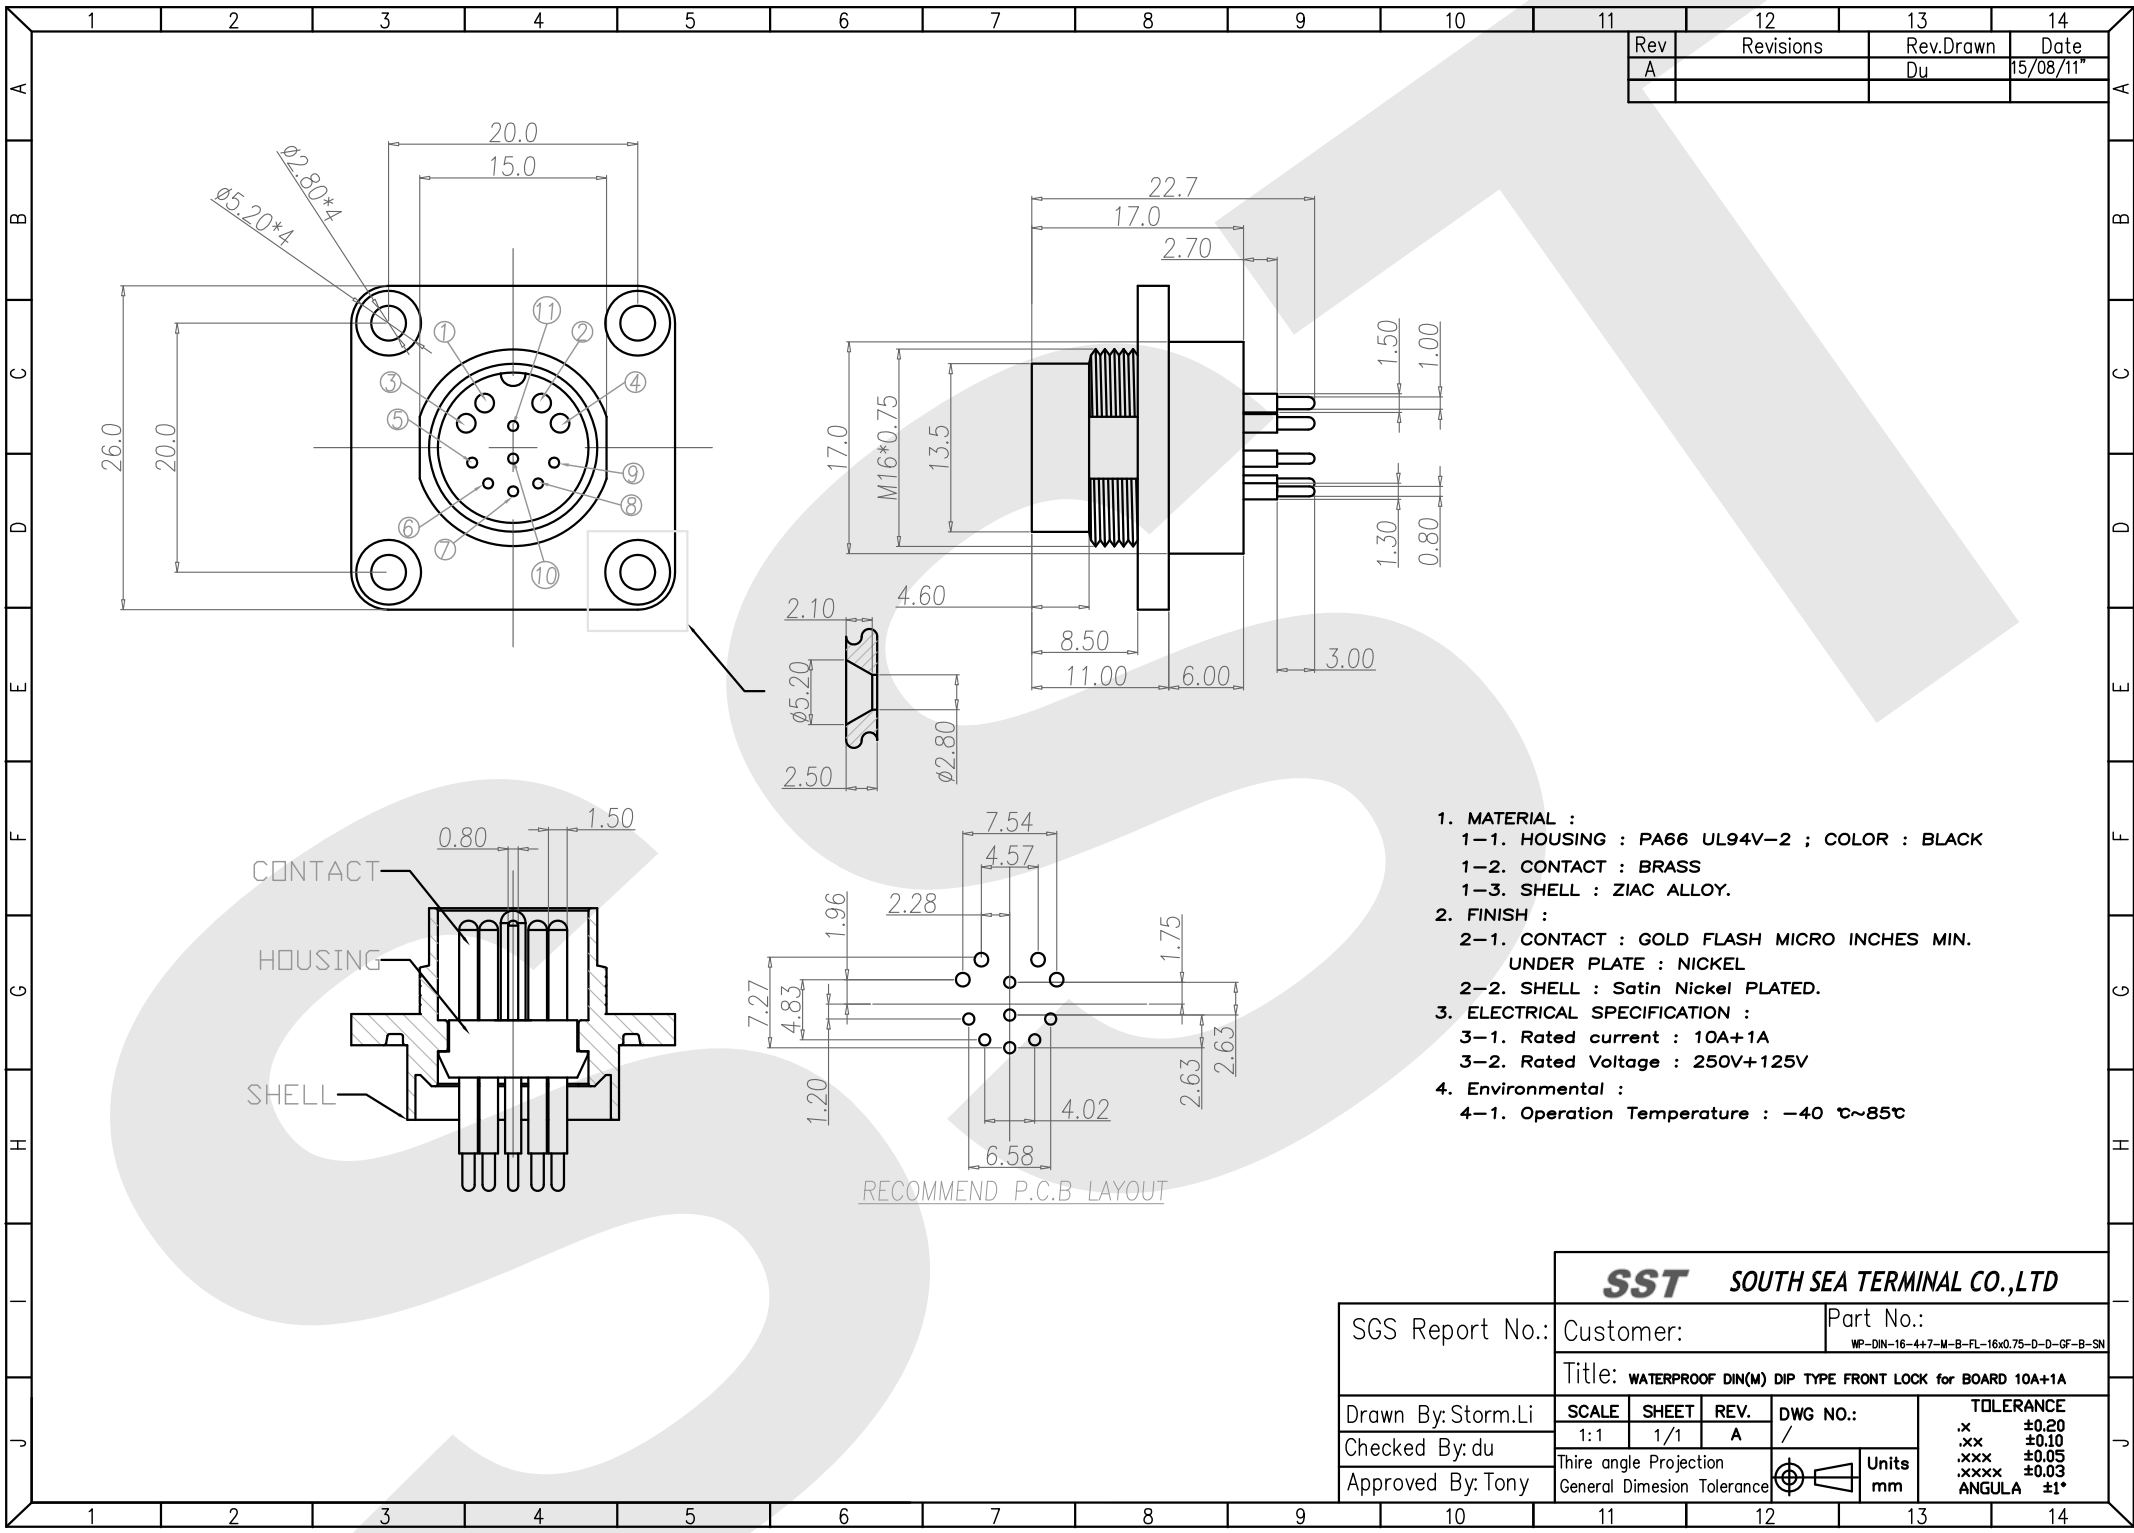

Rev	Revisions	Rev.Drawn	Date
A		Du	15/08/11*

1. MATERIAL :
1-1. HOUSING : PA66 UL94V-2 ; COLOR : BLACK
1-2. CONTACT : BRASS
1-3. SHELL : ZIAC ALLOY.
2. FINISH :
2-1. CONTACT : GOLD FLASH MICRO INCHES MIN.
UNDER PLATE : NICKEL
2-2. SHELL : Satin Nickel PLATED.
3. ELECTRICAL SPECIFICATION :
3-1. Rated current : 10A+1A
3-2. Rated Voltage : 250V+125V
4. Environmental :
4-1. Operation Temperature : -40 ℃~85℃

SST SOUTH SEA TERMINAL CO.,LTD				
Customer:			Part No.: WP-DIN-16-447-M-B-FL-16x0.75-D-D-GF-B-SN	
Title: WATERPROOF DIN(M) DIP TYPE FRONT LOCK for BOARD 10A+1A				
SCALE	SHEET	REV.	DWG NO.:	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
1:1	1/1	A	/	
Thire angle Projection				Units mm
General Dimesion Tolerance				

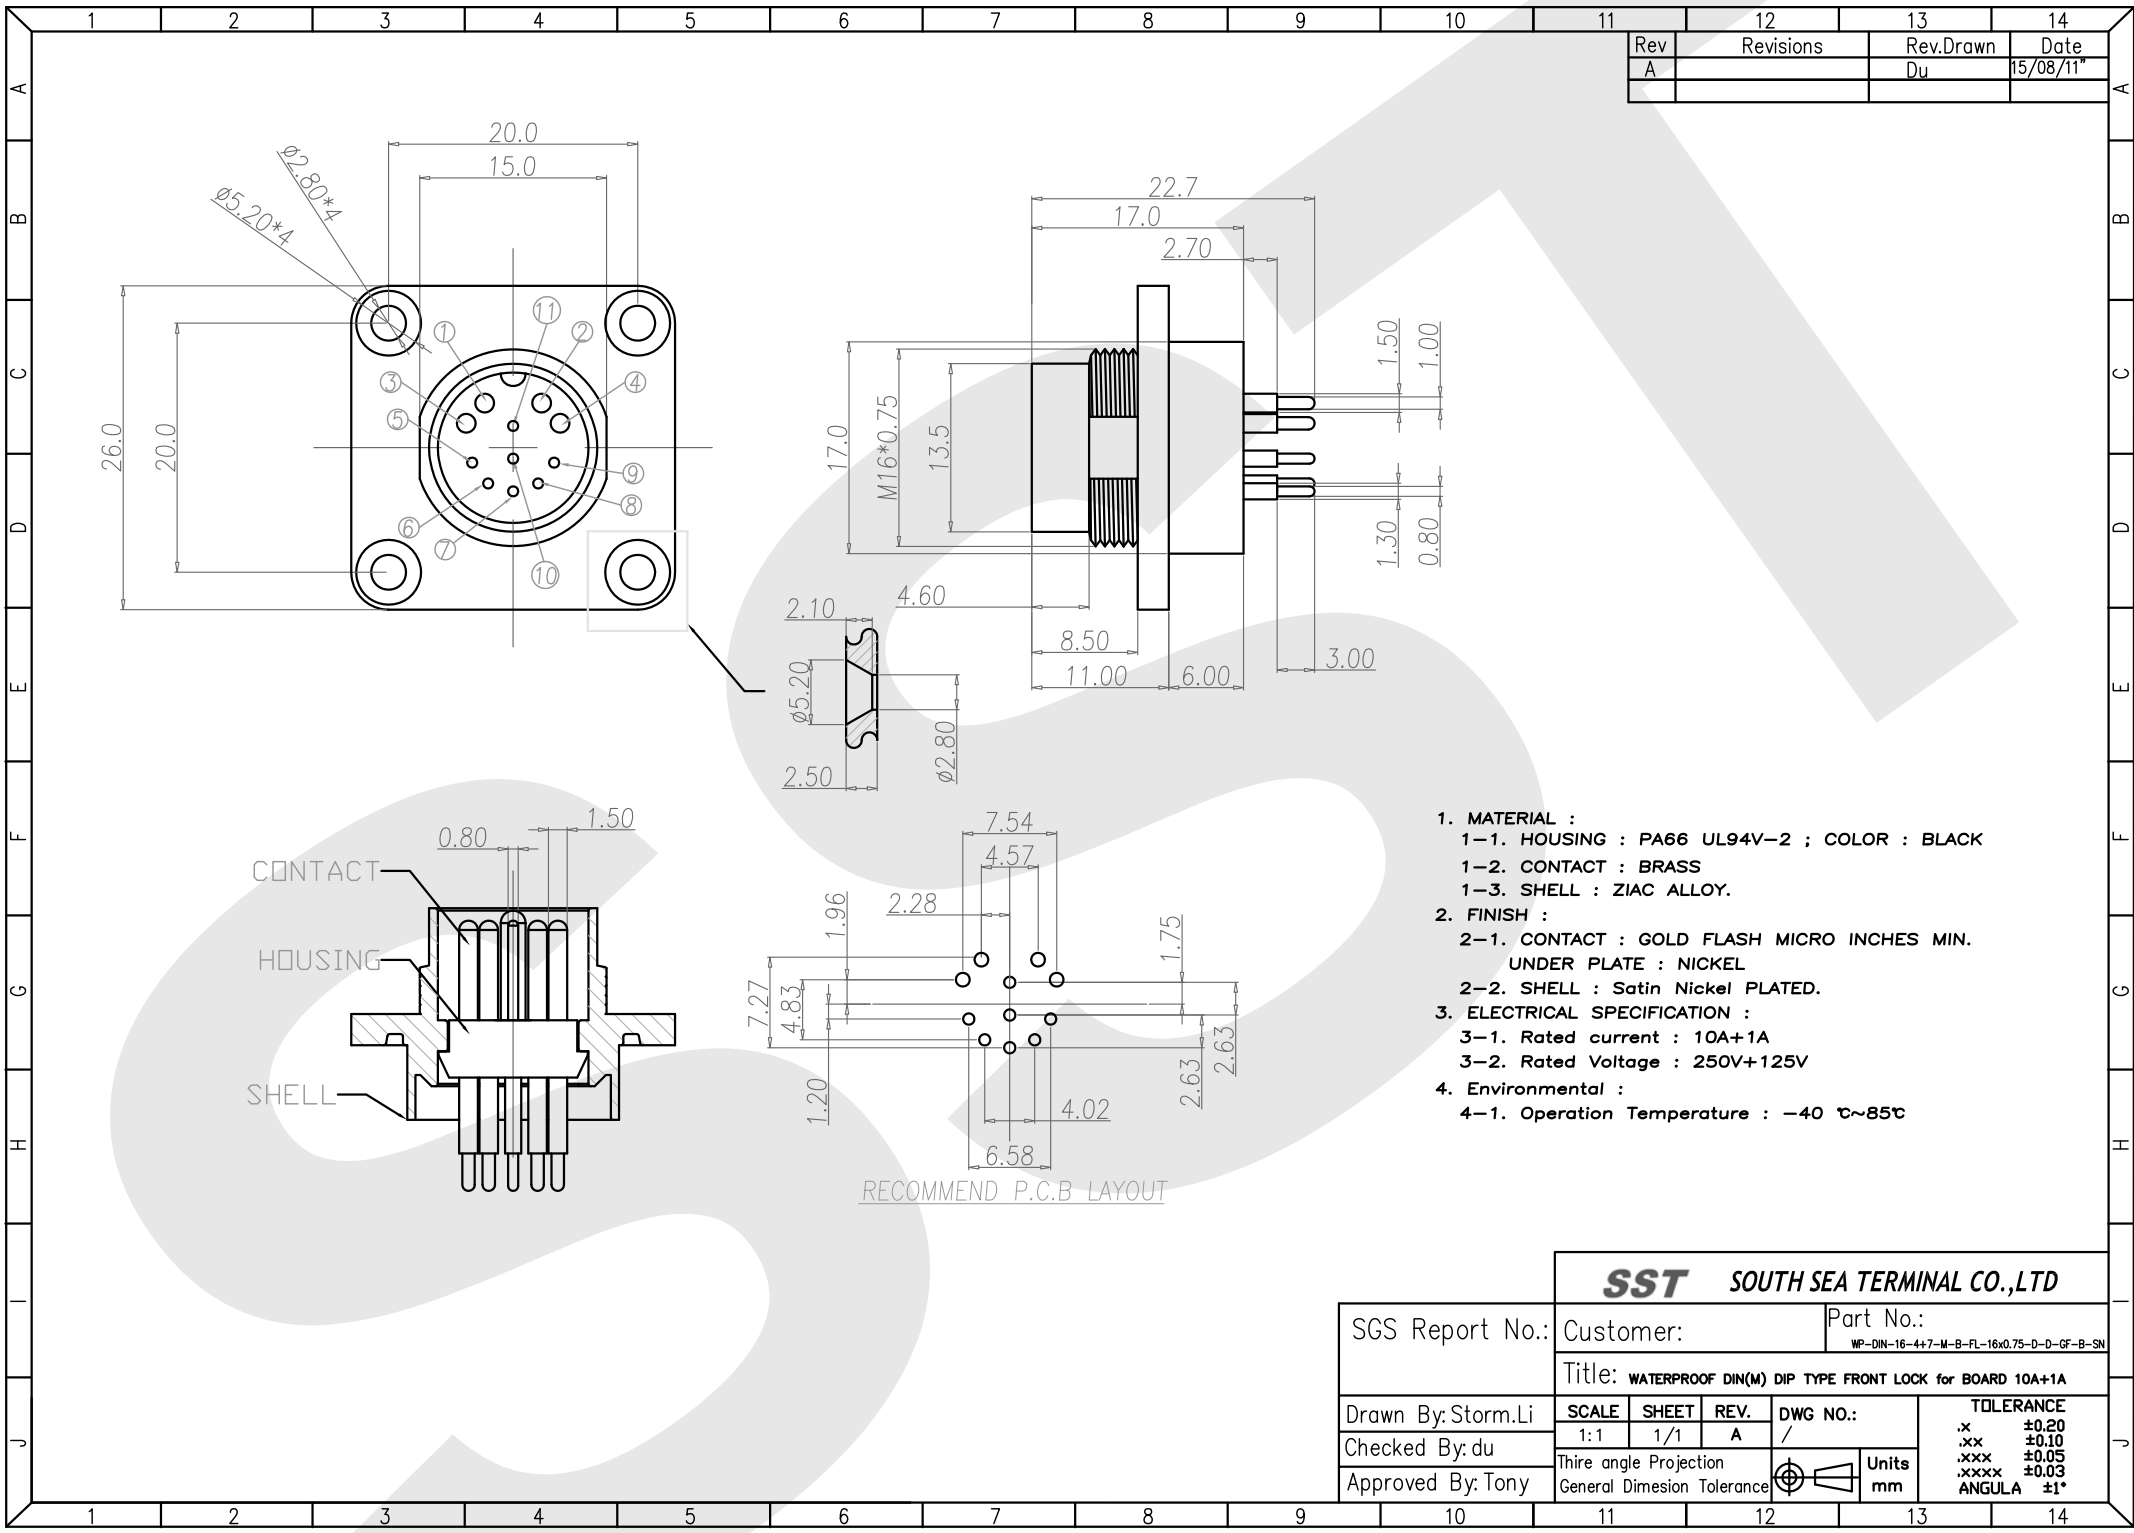






Rev	Revisions	Rev.Drawn	Date
A		Du	15/08/11*

1. MATERIAL :
1-1. HOUSING : PA66 UL94V-2 ; COLOR : BLACK
1-2. CONTACT : BRASS
1-3. SHELL : ZIAC ALLOY.
2. FINISH :
2-1. CONTACT : GOLD FLASH MICRO INCHES MIN.
UNDER PLATE : NICKEL
2-2. SHELL : Satin Nickel PLATED.
3. ELECTRICAL SPECIFICATION :
3-1. Rated current : 10A+1A
3-2. Rated Voltage : 250V+125V
4. Environmental :
4-1. Operation Temperature : -40 ℃~85℃

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:		Part No.:			
			WP-DIN-16-447-M-B-FL-16x0.75-D-D-GF-B-SN			
	Title: WATERPROOF DIN(M) DIP TYPE FRONT LOCK for BOARD 10A+1A					
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE	
Checked By:du	1:1	1/1	A	/	.x ±0.20	
Approved By: Tony	Thire angle Projection General Dimesion Tolerance				Units mm	.xx ±0.10
						.xxx ±0.05
						.xxxx ±0.03
						ANGULA ±1°

Rev	Revisions	Rev.Drawn	Date
A		Du	02/07/13

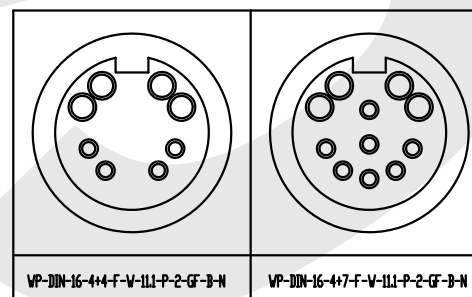
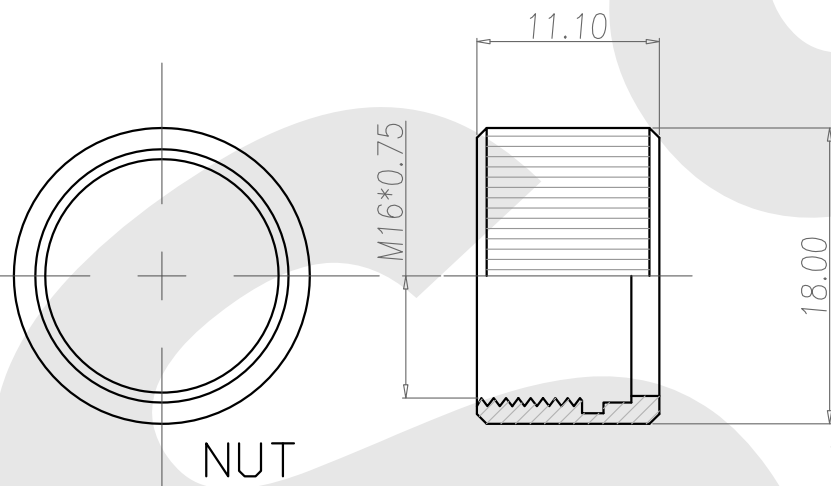
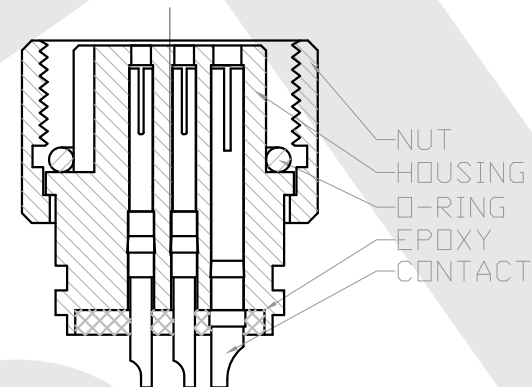
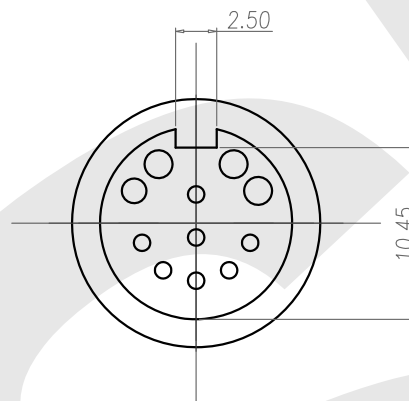
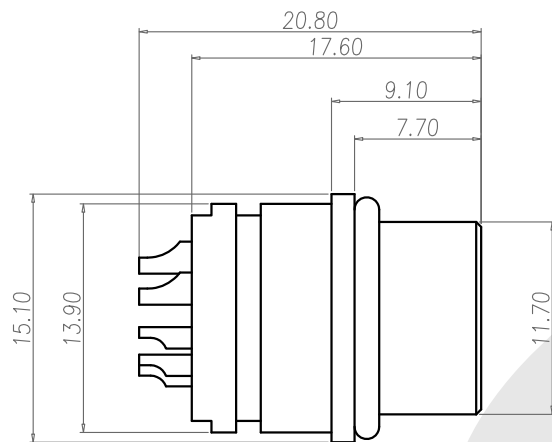


1. MATERIAL :
 - 1-1. HOUSING : PBT ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS.
 - 1-4. O-RING : EPDM ; COLOR : BLACK
2. FINISH :
 - 2-1. CONTACT : GOLD FLASH MICRO INCHES MIN. UNDER PLATE : NICKEL
 - 2-2. NUT : Satin Nickel PLATED.
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 10A+1A
 - 3-2. Rated Voltage : 250V+125V
4. Environmental :
 - 4-1. Operation Temperature : -40 ℃~85℃

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:
		WP-DIN-16-4+4(7)-F-W-11.1-P-2-GF-B-N
Title: WATERPROOF DIN(F) SOLDER TYPE for CABLE 10A+1A		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/1
Approved By: Tony	REV.	A
	DWG NO.:	/
	Thire angle Projection	Units
	General Dimesion Tolerance	mm
	TOLERANCE	
	.x	±0.20
	.xx	±0.10
	.xxx	±0.05
	.xxxx	±0.03
	ANGULA	±1°


Rev	Revisions	Rev.Drawn	Date
A		Du	02/07/13

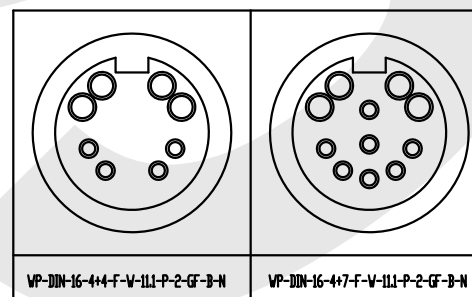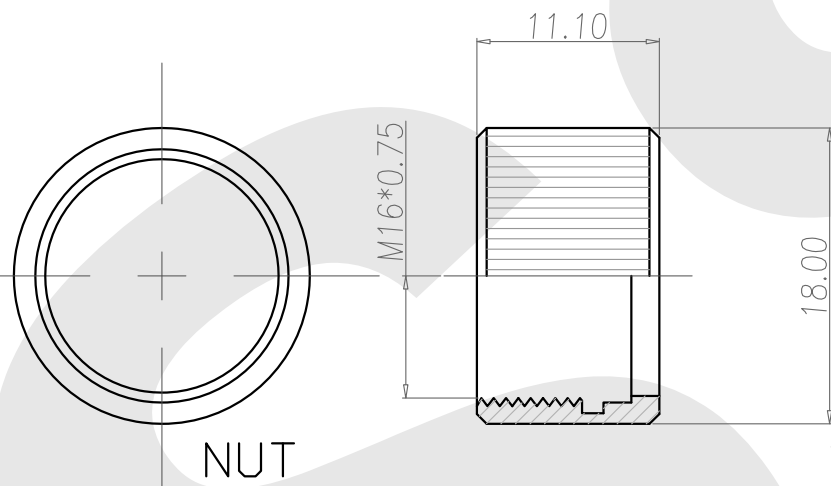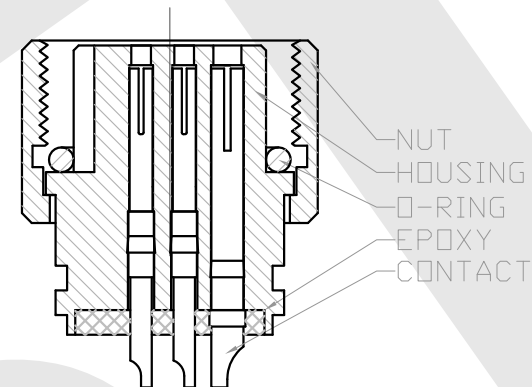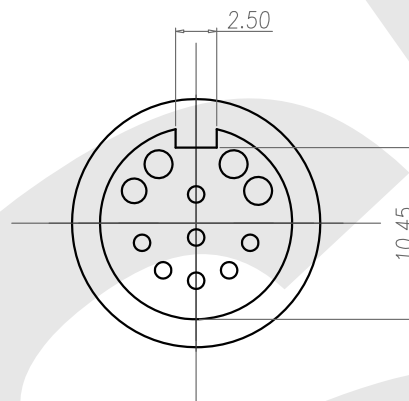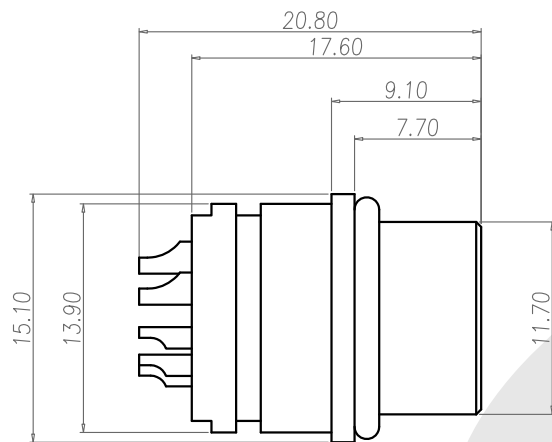

1. MATERIAL :
 - 1-1. HOUSING : PBT ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS.
 - 1-4. O-RING : EPDM ; COLOR : BLACK
2. FINISH :
 - 2-1. CONTACT : GOLD FLASH MICRO INCHES MIN. UNDER PLATE : NICKEL
 - 2-2. NUT : Satin Nickel PLATED.
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 10A+1A
 - 3-2. Rated Voltage : 250V+125V
4. Environmental :
 - 4-1. Operation Temperature : -40 °C~85°C

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:
		WP-DIN-16-4+4(7)-F-W-11.1-P-2-GF-B-N
Title: WATERPROOF DIN(F) SOLDER TYPE for CABLE 10A+1A		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/1
Approved By: Tony	REV.	A
	DWG NO.:	/
	Thire angle Projection	Units
	General Dimesion Tolerance	mm
	TOLERANCE	
	.x	±0.20
	.xx	±0.10
	.xxx	±0.05
	.xxxx	±0.03
	ANGULA	±1°

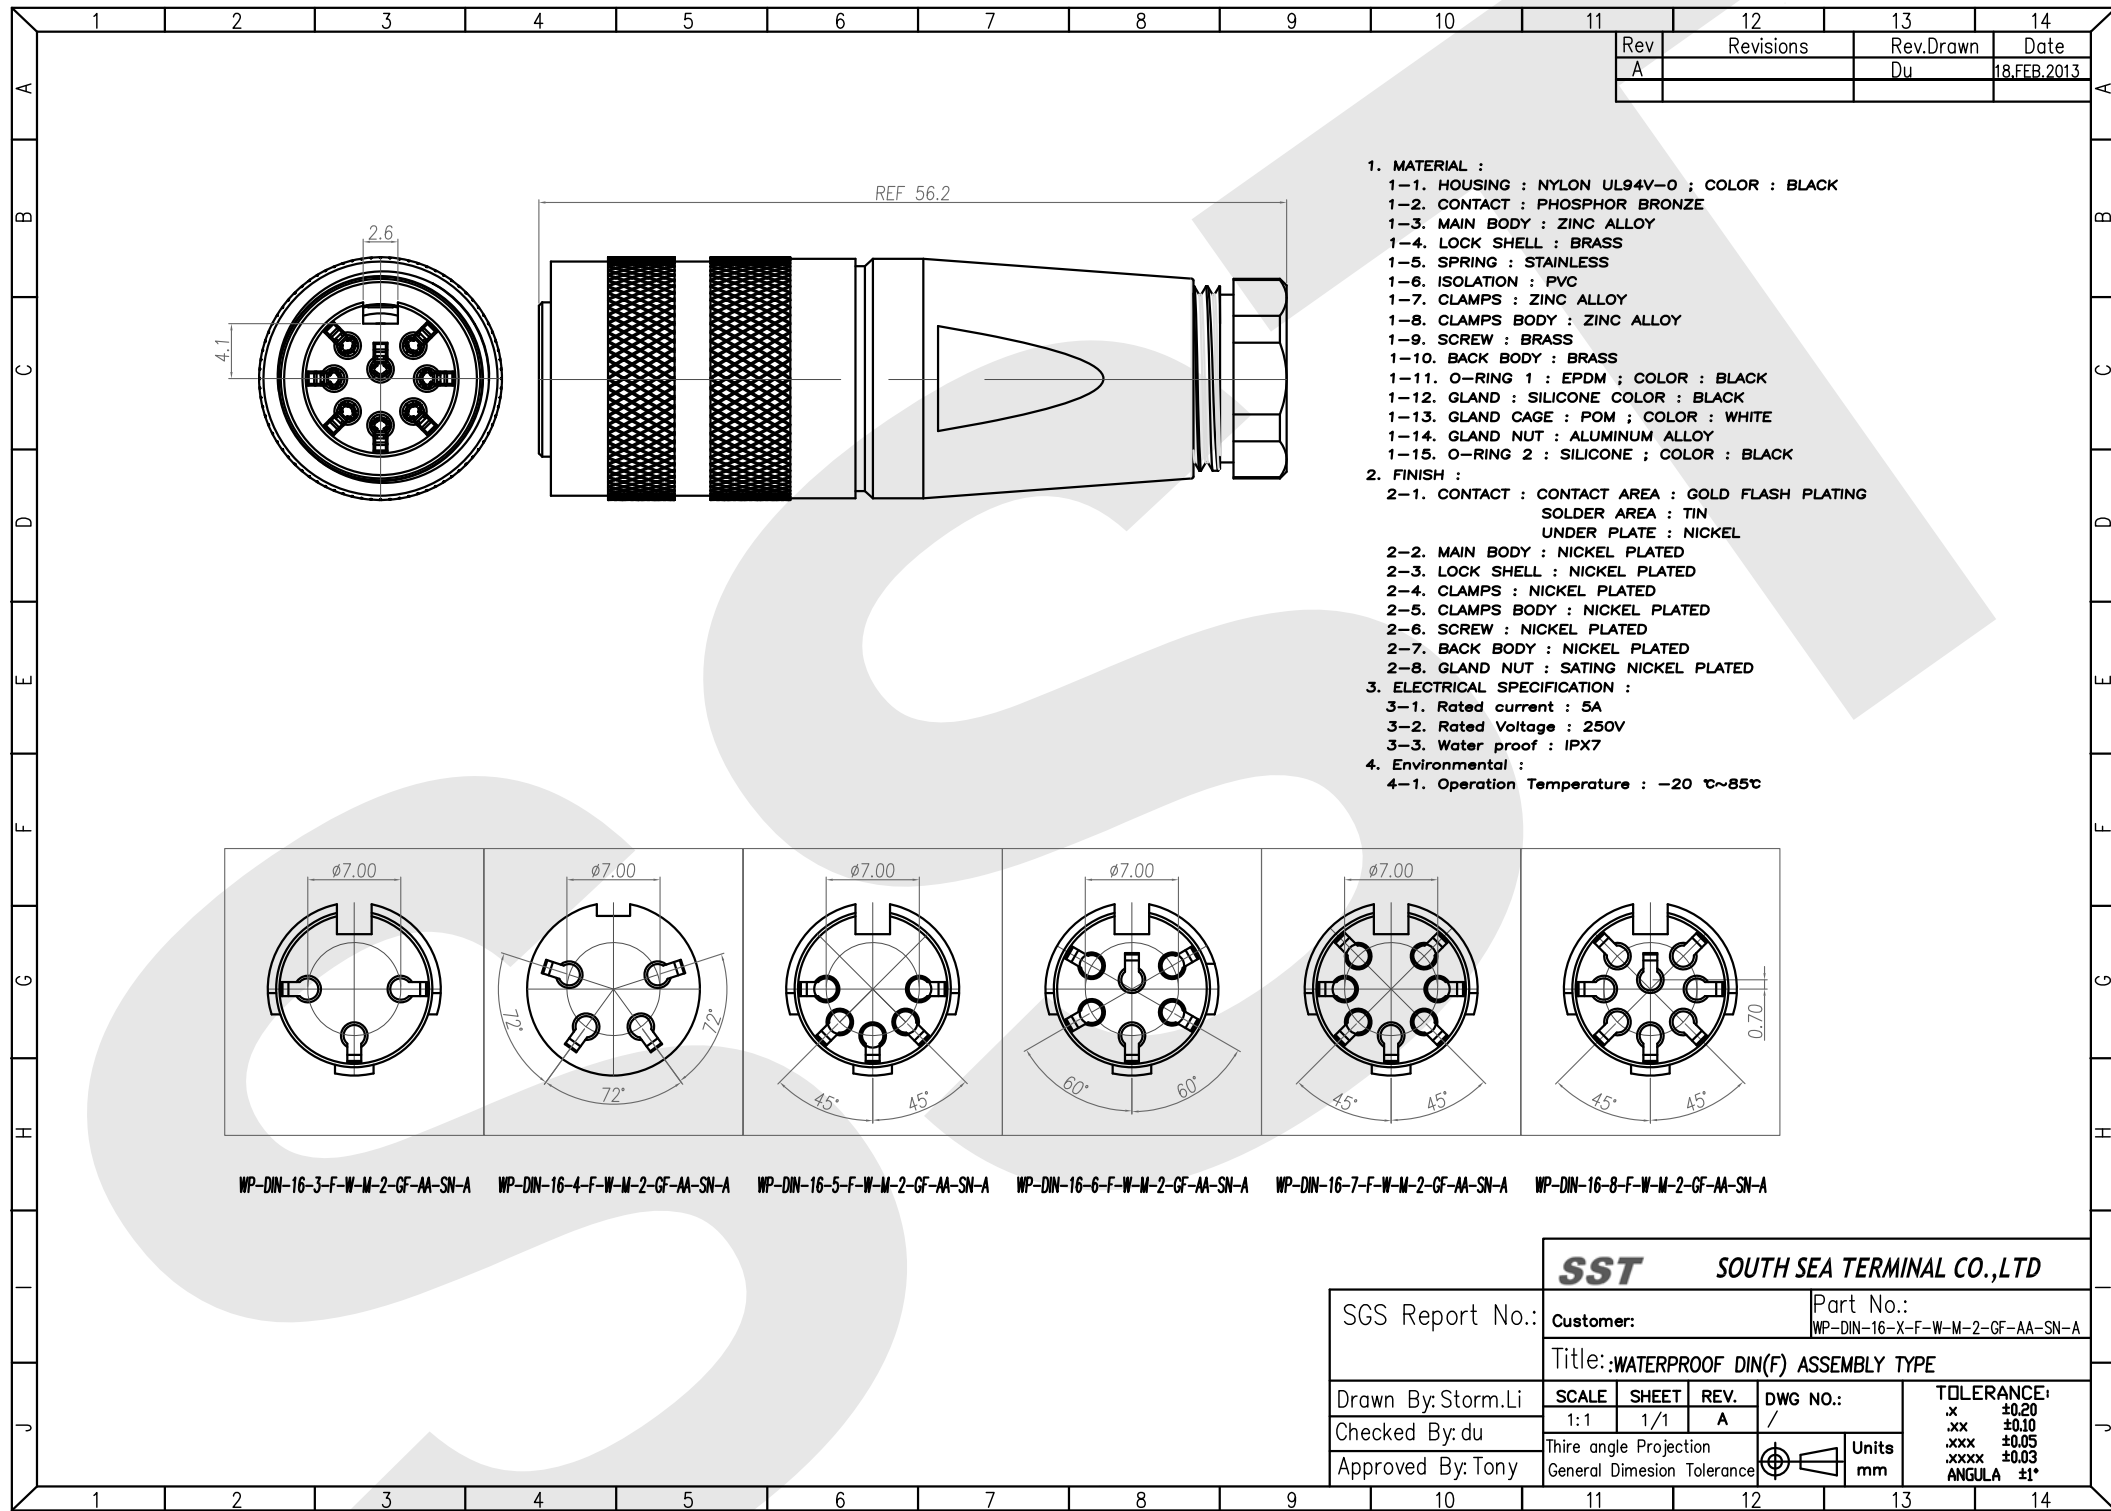


Rev	Revisions	Rev.Drawn	Date
A		Du	18.FEB.2013

1. MATERIAL :
- 1-1. HOUSING : NYLON UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. MAIN BODY : ZINC ALLOY
 - 1-4. LOCK SHELL : BRASS
 - 1-5. SPRING : STAINLESS
 - 1-6. ISOLATION : PVC
 - 1-7. CLAMPS : ZINC ALLOY
 - 1-8. CLAMPS BODY : ZINC ALLOY
 - 1-9. SCREW : BRASS
 - 1-10. BACK BODY : BRASS
 - 1-11. O-RING 1 : EPDM ; COLOR : BLACK
 - 1-12. GLAND : SILICONE COLOR : BLACK
 - 1-13. GLAND CAGE : POM ; COLOR : WHITE
 - 1-14. GLAND NUT : ALUMINUM ALLOY
 - 1-15. O-RING 2 : SILICONE ; COLOR : BLACK
2. FINISH :
- 2-1. CONTACT : CONTACT AREA : GOLD FLASH PLATING
SOLDER AREA : TIN
UNDER PLATE : NICKEL
 - 2-2. MAIN BODY : NICKEL PLATED
 - 2-3. LOCK SHELL : NICKEL PLATED
 - 2-4. CLAMPS : NICKEL PLATED
 - 2-5. CLAMPS BODY : NICKEL PLATED
 - 2-6. SCREW : NICKEL PLATED
 - 2-7. BACK BODY : NICKEL PLATED
 - 2-8. GLAND NUT : SATING NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 250V
 - 3-3. Water proof : IPX7
4. Environmental :
- 4-1. Operation Temperature : -20 ℃~85℃

WP-DIN-16-3-F-W-M-2-GF-AA-SN-A WP-DIN-16-4-F-W-M-2-GF-AA-SN-A WP-DIN-16-5-F-W-M-2-GF-AA-SN-A WP-DIN-16-6-F-W-M-2-GF-AA-SN-A WP-DIN-16-7-F-W-M-2-GF-AA-SN-A WP-DIN-16-8-F-W-M-2-GF-AA-SN-A

		SST SOUTH SEA TERMINAL CO.,LTD			
SGS Report No.:	Customer:			Part No.: WP-DIN-16-X-F-W-M-2-GF-AA-SN-A	
	Title: WATERPROOF DIN(F) ASSEMBLY TYPE				
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Checked By: du	1:1	1/1	A		
Approved By: Tony	Third angle Projection				Units mm
	General Dimesion Tolerance				

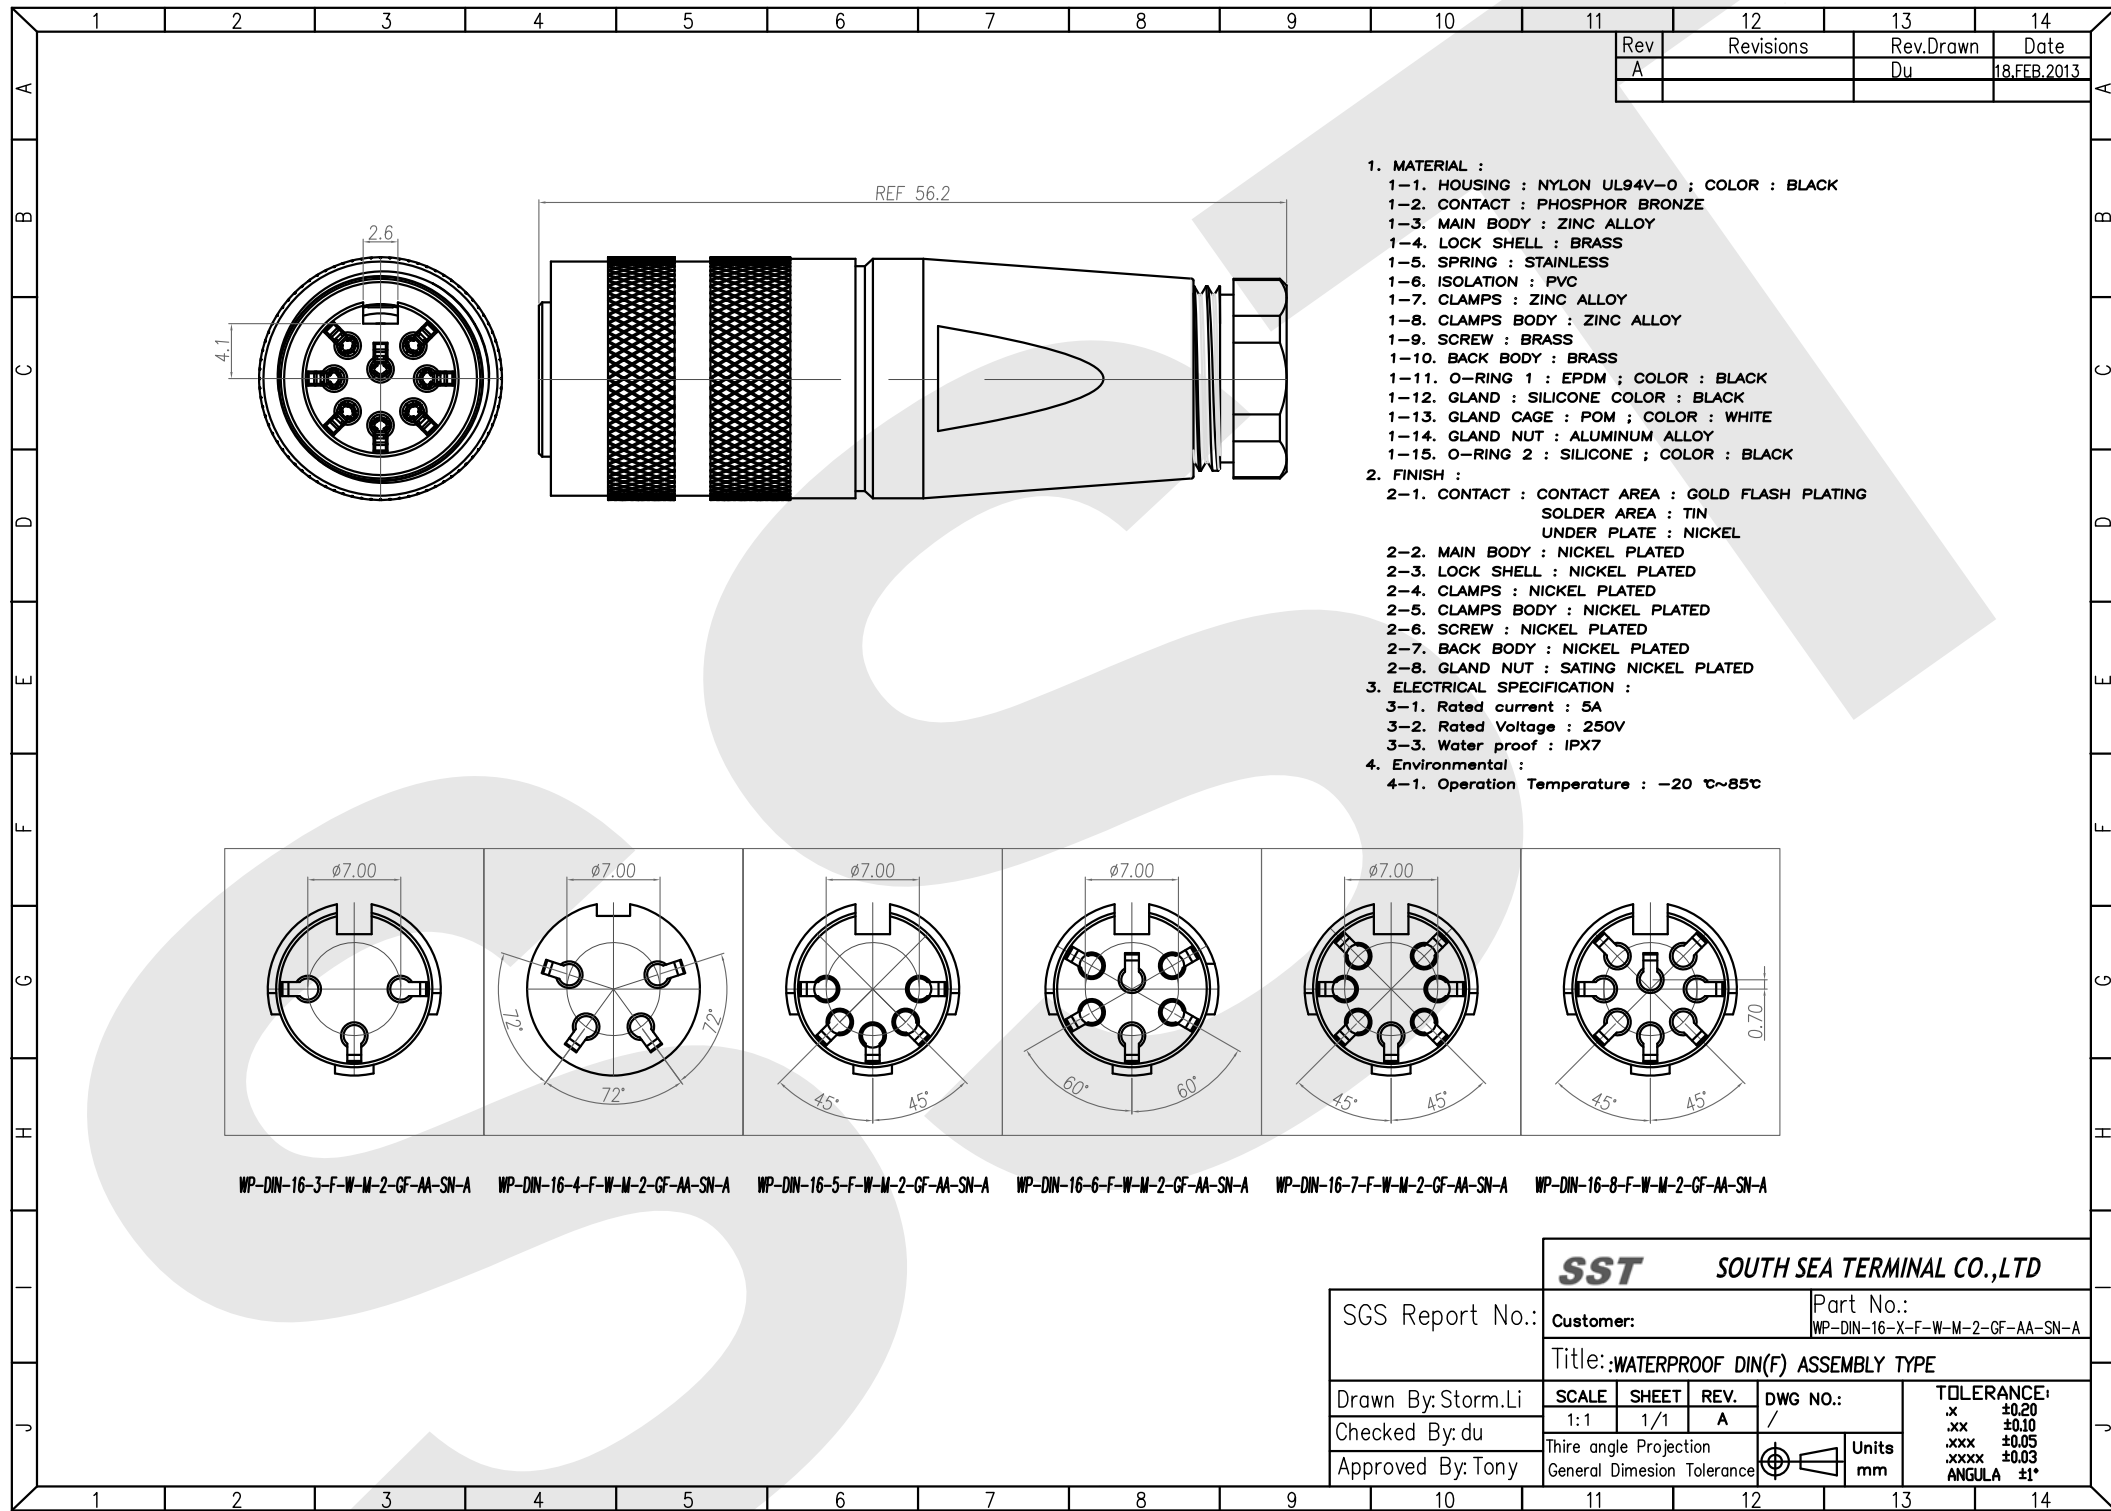


Rev	Revisions	Rev.Drawn	Date
A		Du	18.FEB.2013

1. MATERIAL :
- 1-1. HOUSING : NYLON UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. MAIN BODY : ZINC ALLOY
 - 1-4. LOCK SHELL : BRASS
 - 1-5. SPRING : STAINLESS
 - 1-6. ISOLATION : PVC
 - 1-7. CLAMPS : ZINC ALLOY
 - 1-8. CLAMPS BODY : ZINC ALLOY
 - 1-9. SCREW : BRASS
 - 1-10. BACK BODY : BRASS
 - 1-11. O-RING 1 : EPDM ; COLOR : BLACK
 - 1-12. GLAND : SILICONE COLOR : BLACK
 - 1-13. GLAND CAGE : POM ; COLOR : WHITE
 - 1-14. GLAND NUT : ALUMINUM ALLOY
 - 1-15. O-RING 2 : SILICONE ; COLOR : BLACK
2. FINISH :
- 2-1. CONTACT : CONTACT AREA : GOLD FLASH PLATING
SOLDER AREA : TIN
UNDER PLATE : NICKEL
 - 2-2. MAIN BODY : NICKEL PLATED
 - 2-3. LOCK SHELL : NICKEL PLATED
 - 2-4. CLAMPS : NICKEL PLATED
 - 2-5. CLAMPS BODY : NICKEL PLATED
 - 2-6. SCREW : NICKEL PLATED
 - 2-7. BACK BODY : NICKEL PLATED
 - 2-8. GLAND NUT : SATING NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 250V
 - 3-3. Water proof : IPX7
4. Environmental :
- 4-1. Operation Temperature : -20 ℃~85℃

WP-DIN-16-3-F-W-M-2-GF-AA-SN-A WP-DIN-16-4-F-W-M-2-GF-AA-SN-A WP-DIN-16-5-F-W-M-2-GF-AA-SN-A WP-DIN-16-6-F-W-M-2-GF-AA-SN-A WP-DIN-16-7-F-W-M-2-GF-AA-SN-A WP-DIN-16-8-F-W-M-2-GF-AA-SN-A

		SST SOUTH SEA TERMINAL CO.,LTD			
SGS Report No.:	Customer:			Part No.: WP-DIN-16-X-F-W-M-2-GF-AA-SN-A	
	Title: WATERPROOF DIN(F) ASSEMBLY TYPE				
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:	
Checked By: du	1:1	1/1	A	/	
Approved By: Tony	Third angle Projection				Units
	General Dimesion Tolerance				mm
				TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	

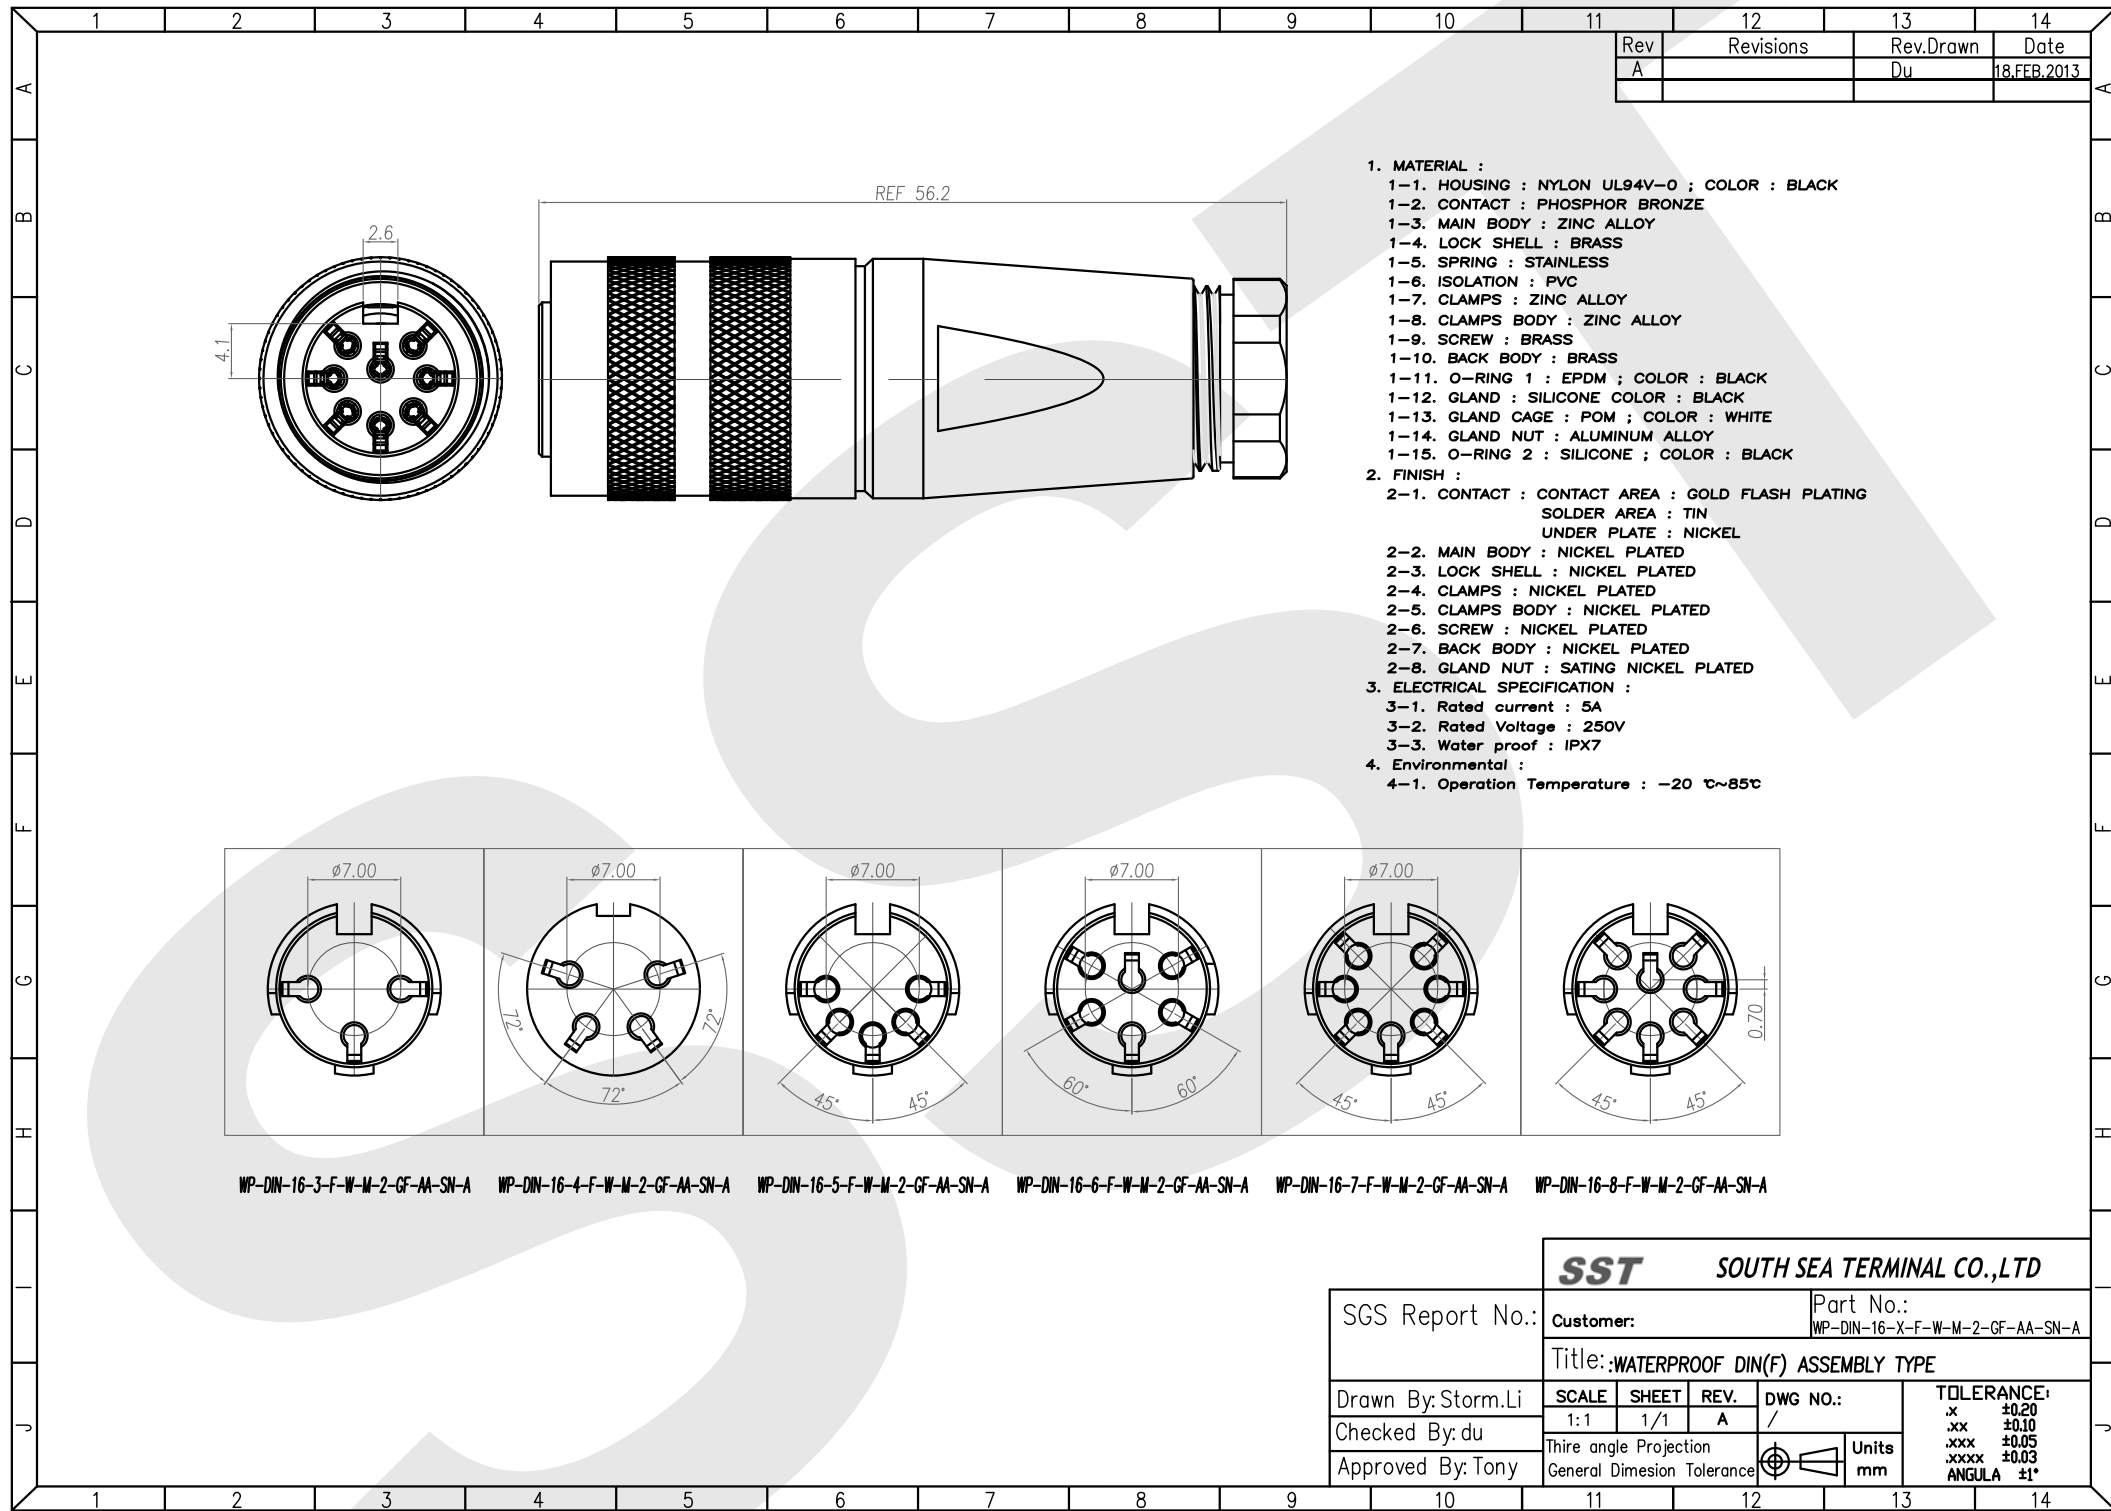

Rev	Revisions	Rev.Drawn	Date
A		Du	18.FEB.2013

1. MATERIAL :
- 1-1. HOUSING : NYLON UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. MAIN BODY : ZINC ALLOY
 - 1-4. LOCK SHELL : BRASS
 - 1-5. SPRING : STAINLESS
 - 1-6. ISOLATION : PVC
 - 1-7. CLAMPS : ZINC ALLOY
 - 1-8. CLAMPS BODY : ZINC ALLOY
 - 1-9. SCREW : BRASS
 - 1-10. BACK BODY : BRASS
 - 1-11. O-RING 1 : EPDM ; COLOR : BLACK
 - 1-12. GLAND : SILICONE COLOR : BLACK
 - 1-13. GLAND CAGE : POM ; COLOR : WHITE
 - 1-14. GLAND NUT : ALUMINUM ALLOY
 - 1-15. O-RING 2 : SILICONE ; COLOR : BLACK
2. FINISH :
- 2-1. CONTACT : CONTACT AREA : GOLD FLASH PLATING
SOLDER AREA : TIN
UNDER PLATE : NICKEL
 - 2-2. MAIN BODY : NICKEL PLATED
 - 2-3. LOCK SHELL : NICKEL PLATED
 - 2-4. CLAMPS : NICKEL PLATED
 - 2-5. CLAMPS BODY : NICKEL PLATED
 - 2-6. SCREW : NICKEL PLATED
 - 2-7. BACK BODY : NICKEL PLATED
 - 2-8. GLAND NUT : SATING NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 250V
 - 3-3. Water proof : IPX7
4. Environmental :
- 4-1. Operation Temperature : -20 ℃~85℃

WP-DIN-16-3-F-W-M-2-GF-AA-SN-A WP-DIN-16-4-F-W-M-2-GF-AA-SN-A WP-DIN-16-5-F-W-M-2-GF-AA-SN-A WP-DIN-16-6-F-W-M-2-GF-AA-SN-A WP-DIN-16-7-F-W-M-2-GF-AA-SN-A WP-DIN-16-8-F-W-M-2-GF-AA-SN-A

		SST SOUTH SEA TERMINAL CO.,LTD				
SGS Report No.:	Customer:			Part No.: WP-DIN-16-X-F-W-M-2-GF-AA-SN-A		
	Title: WATERPROOF DIN(F) ASSEMBLY TYPE					
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Checked By: du	1:1	1/1	A	/		
Approved By: Tony	Third angle Projection				Units mm	
	General Dimenstion Tolerance					

