




Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

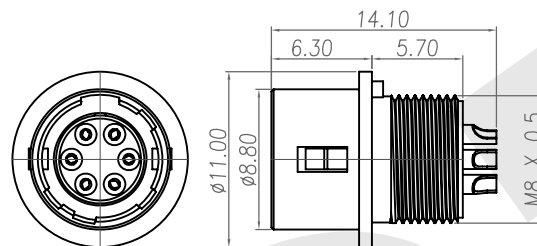

NUT

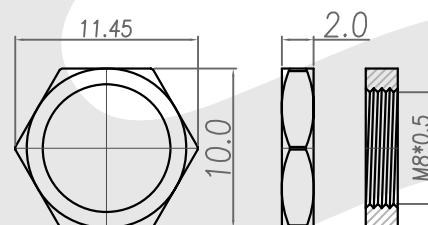

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle


TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-S	ST3A-08BR-05S-S	ST3A-08BR-06S-S	ST3A-08BR-07S-S


		SST SOUTH SEA TERMINAL CO.,LTD			
SGS Report No.:	Customer:	Part No.: ST3A-08BR-XXS-S			
	Title: P-P CONN. Panel/Case Receptacle Solder Type (F)				
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE:
Checked By:du	1:1	1/1	A	QC5665	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03
Approved By:Tony	Third angle Projection General Dimenion Tolerance				Units mm ANGULA ±1°

SST SOUTH SEA TERMINAL CO.,LTD


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

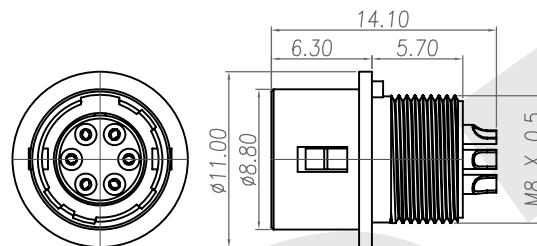

NUT

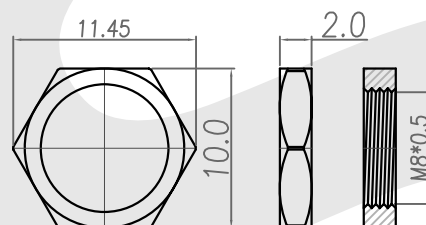

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR


Series ST3A-08BR-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

TABLE A


CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-S	ST3A-08BR-05S-S	ST3A-08BR-06S-S	ST3A-08BR-07S-S

		SST SOUTH SEA TERMINAL CO.,LTD				
SGS Report No.:	Customer:			Part No.: ST3A-08BR-XXS-S		
	Title: P-P CONN. Panel/Case Receptacle Solder Type (F)					
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By:du	1:1	1/1	A	QC5665		.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03
Approved By:Tony	Third angle Projection					Units mm
	General Dimenion Tolerance					
						ANGULA ±1°


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

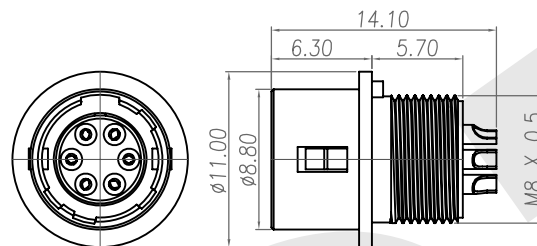

NUT

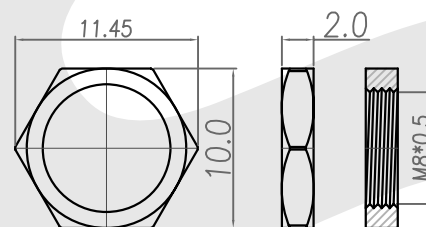

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series **ST3A-08BR-XXS-S**

Dimension of inner thread=M8

Poles
P: Plug
S: Female contact

D: Dip type
S: Solder type


WR: Wire Receptacle
BR: Panel / Case Receptacle

TABLE A


CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-S	ST3A-08BR-05S-S	ST3A-08BR-06S-S	ST3A-08BR-07S-S

		SST SOUTH SEA TERMINAL CO.,LTD			
SGS Report No.:	Customer:	Part No.: ST3A-08BR-XXS-S			
	Title: P-P CONN. Panel/Case Receptacle Solder Type (F)				
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE:
Checked By: du	1:1	1/1	A	QC5665	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03
Approved By:Tony	Thire angle Projection				Units mm
	General Dimenson Tolerance				


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

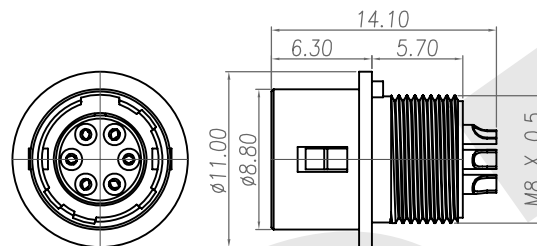

NUT

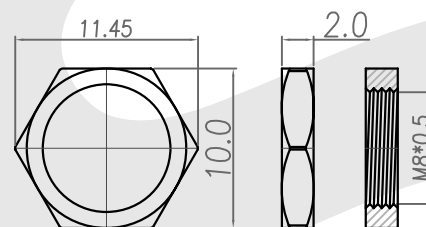

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series **ST3A-08BR-XXS-S**

Dimension of inner thread=M8

Poles
P: Plug
S: Female contact


D: Dip type
S: Solder type

WR: Wire Receptacle
BR: Panel / Case Receptacle


TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-S	ST3A-08BR-05S-S	ST3A-08BR-06S-S	ST3A-08BR-07S-S


		SST SOUTH SEA TERMINAL CO.,LTD				
SGS Report No.:		Customer:			Part No.: ST3A-08BR-XXS-S	
		Title: P-P CONN. Panel/Case Receptacle Solder Type (F)				
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By:du	1:1	1/1	A	QC5665		.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03
Approved By:Tony	Thire angle Projection					Units
	General Dimenson Tolerance					mm





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

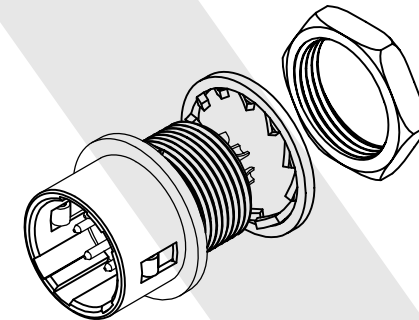

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXP-S

Dimension of inner thread=M8

Poles: P: Plug S: Female contact

P: Male contact S: Female contact

WR: Wire Receptacle


BR: Panel / Case Receptacle

CONTACT ARRANGEMENT(FRONT VIEW)


ST3A-08BR-04P-S	ST3A-08BR-05P-S	ST3A-08BR-06P-S	ST3A-08BR-07P-S

SST SOUTH SEA TERMINAL CO.,LTD


SGS Report No.:	Customer:	Part No.:
		ST3A-08BR-XXP-S
Title: P-P CONN. Panel/Case Receptacle Solder Type (M)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/1
Approved By: Tony	REV.	A
	DWG NO.:	QC5664
	Thire angle Projection	Units
	General Dimesion Tolerance	mm
	TOLERANCE:	
	.x	±0.20
	.xx	±0.10
	.xxx	±0.05
	.xxxx	±0.03
	ANGULA	±1°





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

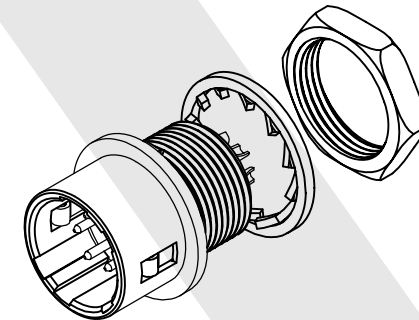

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXP-S

Dimension of inner thread=M8

Poles: P: Plug S: Female contact

P: Male contact S: Female contact

WR: Wire Receptacle


BR: Panel / Case Receptacle

CONTACT ARRANGEMENT(FRONT VIEW)


ST3A-08BR-04P-S	ST3A-08BR-05P-S	ST3A-08BR-06P-S	ST3A-08BR-07P-S

SST SOUTH SEA TERMINAL CO.,LTD


SGS Report No.:	Customer:	Part No.:
		ST3A-08BR-XXP-S
Title: P-P CONN. Panel/Case Receptacle Solder Type (M)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/1
Approved By: Tony	REV.	A
	DWG NO.:	QC5664
	Thire angle Projection	Units
	General Dimesion Tolerance	mm
	TOLERANCE:	
	.x	±0.20
	.xx	±0.10
	.xxx	±0.05
	.xxxx	±0.03
	ANGULA	±1°





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

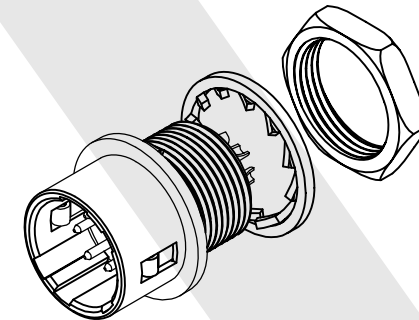

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series **ST3A-08BR-XXP-S**

Dimension of inner thread=M8

Poles: P: Plug, S: Female contact

P: Male contact, S: Female contact


WR: Wire Receptacle, BR: Panel / Case Receptacle

CONTACT ARRANGEMENT(FRONT VIEW)


ST3A-08BR-04P-S	ST3A-08BR-05P-S	ST3A-08BR-06P-S	ST3A-08BR-07P-S

SST SOUTH SEA TERMINAL CO.,LTD


SGS Report No.:	Customer:	Part No.:
		ST3A-08BR-XXP-S
Title: P-P CONN. Panel/Case Receptacle Solder Type (M)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/1
Approved By: Tony	REV.	A
	DWG NO.:	QC5664
	Thire angle Projection	Units
	General Dimesion Tolerance	mm
	TOLERANCE:	
	.x	±0.20
	.xx	±0.10
	.xxx	±0.05
	.xxxx	±0.03
	ANGULA	±1°





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

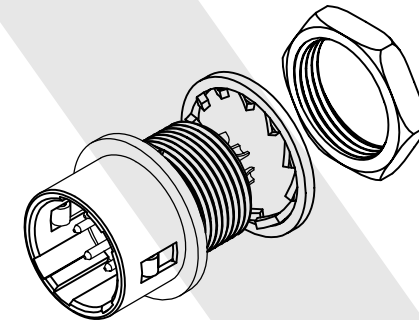

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXP-S

Dimension of inner thread=M8

Poles: P: Plug S: Female contact

P: Male contact S: Female contact

WR: Wire Receptacle


BR: Panel / Case Receptacle

CONTACT ARRANGEMENT(FRONT VIEW)


ST3A-08BR-04P-S	ST3A-08BR-05P-S	ST3A-08BR-06P-S	ST3A-08BR-07P-S

SST SOUTH SEA TERMINAL CO.,LTD


SGS Report No.:	Customer:	Part No.:
		ST3A-08BR-XXP-S
Title: P-P CONN. Panel/Case Receptacle Solder Type (M)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/1
Approved By: Tony	REV.	A
	DWG NO.:	QC5664
	Thire angle Projection	Units
	General Dimesion Tolerance	mm
	TOLERANCE:	
	.x	±0.20
	.xx	±0.10
	.xxx	±0.05
	.xxxx	±0.03
	ANGULA	±1°




RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

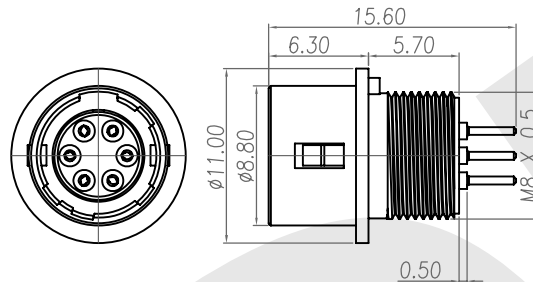

NUT

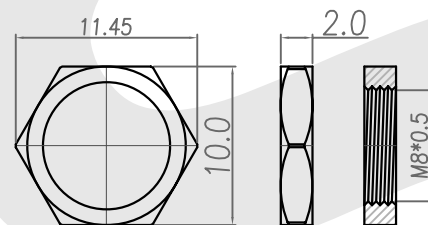

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXS-D

Dimension of inner thread=M8

Poles

P: Plug

WR: Wire Receptacle

BR: Panel / Case Receptacle

D: Dip type

S: Solder type

P: Male contact

S: Female contact




TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-D	ST3A-08BR-05S-D	ST3A-08BR-06S-D	ST3A-08BR-07S-D

SGS Report No.:

SST SOUTH SEA TERMINAL CO.,LTD

Customer:

Part No.:
ST3A-08BR-XXS-D

Title: P-P CONN. Panel/Case Receptacle Dip Type (F)

Drawn By:Storm.Li

Checked By:du

Approved By:Tony

SCALE

1:1

Thire angle Projection

SHEET

1/1

General Dimesion Tolerance

REV.

A

Units

DWG NO.:

QC5669

mm

TOLERANCE:

.x ±0.20


.xx ±0.10

.xxx ±0.05


.xxxx ±0.03

ANGULA ±1°



Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012




RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

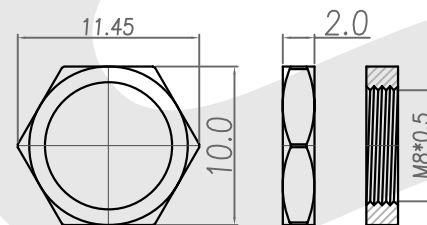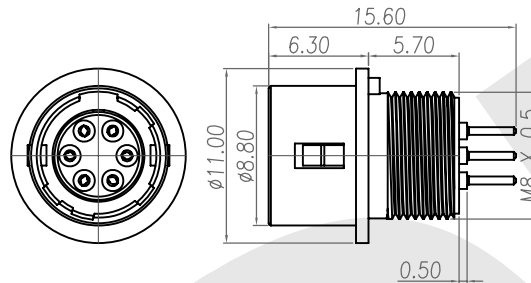

NUT



1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXS-D

Dimension of inner thread=M8

Poles 4

P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle


D: Dip type
S: Solder type

P: Male contact
S: Female contact


TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-D	ST3A-08BR-05S-D	ST3A-08BR-06S-D	ST3A-08BR-07S-D


		SST SOUTH SEA TERMINAL CO.,LTD				
SGS Report No.:	Customer:			Part No.:		
				ST3A-08BR-XXS-D		
Title: <i>P-P CONN. Panel/Case Receptacle Dip Type (F)</i>						
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Checked By:du	1:1	1/1	A	QC5669		
Approved By: Tony	Third angle Projection				Units mm	
	General Dimension Tolerance					




RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

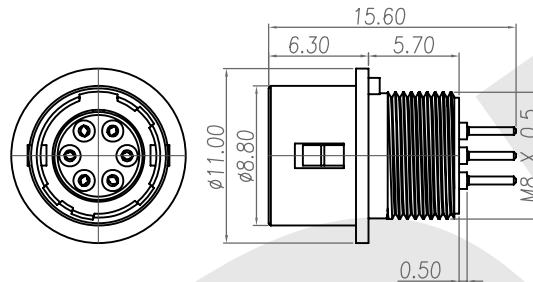

NUT

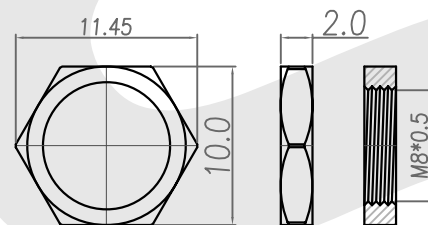

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXS-D

Dimension of inner thread=M8

Poles

P: Plug

WR: Wire Receptacle

BR: Panel / Case Receptacle

D: Dip type

S: Solder type

P: Male contact

S: Female contact




TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-D	ST3A-08BR-05S-D	ST3A-08BR-06S-D	ST3A-08BR-07S-D

SGS Report No.:

SST SOUTH SEA TERMINAL CO.,LTD

Customer:

Part No.:
ST3A-08BR-XXS-D

Title: P-P CONN. Panel/Case Receptacle Dip Type (F)

Drawn By: Storm.Li

Checked By: du

Approved By: Tony

SCALE

1:1

Thire angle Projection

SHEET

1/1

General Dimesion Tolerance

REV.

A

Units

DWG NO.:

QC5669

mm

TOLERANCE:


.x ±0.20

.xx ±0.10


.xxx ±0.05

.xxxx ±0.03


ANGULA ±1°




RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

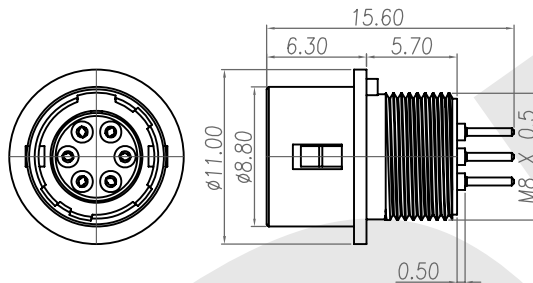

NUT

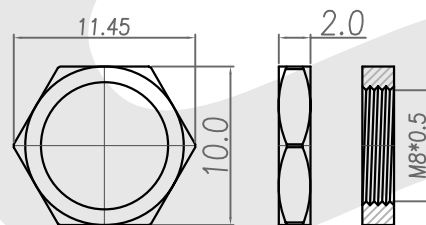

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXS-D

Dimension of inner thread=M8

Poles

P: Plug

WR: Wire Receptacle

BR: Panel / Case Receptacle

D: Dip type

S: Solder type

P: Male contact

S: Female contact




TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-D	ST3A-08BR-05S-D	ST3A-08BR-06S-D	ST3A-08BR-07S-D

SGS Report No.:

SST SOUTH SEA TERMINAL CO.,LTD

Customer:

Part No.:
ST3A-08BR-XXS-D

Title: P-P CONN. Panel/Case Receptacle Dip Type (F)

Drawn By: Storm.Li

Checked By: du

Approved By: Tony

SCALE

1:1

Thire angle Projection

SHEET

1/1

General Dimesion Tolerance

REV.

A

Units

DWG NO.:

QC5669

mm

TOLERANCE:

.x ±0.20


.xx ±0.10

.xxx ±0.05


.xxxx ±0.03

ANGULA ±1°


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

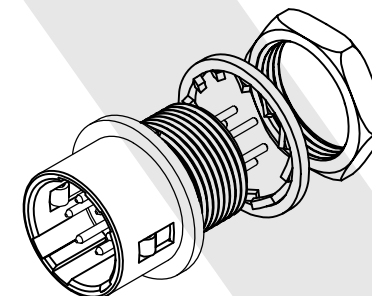

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR


Series ST3A-08BR-XXP-D D: Dip type
 Dimension of inner thread=M8 S: Solder type
 P: Plug P: Male contact
 S: Female contact
 Poles
 WR: Wire Receptacle
 BR: Panel / Case Receptacle

TABLE A


CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04P-D	ST3A-08BR-05P-D	ST3A-08BR-06P-D	ST3A-08BR-07P-D

SST							SOUTH SEA TERMINAL CO.,LTD								
SGS Report No.:		Customer:				Part No.: ST3A-08BR-XXP-D		Title: P-P CONN. Panel / Case Receptacle Dip Type (M)							
Drawn By: Storm.Li		SCALE		SHEET		REV.		DWG NO.: QC5668		TOLERANCE: .X ±0.20 .XX ±0.10 .XXX ±0.05 .XXXX ±0.03 ANGULA ±1°					
Checked By: du		1:1		1/1		A									
Approved By: Tony		Third angle Projection						Units mm							
		General Dimesion Tolerance													


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

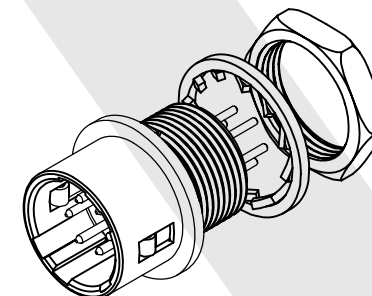

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR


Series ST3A-08BR-XXP-D D: Dip type
 Dimension of inner thread=M8 S: Solder type
 P: Plug P: Male contact
 S: Female contact
 Poles
 WR: Wire Receptacle
 BR: Panel / Case Receptacle

TABLE A


CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04P-D	ST3A-08BR-05P-D	ST3A-08BR-06P-D	ST3A-08BR-07P-D

SST							SOUTH SEA TERMINAL CO.,LTD								
SGS Report No.:		Customer:				Part No.: ST3A-08BR-XXP-D		Title: P-P CONN. Panel / Case Receptacle Dip Type (M)							
Drawn By: Storm.Li		SCALE		SHEET		REV.		DWG NO.: QC5668		TOLERANCE: .X ±0.20 .XX ±0.10 .XXX ±0.05 .XXXX ±0.03 ANGULA ±1°					
Checked By: du		1:1		1/1		A									
Approved By: Tony		Third angle Projection						Units mm							
		General Dimesion Tolerance													


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

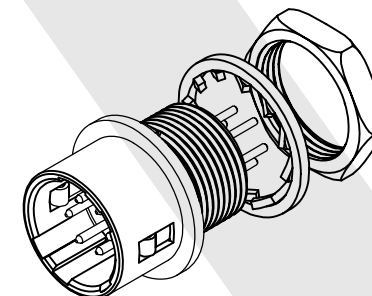

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR


Series ST3A-08BR-XXP-D D: Dip type
 Dimension of inner thread=M8 S: Solder type
 P: Plug P: Male contact
 S: Female contact
 WR: Wire Receptacle
 BR: Panel / Case Receptacle

TABLE A


CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04P-D	ST3A-08BR-05P-D	ST3A-08BR-06P-D	ST3A-08BR-07P-D

SST							SOUTH SEA TERMINAL CO.,LTD			
SGS Report No.:		Customer:			Part No.:					
					ST3A-08BR-XXP-D					
		Title: P-P CONN. Panel / Case Receptacle Dip Type (M)								
Drawn By: Storm.Li		SCALE	SHEET	REV.	DWG NO.:			TOLERANCE:		
Checked By: du		1:1	1/1	A	QC5668			.x ±0.20		
Approved By: Tony		Third angle Projection						.xx ±0.10		
		General Dimesion Tolerance						.xxx ±0.05		
					Units			.xxxx ±0.03		
					mm			ANGULA ±1°		


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

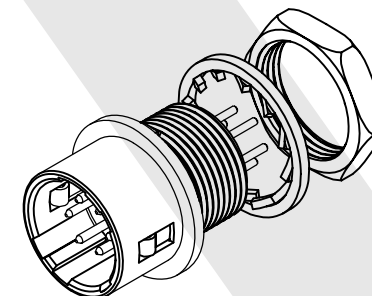

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR





Series ST3A-08BR-XXP-D D: Dip type
 Dimension of inner thread=M8 S: Solder type
 P: Plug P: Male contact
 S: Female contact
 WR: Wire Receptacle
 BR: Panel / Case Receptacle


TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04P-D	ST3A-08BR-05P-D	ST3A-08BR-06P-D	ST3A-08BR-07P-D

SST							SOUTH SEA TERMINAL CO.,LTD		
SGS Report No.:		Customer:			Part No.:				
					ST3A-08BR-XXP-D				
		Title: P-P CONN. Panel / Case Receptacle Dip Type (M)							
Drawn By: Storm.Li		SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:		
Checked By: du		1:1	1/1	A	QC5668		.x ±0.20		
Approved By: Tony		Third angle Projection					Units		.xxx ±0.10
		General Dimesion Tolerance					mm	.xxxx ±0.03	
							ANGULA		±1°


TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08P-04S-S	ST3A-08P-05S-S	ST3A-08P-06S-S	ST3A-08P-07S-S

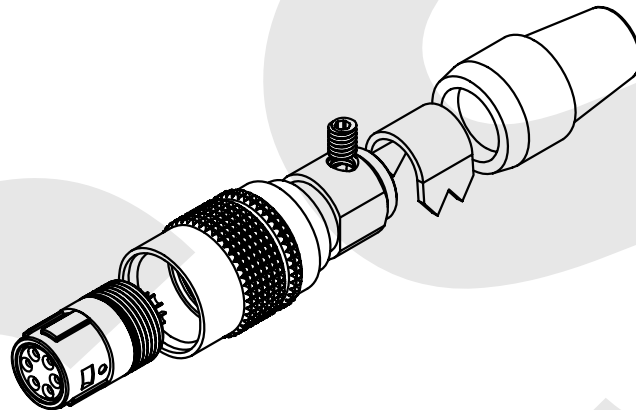

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08 P-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

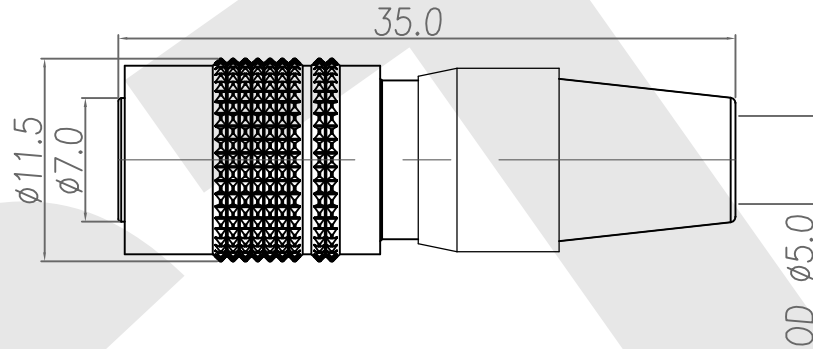

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SPRING : STAINLESS STEEL
- 1-7. SCREW : ALLOY STEEL
- 1-8. CLAMP : BRASS
- 1-9. SR : NBR ; COLOR : BLACK

2. FINISH :





- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : SATIN NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SPRING : NICKEL
- 2-6. SCREW : NICKEL


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:
		ST3A-08P-XXS-S
Title: P-P CONN. Plug Solder Type (F)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/2
Approved By: Tony	REV.	A
DWG NO.: QC5663		TOLERANCE:
Third angle Projection		.x ±0.20
General Dimension Tolerance		.xx ±0.10
		.xxx ±0.05
		.xxxx ±0.03
		ANGULA ±1°


TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08P-04S-S	ST3A-08P-05S-S	ST3A-08P-06S-S	ST3A-08P-07S-S

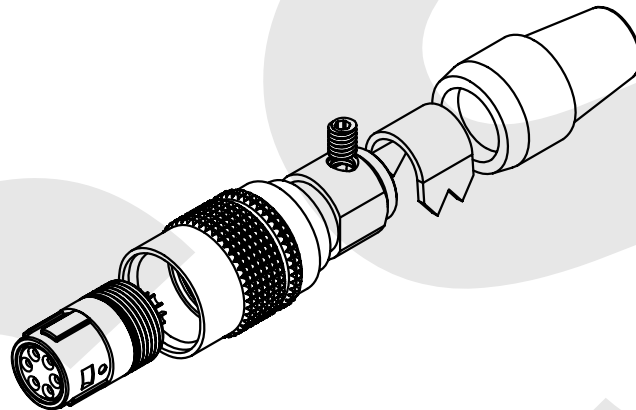

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08 P-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

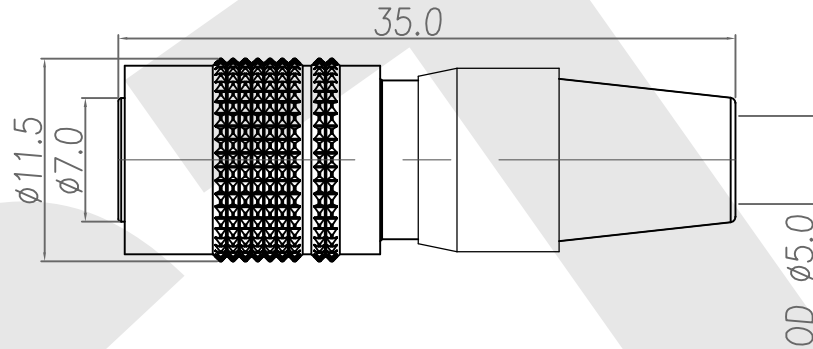

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SPRING : STAINLESS STEEL
- 1-7. SCREW : ALLOY STEEL
- 1-8. CLAMP : BRASS
- 1-9. SR : NBR ; COLOR : BLACK

2. FINISH :





- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : SATIN NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SPRING : NICKEL
- 2-6. SCREW : NICKEL


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:
		ST3A-08P-XXS-S
Title: P-P CONN. Plug Solder Type (F)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/2
Approved By: Tony	REV.	A
DWG NO.: QC5663		TOLERANCE:
Third angle Projection		.x ±0.20
General Dimension Tolerance		.xx ±0.10
		.xxx ±0.05
		.xxxx ±0.03
		ANGULA ±1°


TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08P-04S-S	ST3A-08P-05S-S	ST3A-08P-06S-S	ST3A-08P-07S-S

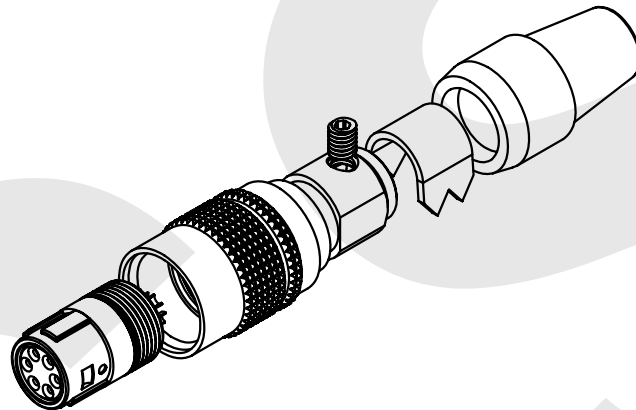

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08 P-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

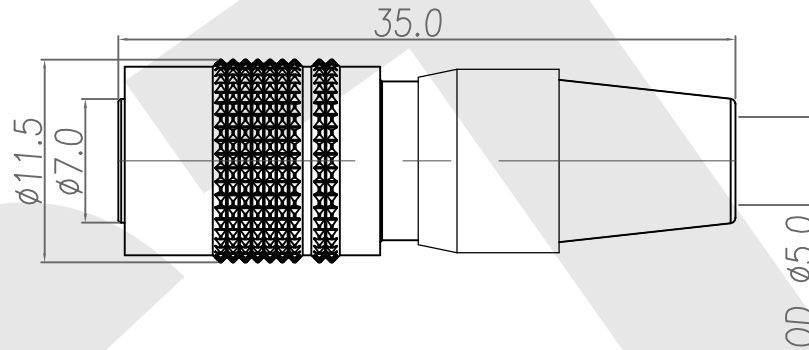

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SPRING : STAINLESS STEEL
- 1-7. SCREW : ALLOY STEEL
- 1-8. CLAMP : BRASS
- 1-9. SR : NBR ; COLOR : BLACK

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : SATIN NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SPRING : NICKEL
- 2-6. SCREW : NICKEL

SST**SOUTH SEA TERMINAL CO.,LTD**

SGS Report No.:

Customer:

Part No.:

ST3A-08P-XXS-S

Title: P-P CONN. Plug Solder Type (F)

Drawn By: Storm.Li

SCALE

SHEET

REV.

DWG NO.:

TOLERANCE:

Checked By: du

1:1

1/2

A

QC5663

.x ±0.20

Approved By: Tony

Third angle Projection

General Dimension Tolerance

Units

mm





.xx ±0.10


.xxx ±0.05

.xxxx ±0.03

ANGULA ±1°


TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08P-04S-S	ST3A-08P-05S-S	ST3A-08P-06S-S	ST3A-08P-07S-S

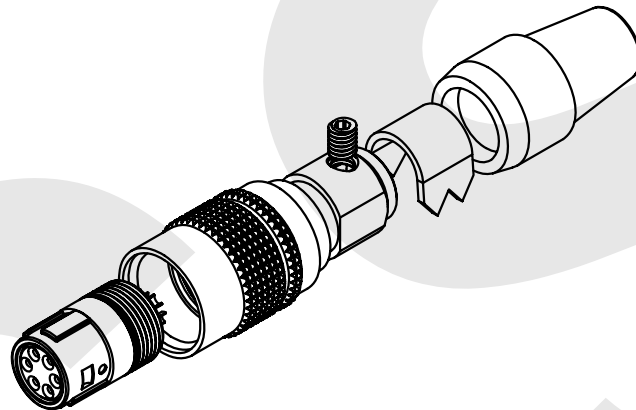

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08 P-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

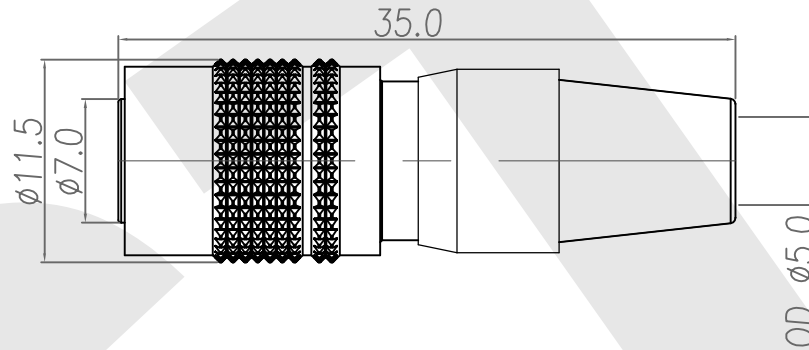

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SPRING : STAINLESS STEEL
- 1-7. SCREW : ALLOY STEEL
- 1-8. CLAMP : BRASS
- 1-9. SR : NBR ; COLOR : BLACK

2. FINISH :





- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : SATIN NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SPRING : NICKEL
- 2-6. SCREW : NICKEL



Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:
		ST3A-08P-XXS-S
Title: P-P CONN. Plug Solder Type (F)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/2
Approved By: Tony	REV.	A
DWG NO.: QC5663		TOLERANCE:
Third angle Projection		.x ±0.20
General Dimension Tolerance		.xx ±0.10
		.xxx ±0.05
		.xxxx ±0.03
		ANGULA ±1°

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08P-04P-S	ST3A-08P-05P-S	ST3A-08P-06P-S	ST3A-08P-07P-S

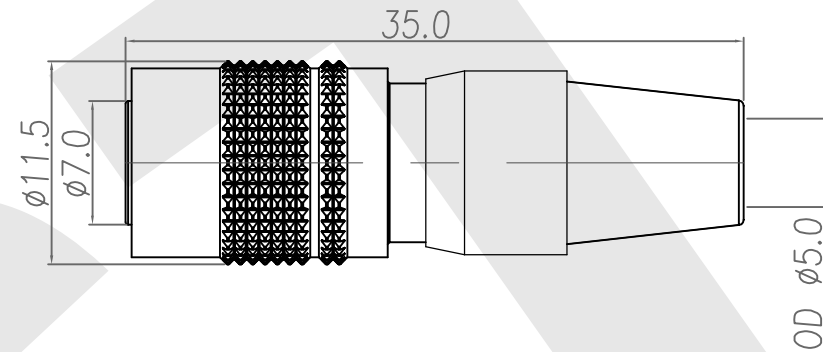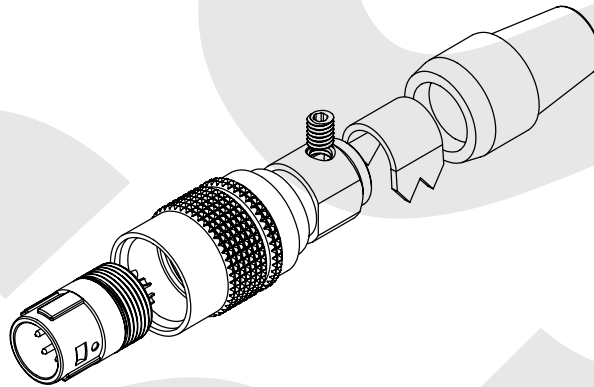

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SPRING : STAINLESS STEEL
- 1-7. SCREW : ALLOY STEEL
- 1-8. CLAMP : BRASS
- 1-9. SR : NBR ; COLOR : BLACK

2. FINISH :


- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : SATIN NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SPRING : NICKEL
- 2-6. SCREW : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08 P-XXP-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

SST SOUTH SEA TERMINAL CO.,LTD





SGS Report No.:	Customer:	Part No.:
		ST3A-08P-XXP-S
Title: P-P CONN. Plug Solder Type (M)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/2
Approved By: Tony	REV. A	DWG NO.: QC5662
Third angle Projection		Units mm
General Dimension Tolerance		TOLERANCE:
		.x ±0.20
		.xx ±0.10
		.xxx ±0.05
		.xxxx ±0.03
		ANGULA ±1°


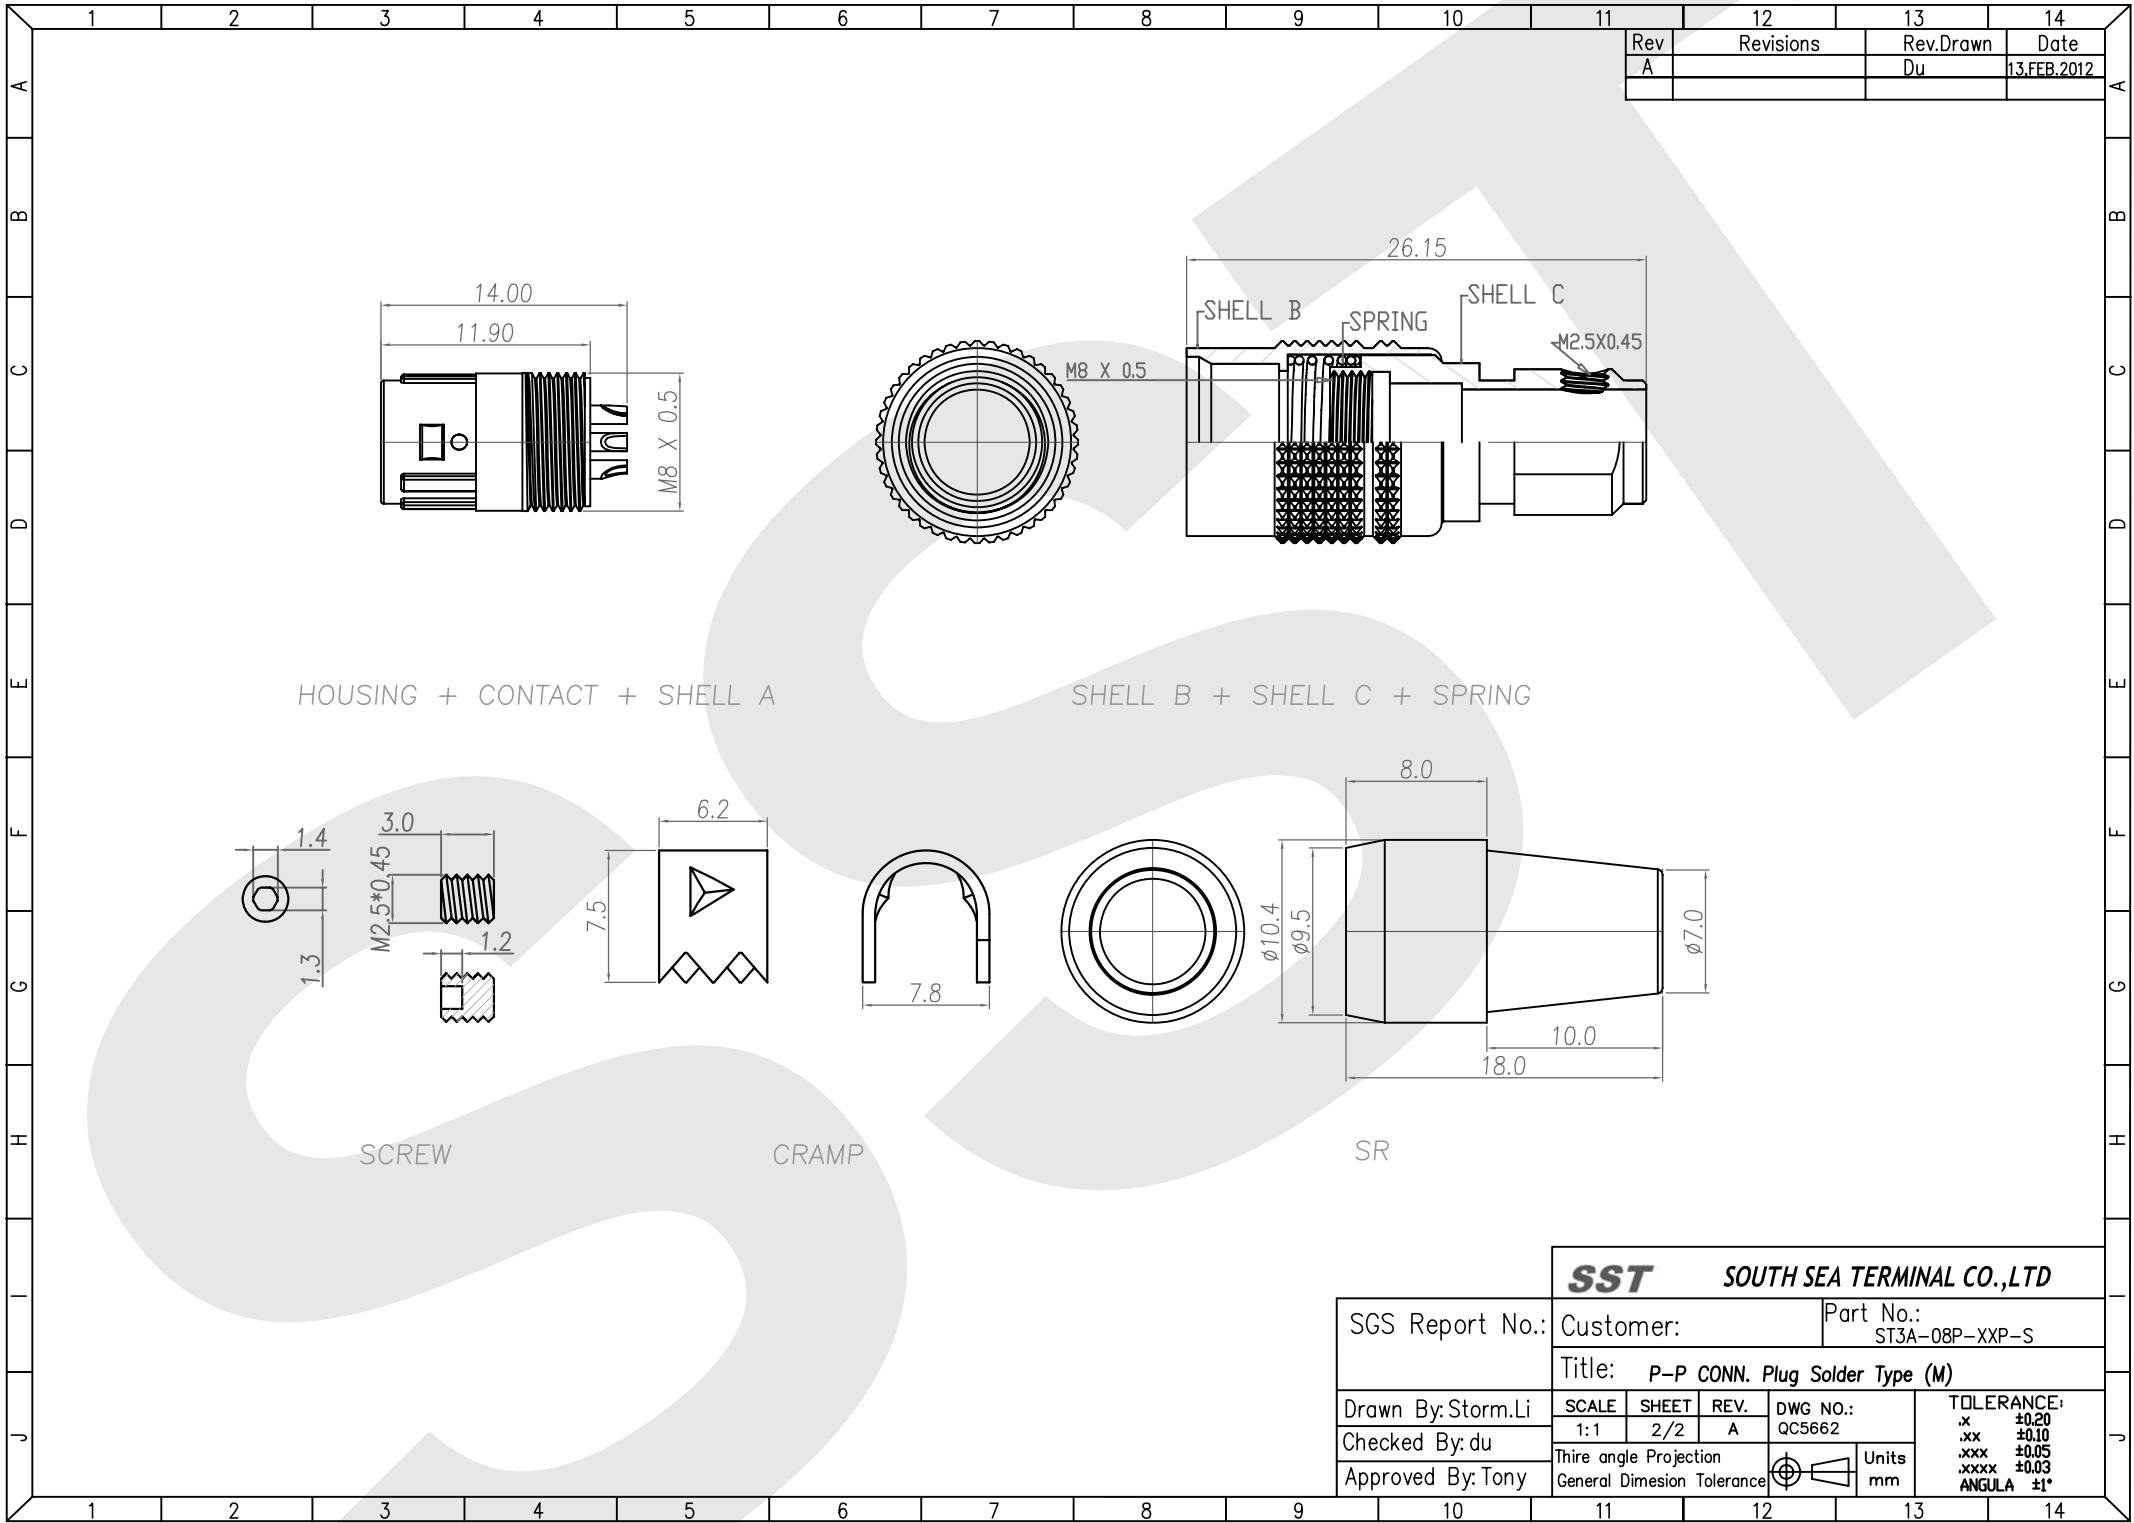


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST		SOUTH SEA TERMINAL CO.,LTD	
SGS Report No.:		Customer:	Part No.: ST3A-08P-XXP-S
Title: P-P CONN. Plug Solder Type (M)			
Drawn By:Storm.Li	SCALE 1:1	SHEET 2/2	REV. A
Checked By:du	DWG NO.: QC5662		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Approved By: Tony	Thire angle Projection General Dimesion Tolerance		Units mm

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08P-04P-S	ST3A-08P-05P-S	ST3A-08P-06P-S	ST3A-08P-07P-S

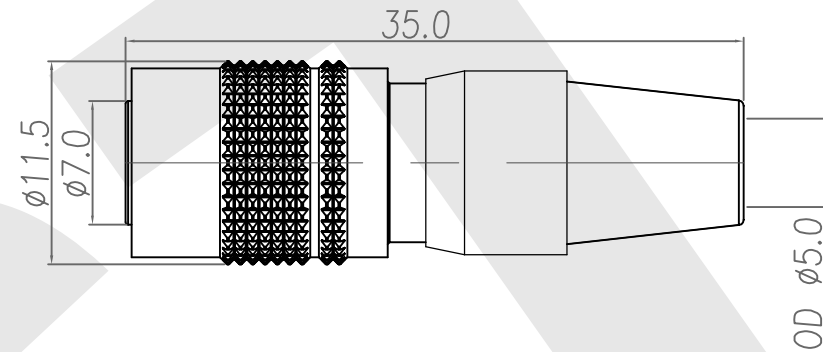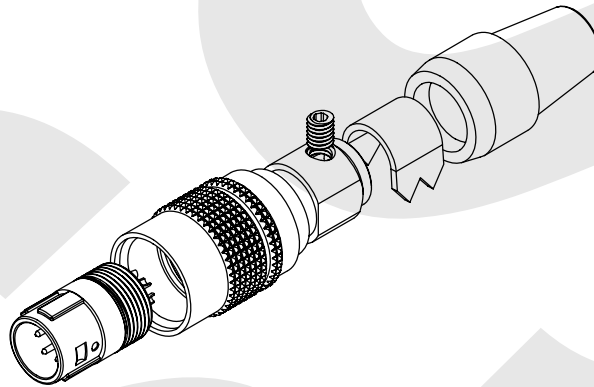

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SPRING : STAINLESS STEEL
- 1-7. SCREW : ALLOY STEEL
- 1-8. CLAMP : BRASS
- 1-9. SR : NBR ; COLOR : BLACK

2. FINISH :


- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : SATIN NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SPRING : NICKEL
- 2-6. SCREW : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08 P-XXP-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

SST SOUTH SEA TERMINAL CO.,LTD





SGS Report No.:	Customer:	Part No.:
		ST3A-08P-XXP-S
Title: P-P CONN. Plug Solder Type (M)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/2
Approved By: Tony	REV. A	DWG NO.: QC5662
Third angle Projection		Units mm
General Dimension Tolerance		TOLERANCE:
		.x ±0.20
		.xx ±0.10
		.xxx ±0.05
		.xxxx ±0.03
		ANGULA ±1°


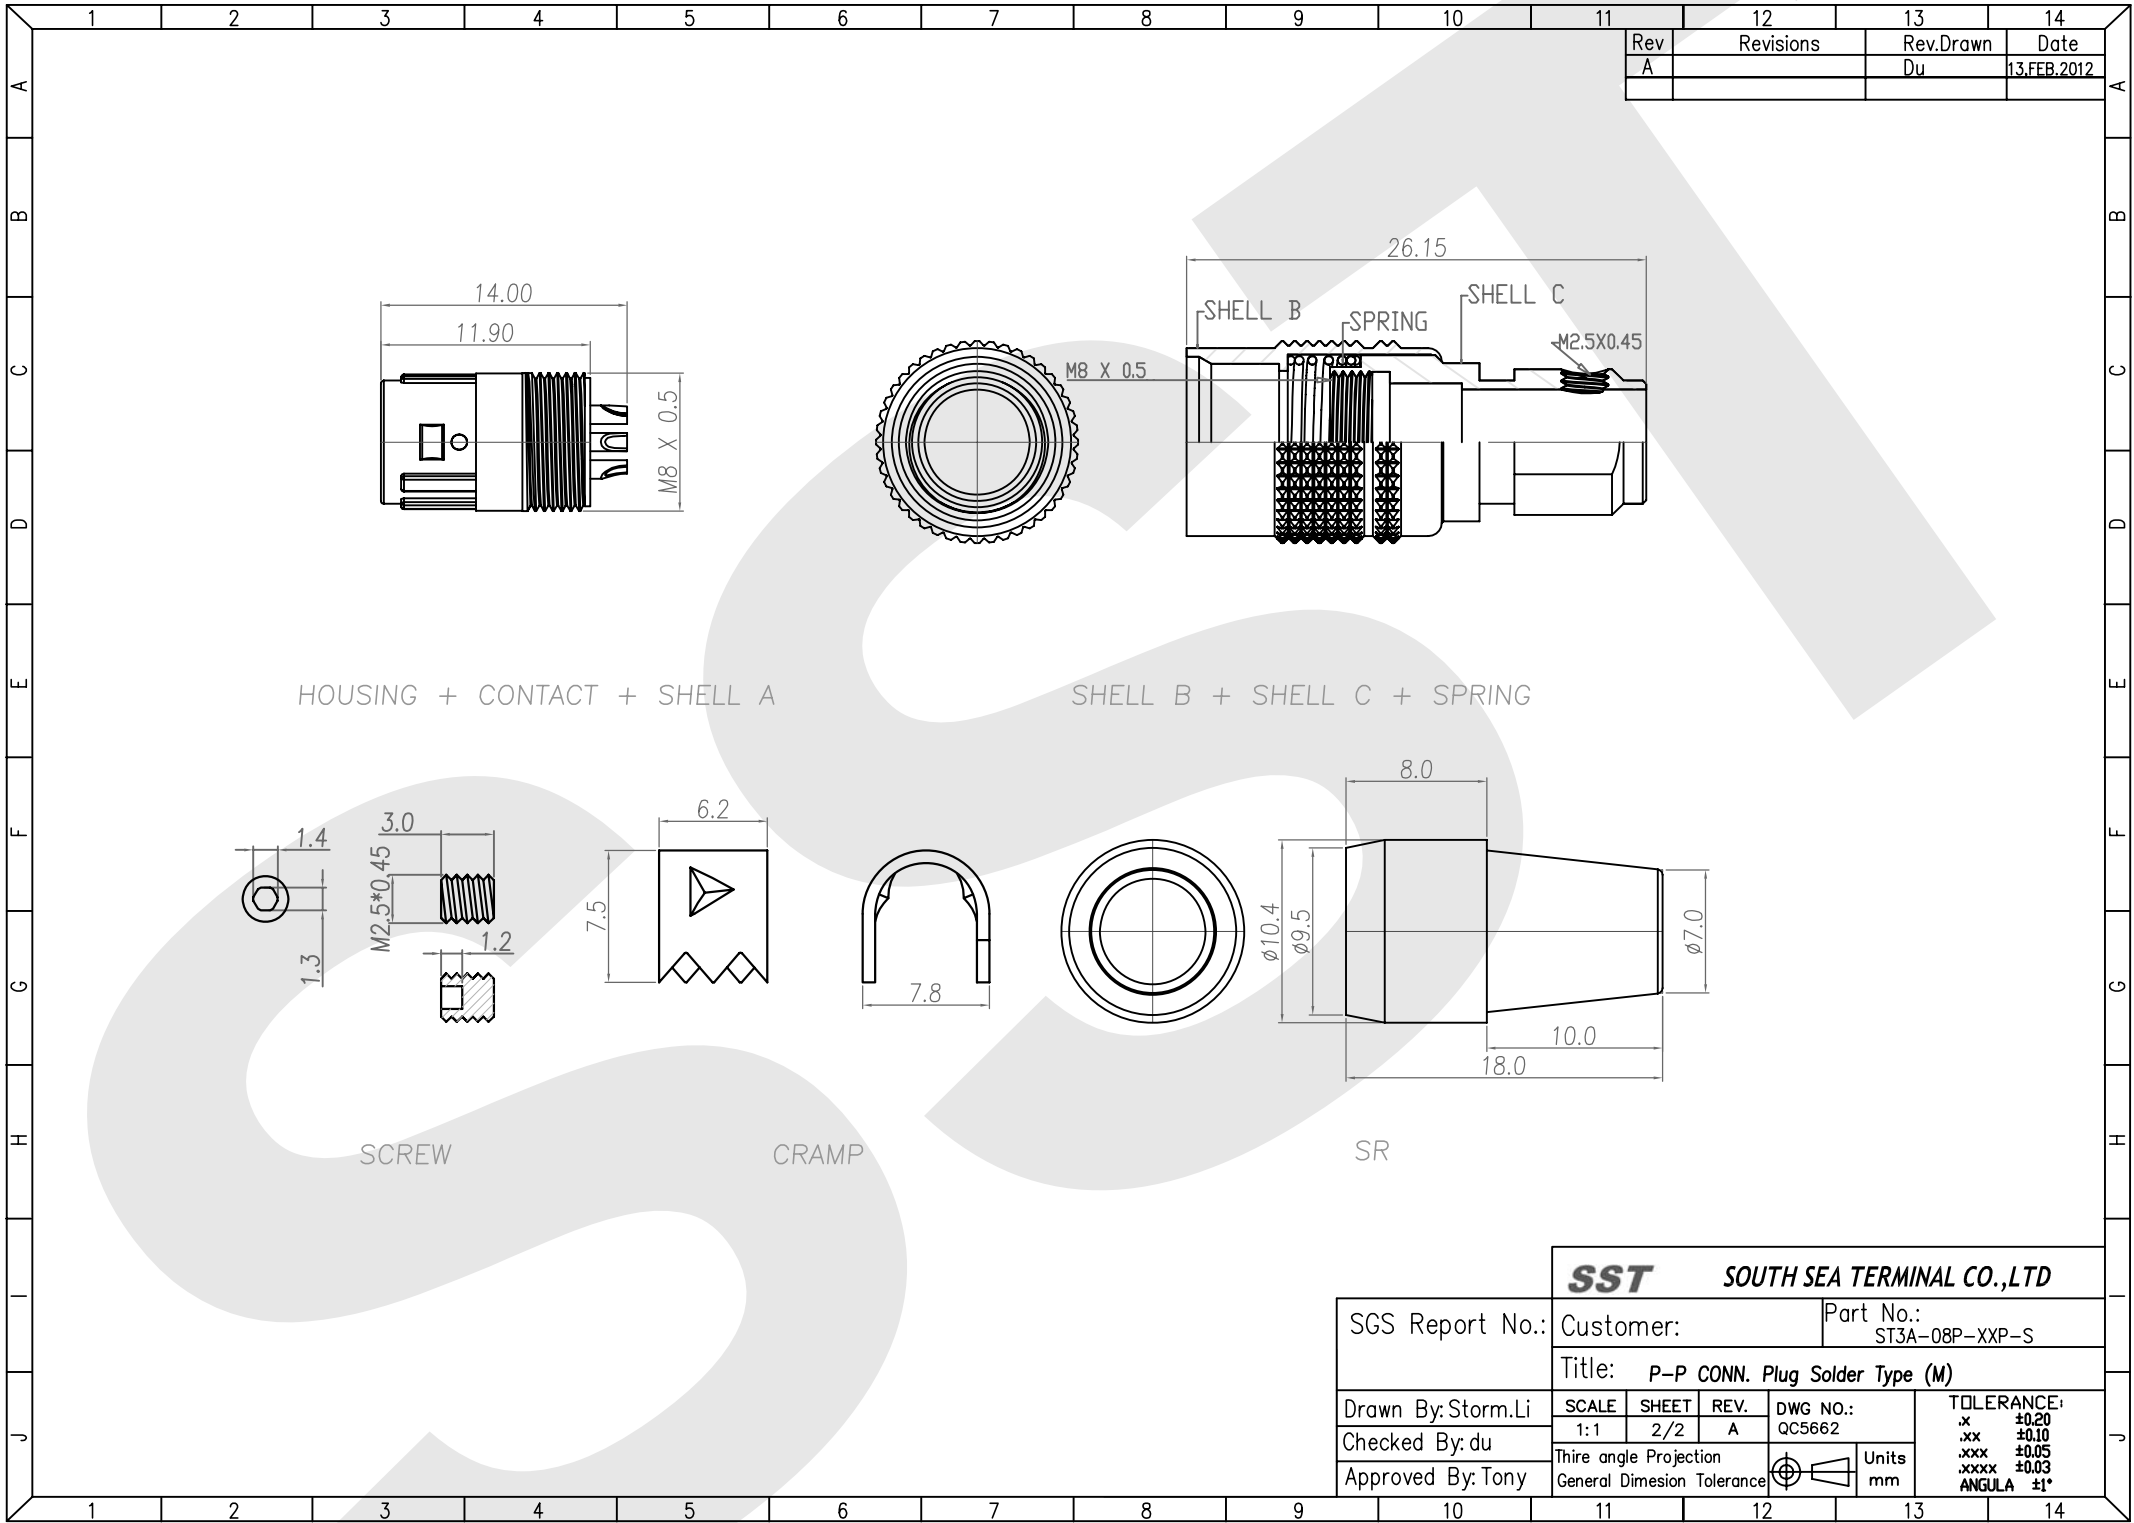


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST		SOUTH SEA TERMINAL CO.,LTD	
SGS Report No.:		Customer:	Part No.: ST3A-08P-XXP-S
Title: P-P CONN. Plug Solder Type (M)			
Drawn By:Storm.Li	SCALE 1:1	SHEET 2/2	REV. A
Checked By:du	DWG NO.: QC5662		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Approved By: Tony	Thire angle Projection General Dimesion Tolerance		Units mm

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08P-04P-S	ST3A-08P-05P-S	ST3A-08P-06P-S	ST3A-08P-07P-S

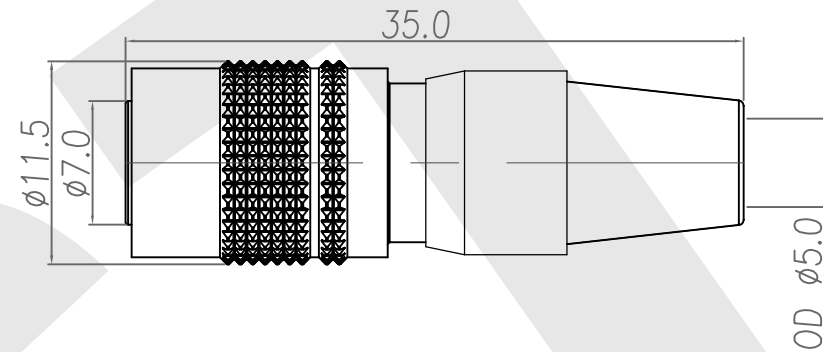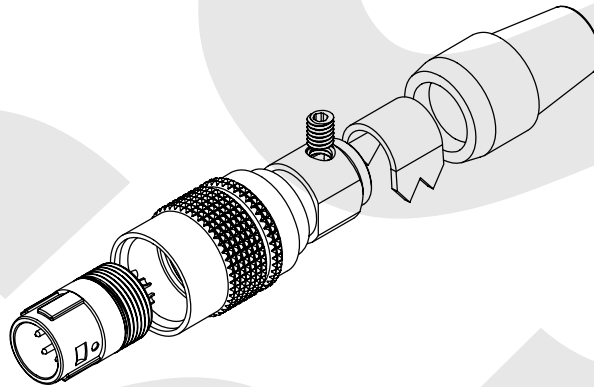

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SPRING : STAINLESS STEEL
- 1-7. SCREW : ALLOY STEEL
- 1-8. CLAMP : BRASS
- 1-9. SR : NBR ; COLOR : BLACK

2. FINISH :


- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : SATIN NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SPRING : NICKEL
- 2-6. SCREW : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08 P-XXP-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

SST SOUTH SEA TERMINAL CO.,LTD





SGS Report No.:	Customer:	Part No.:
		ST3A-08P-XXP-S
Title: P-P CONN. Plug Solder Type (M)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/2
Approved By: Tony	REV. A	DWG NO.: QC5662
Third angle Projection		Units mm
General Dimension Tolerance		TOLERANCE:
		.x ±0.20
		.xx ±0.10
		.xxx ±0.05
		.xxxx ±0.03
		ANGULA ±1°


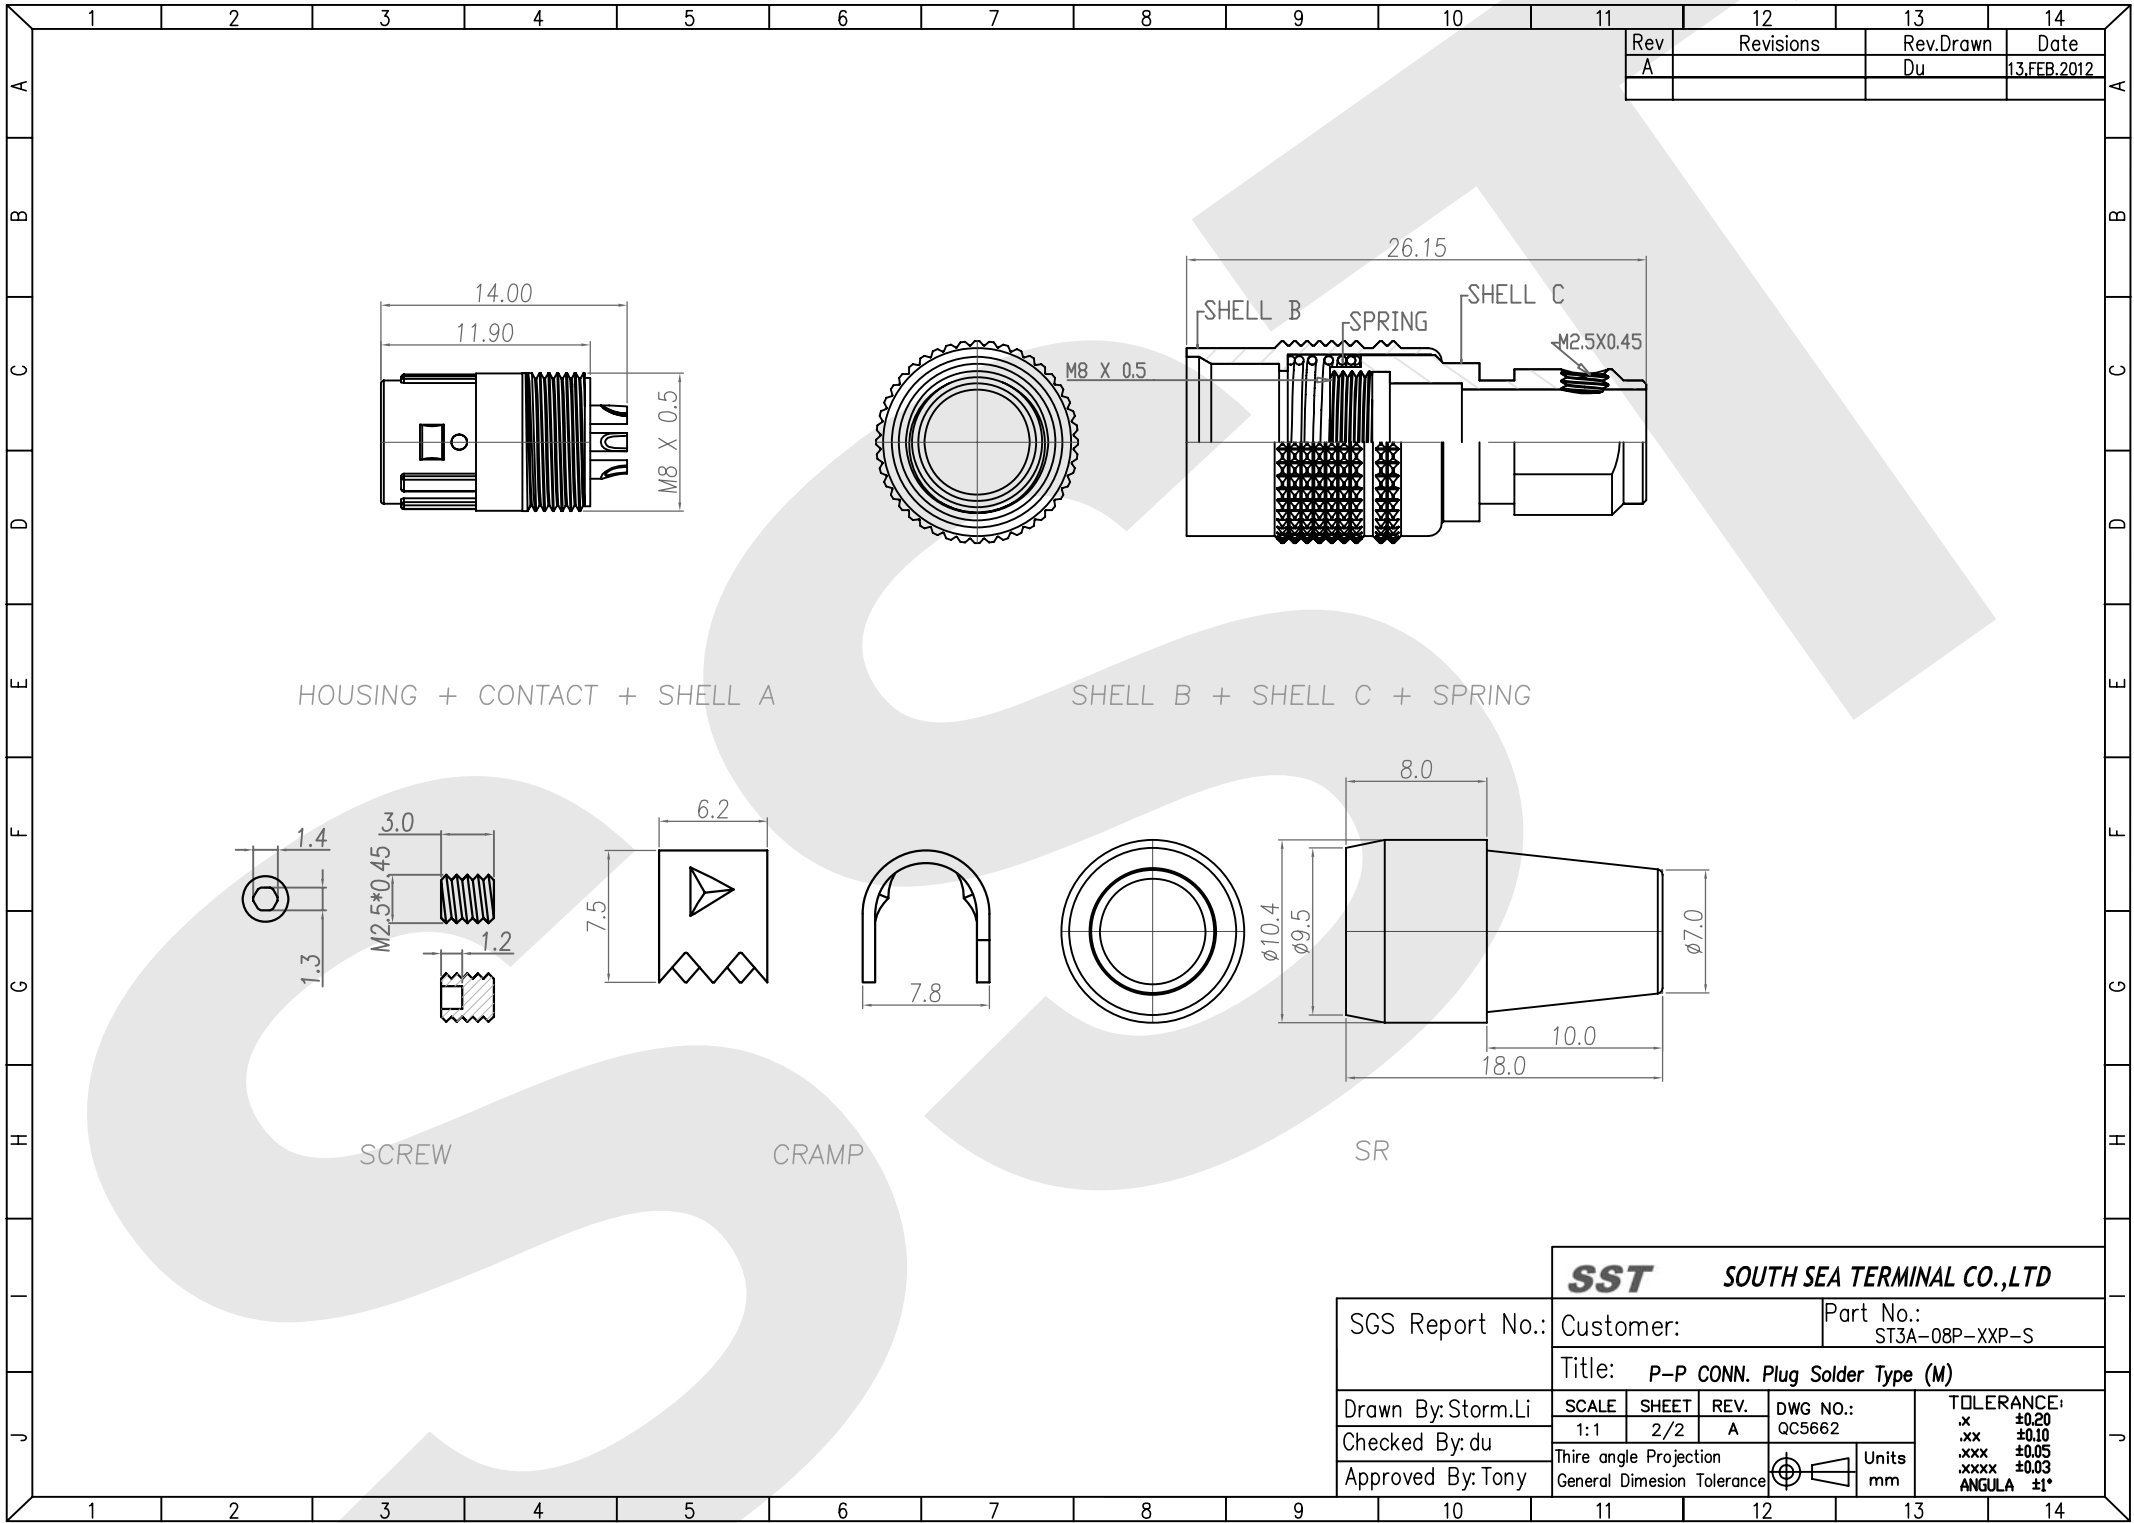


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST		SOUTH SEA TERMINAL CO.,LTD	
Customer:		Part No.: ST3A-08P-XXP-S	
Title: P-P CONN. Plug Solder Type (M)			
SCALE 1:1	SHEET 2/2	REV. A	DWG NO.: QC5662
Third angle Projection General Dimension Tolerance			Units mm
		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08P-04P-S	ST3A-08P-05P-S	ST3A-08P-06P-S	ST3A-08P-07P-S

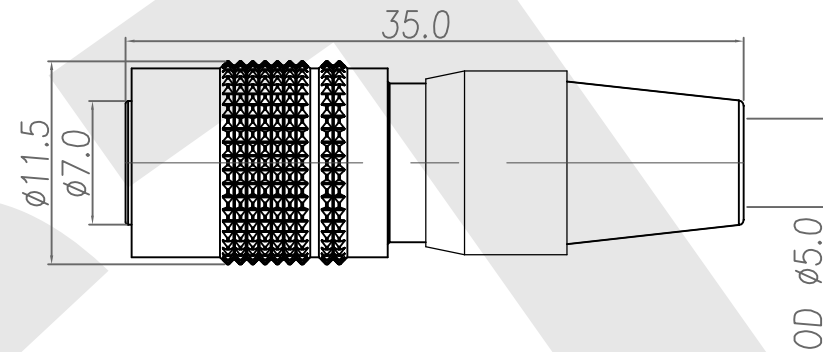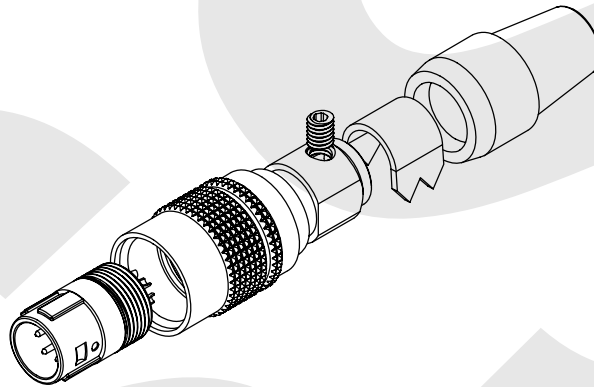

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SPRING : STAINLESS STEEL
- 1-7. SCREW : ALLOY STEEL
- 1-8. CLAMP : BRASS
- 1-9. SR : NBR ; COLOR : BLACK

2. FINISH :


- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : SATIN NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SPRING : NICKEL
- 2-6. SCREW : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08 P-XXP-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

SST SOUTH SEA TERMINAL CO.,LTD




SGS Report No.:	Customer:	Part No.:
		ST3A-08P-XXP-S
Title: P-P CONN. Plug Solder Type (M)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/2
Approved By: Tony	REV. A	DWG NO.: QC5662
Third angle Projection		Units mm
General Dimension Tolerance		TOLERANCE:
		.x ±0.20
		.xx ±0.10
		.xxx ±0.05
		.xxxx ±0.03
		ANGULA ±1°

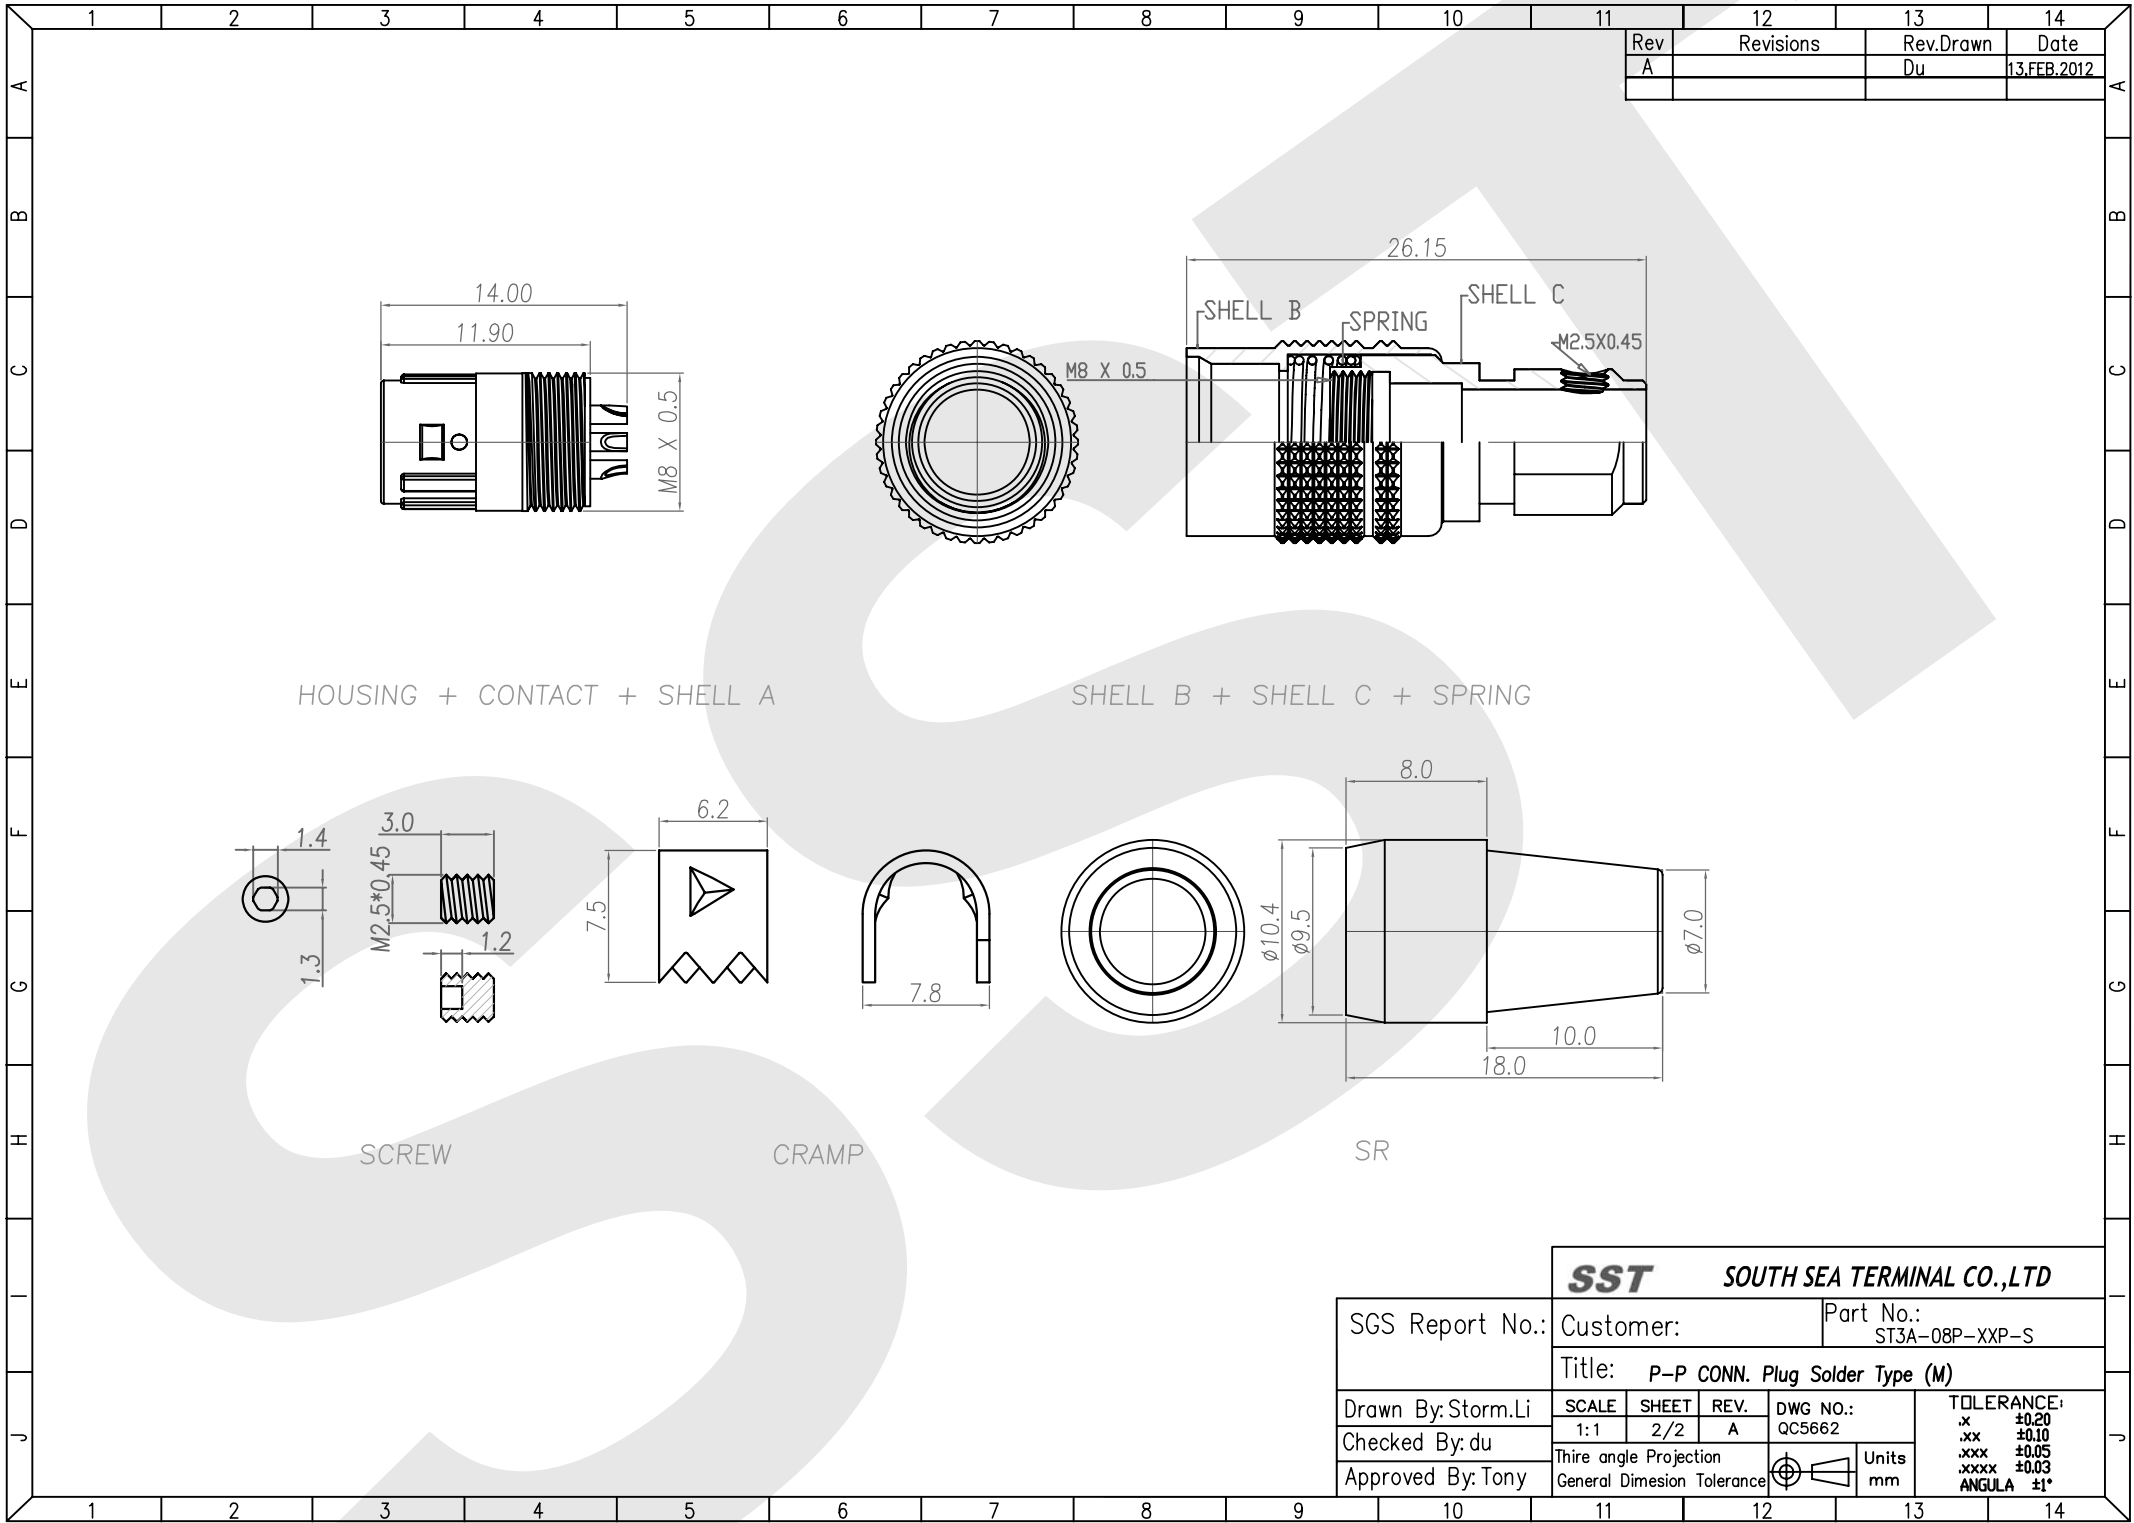


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST		SOUTH SEA TERMINAL CO.,LTD	
SGS Report No.:		Customer:	Part No.: ST3A-08P-XXP-S
Title: P-P CONN. Plug Solder Type (M)			
Drawn By:Storm.Li	SCALE 1:1	SHEET 2/2	REV. A
Checked By:du	DWG NO.: QC5662		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Approved By: Tony	Thire angle Projection General Dimesion Tolerance		Units mm

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04S-S	ST3A-08WR-05S-S	ST3A-08WR-06S-S	ST3A-08WR-07S-S

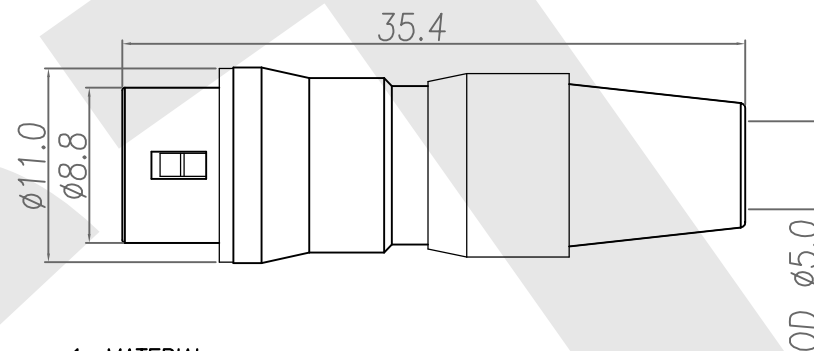

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08WR-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle




SST SOUTH SEA TERMINAL CO.,LTD							
SGS Report No.:		Customer:			Part No.: ST3A-08WR-XXS-S		
Title: P-P CONN. Wire Receptacle Solder Type (F)							
Drawn By:Storm.Li		SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By:du		1:1	1/2	A	QC5667		.x ±0.20
Approved By: Tony		Thire angle Projection				Units	.xxx ±0.05
		General Dimesion Tolerance				mm	.xxxx ±0.03
							ANGULA ±1°

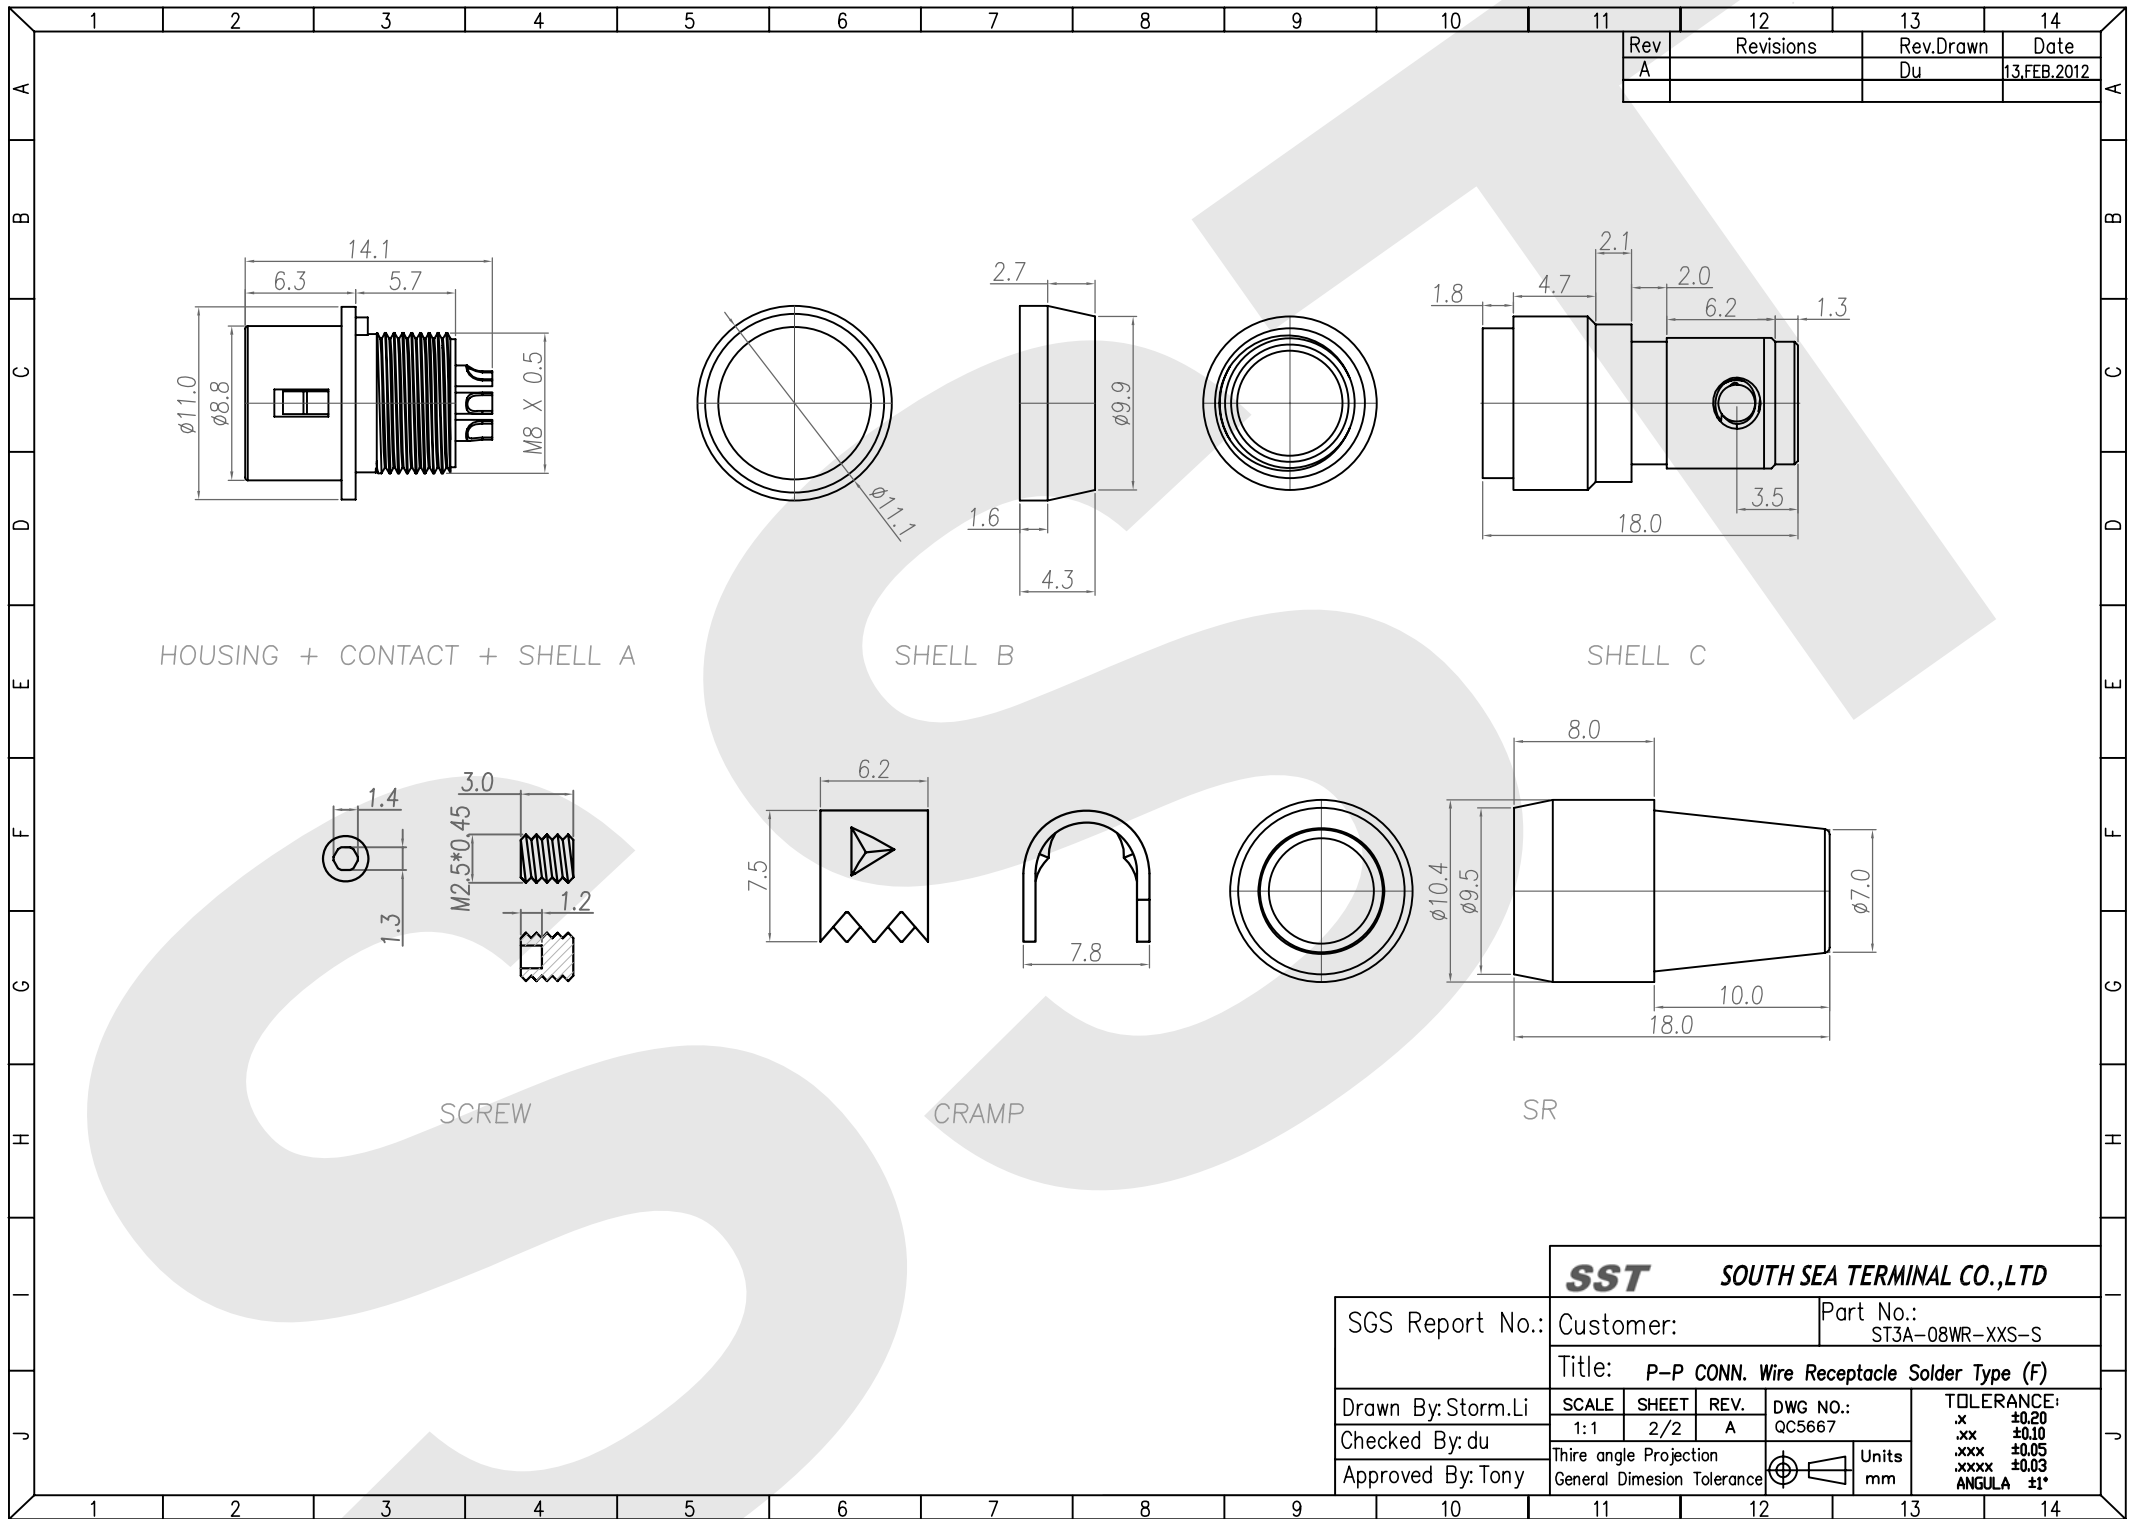


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST										SOUTH SEA TERMINAL CO.,LTD																													
SGS Report No.:										Customer:										Part No.: ST3A-08WR-XXS-S																			
										Title: <i>P-P CONN. Wire Receptacle Solder Type (F)</i>																													
Drawn By:Storm.Li										SCALE					SHEET					REV.					DWG NO.:					TOLERANCE:									
Checked By:du										1:1					2/2					A					QC5667														
Approved By: Tony										Thire angle Projection															Units mm					.x					±0.20				
										General Dimesion Tolerance																				.xxx					±0.10				
																														.xxxx					±0.05				
																														ANGULA					±1°				

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04S-S	ST3A-08WR-05S-S	ST3A-08WR-06S-S	ST3A-08WR-07S-S

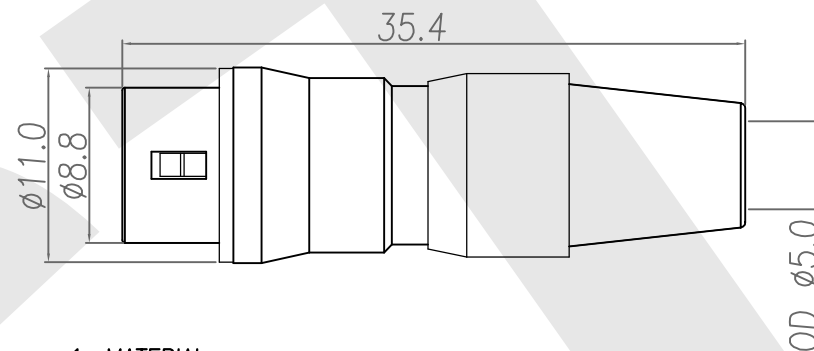

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08WR-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle




		SST				SOUTH SEA TERMINAL CO.,LTD	
SGS Report No.:		Customer:			Part No.: ST3A-08WR-XXS-S		
		Title: P-P CONN. Wire Receptacle Solder Type (F)					
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:	
Checked By:du	1:1	1/2	A	QC5667		.x ±0.20	
Approved By:Tony	Thire angle Projection				Units	.xx ±0.10	
	General Dimesion Tolerance					.xxx ±0.05	
						.xxxx ±0.03	
						ANGULA ±1°	

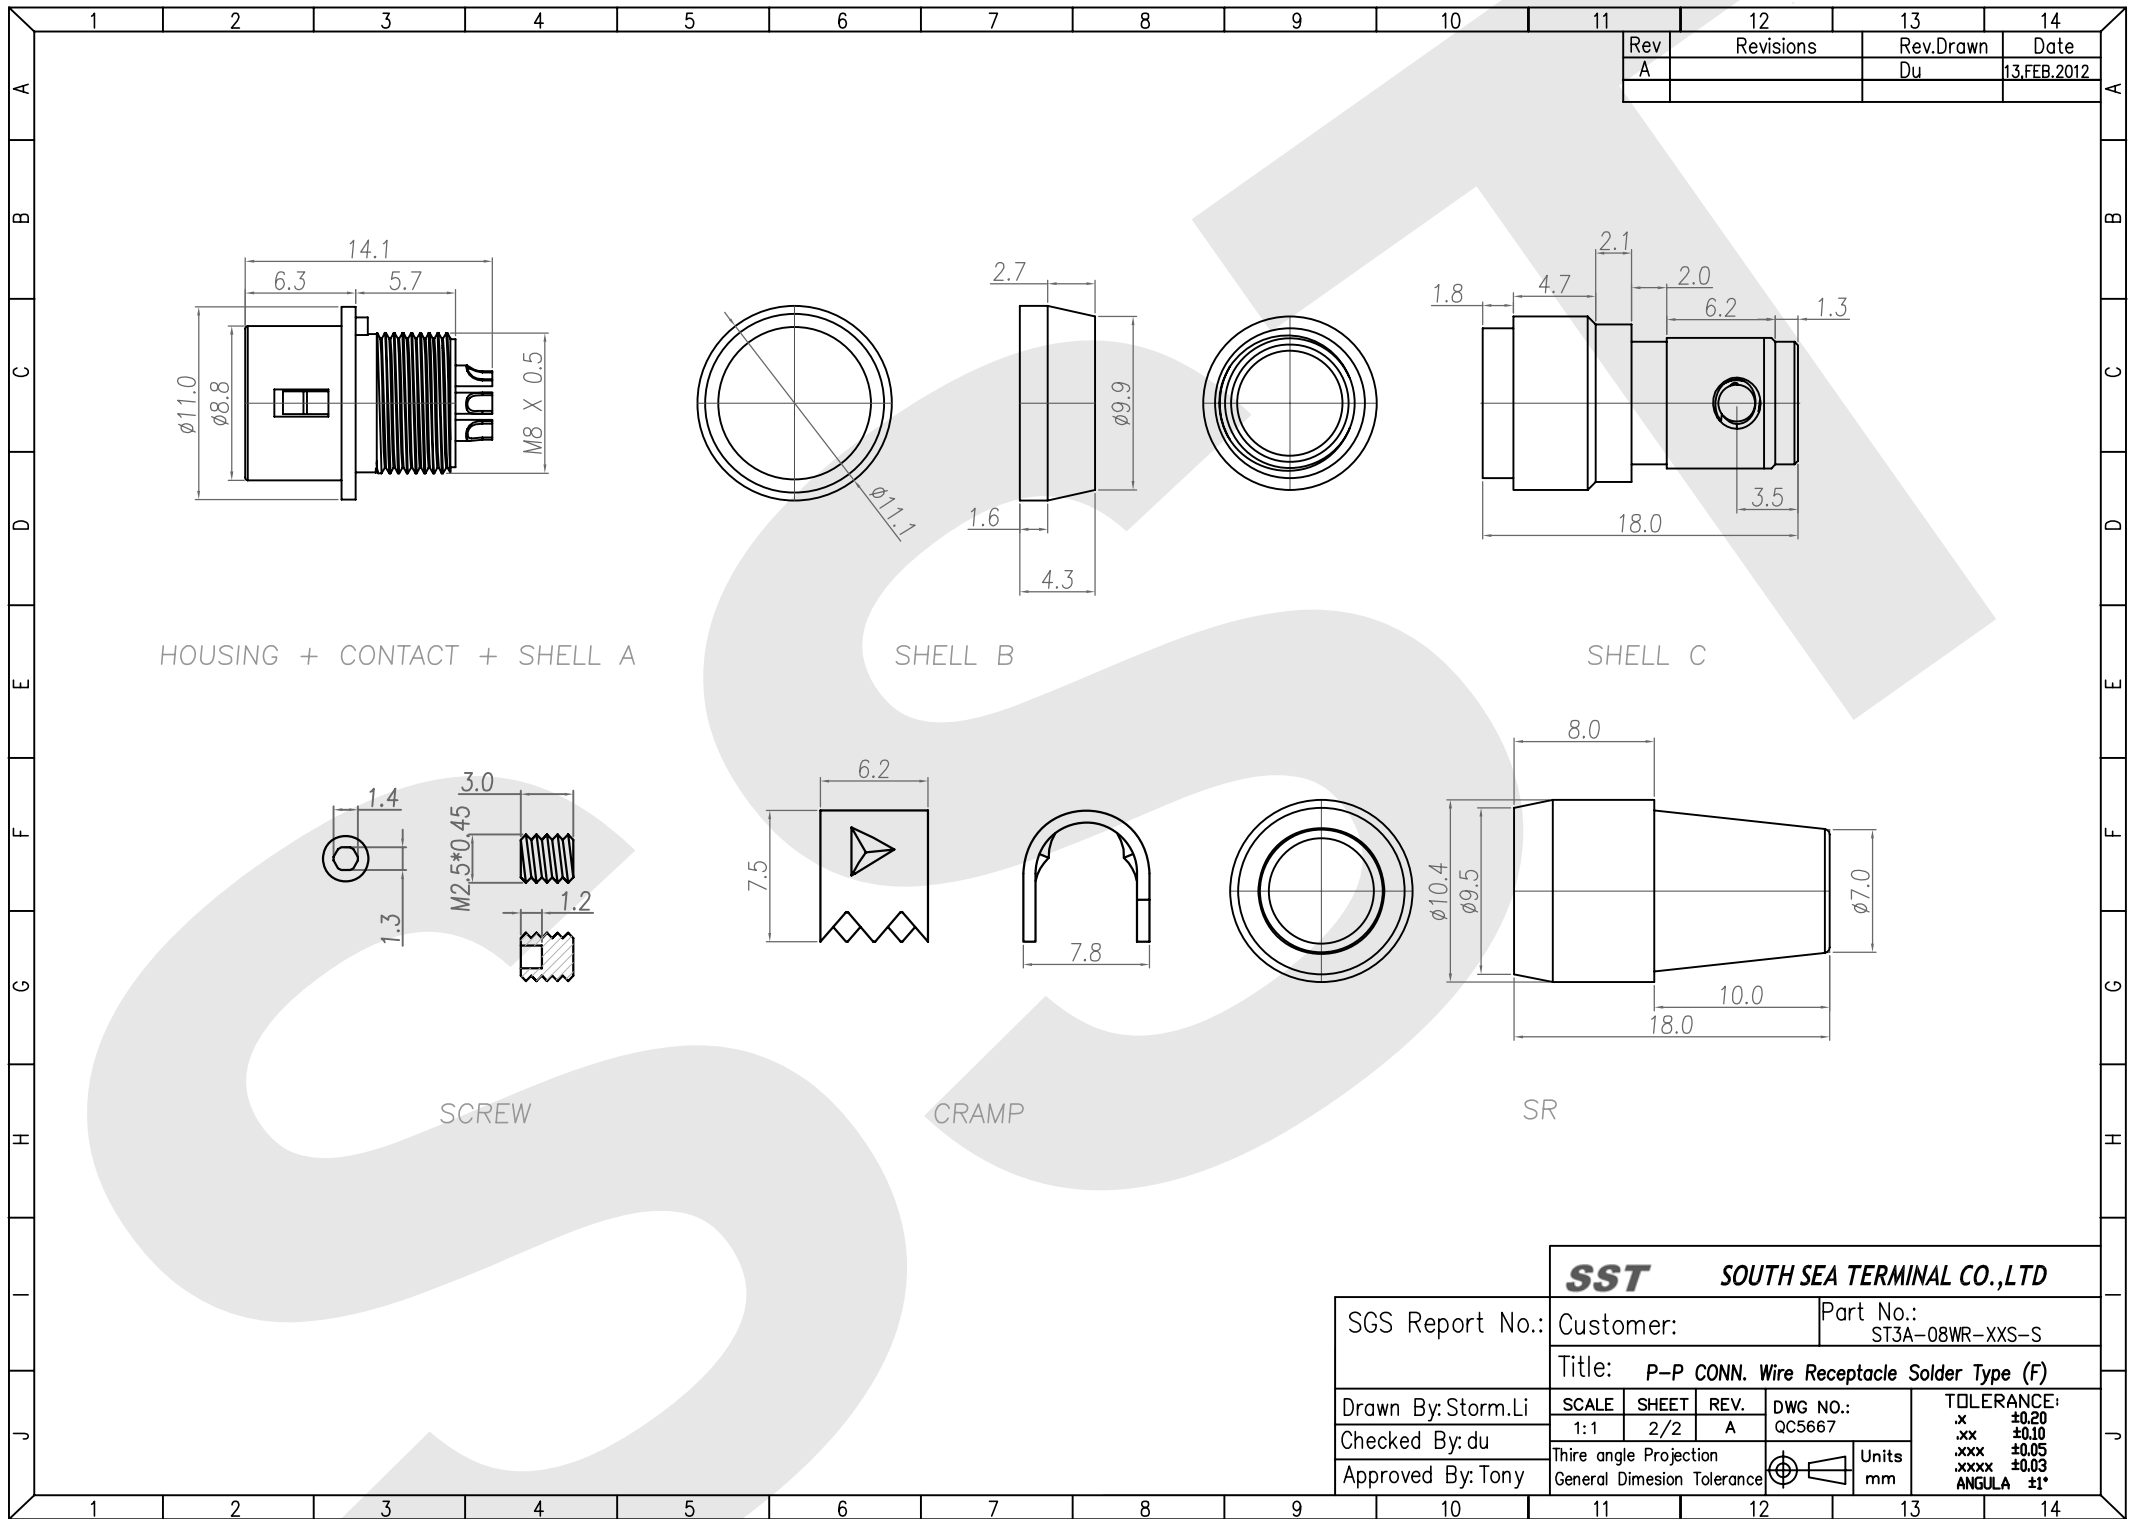


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

		SST					SOUTH SEA TERMINAL CO.,LTD				
SGS Report No.:		Customer:			Part No.: ST3A-08WR-XXS-S						
		Title: P-P CONN. Wire Receptacle Solder Type (F)									
Drawn By:Storm.Li		SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:				
Checked By:du		1:1	2/2	A	QC5667		.x ±0.20				
Approved By: Tony		Thire angle Projection					Units mm		.xxx ±0.10		
		General Dimesion Tolerance							.xxxx ±0.03		
									ANGULA ±1°		

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04S-S	ST3A-08WR-05S-S	ST3A-08WR-06S-S	ST3A-08WR-07S-S

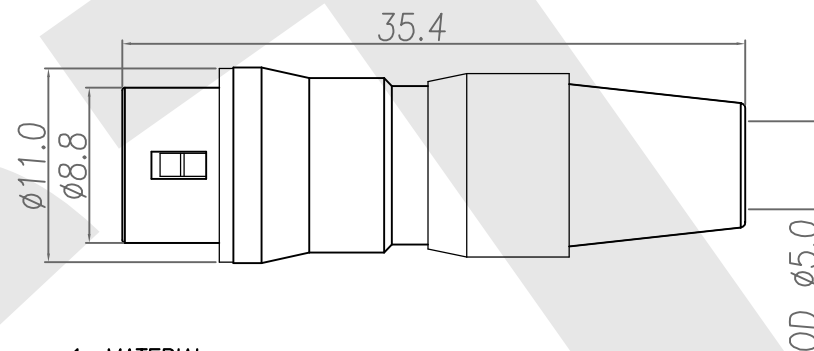

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08WR-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle




SST SOUTH SEA TERMINAL CO.,LTD							
SGS Report No.:		Customer:			Part No.: ST3A-08WR-XXS-S		
Title: P-P CONN. Wire Receptacle Solder Type (F)							
Drawn By:Storm.Li		SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By:du		1:1	1/2	A	QC5667		.x ±0.20
Approved By: Tony		Thire angle Projection					.xx ±0.10
		General Dimesion Tolerance					Units mm
							.xxxx ±0.03
							ANGULA ±1°

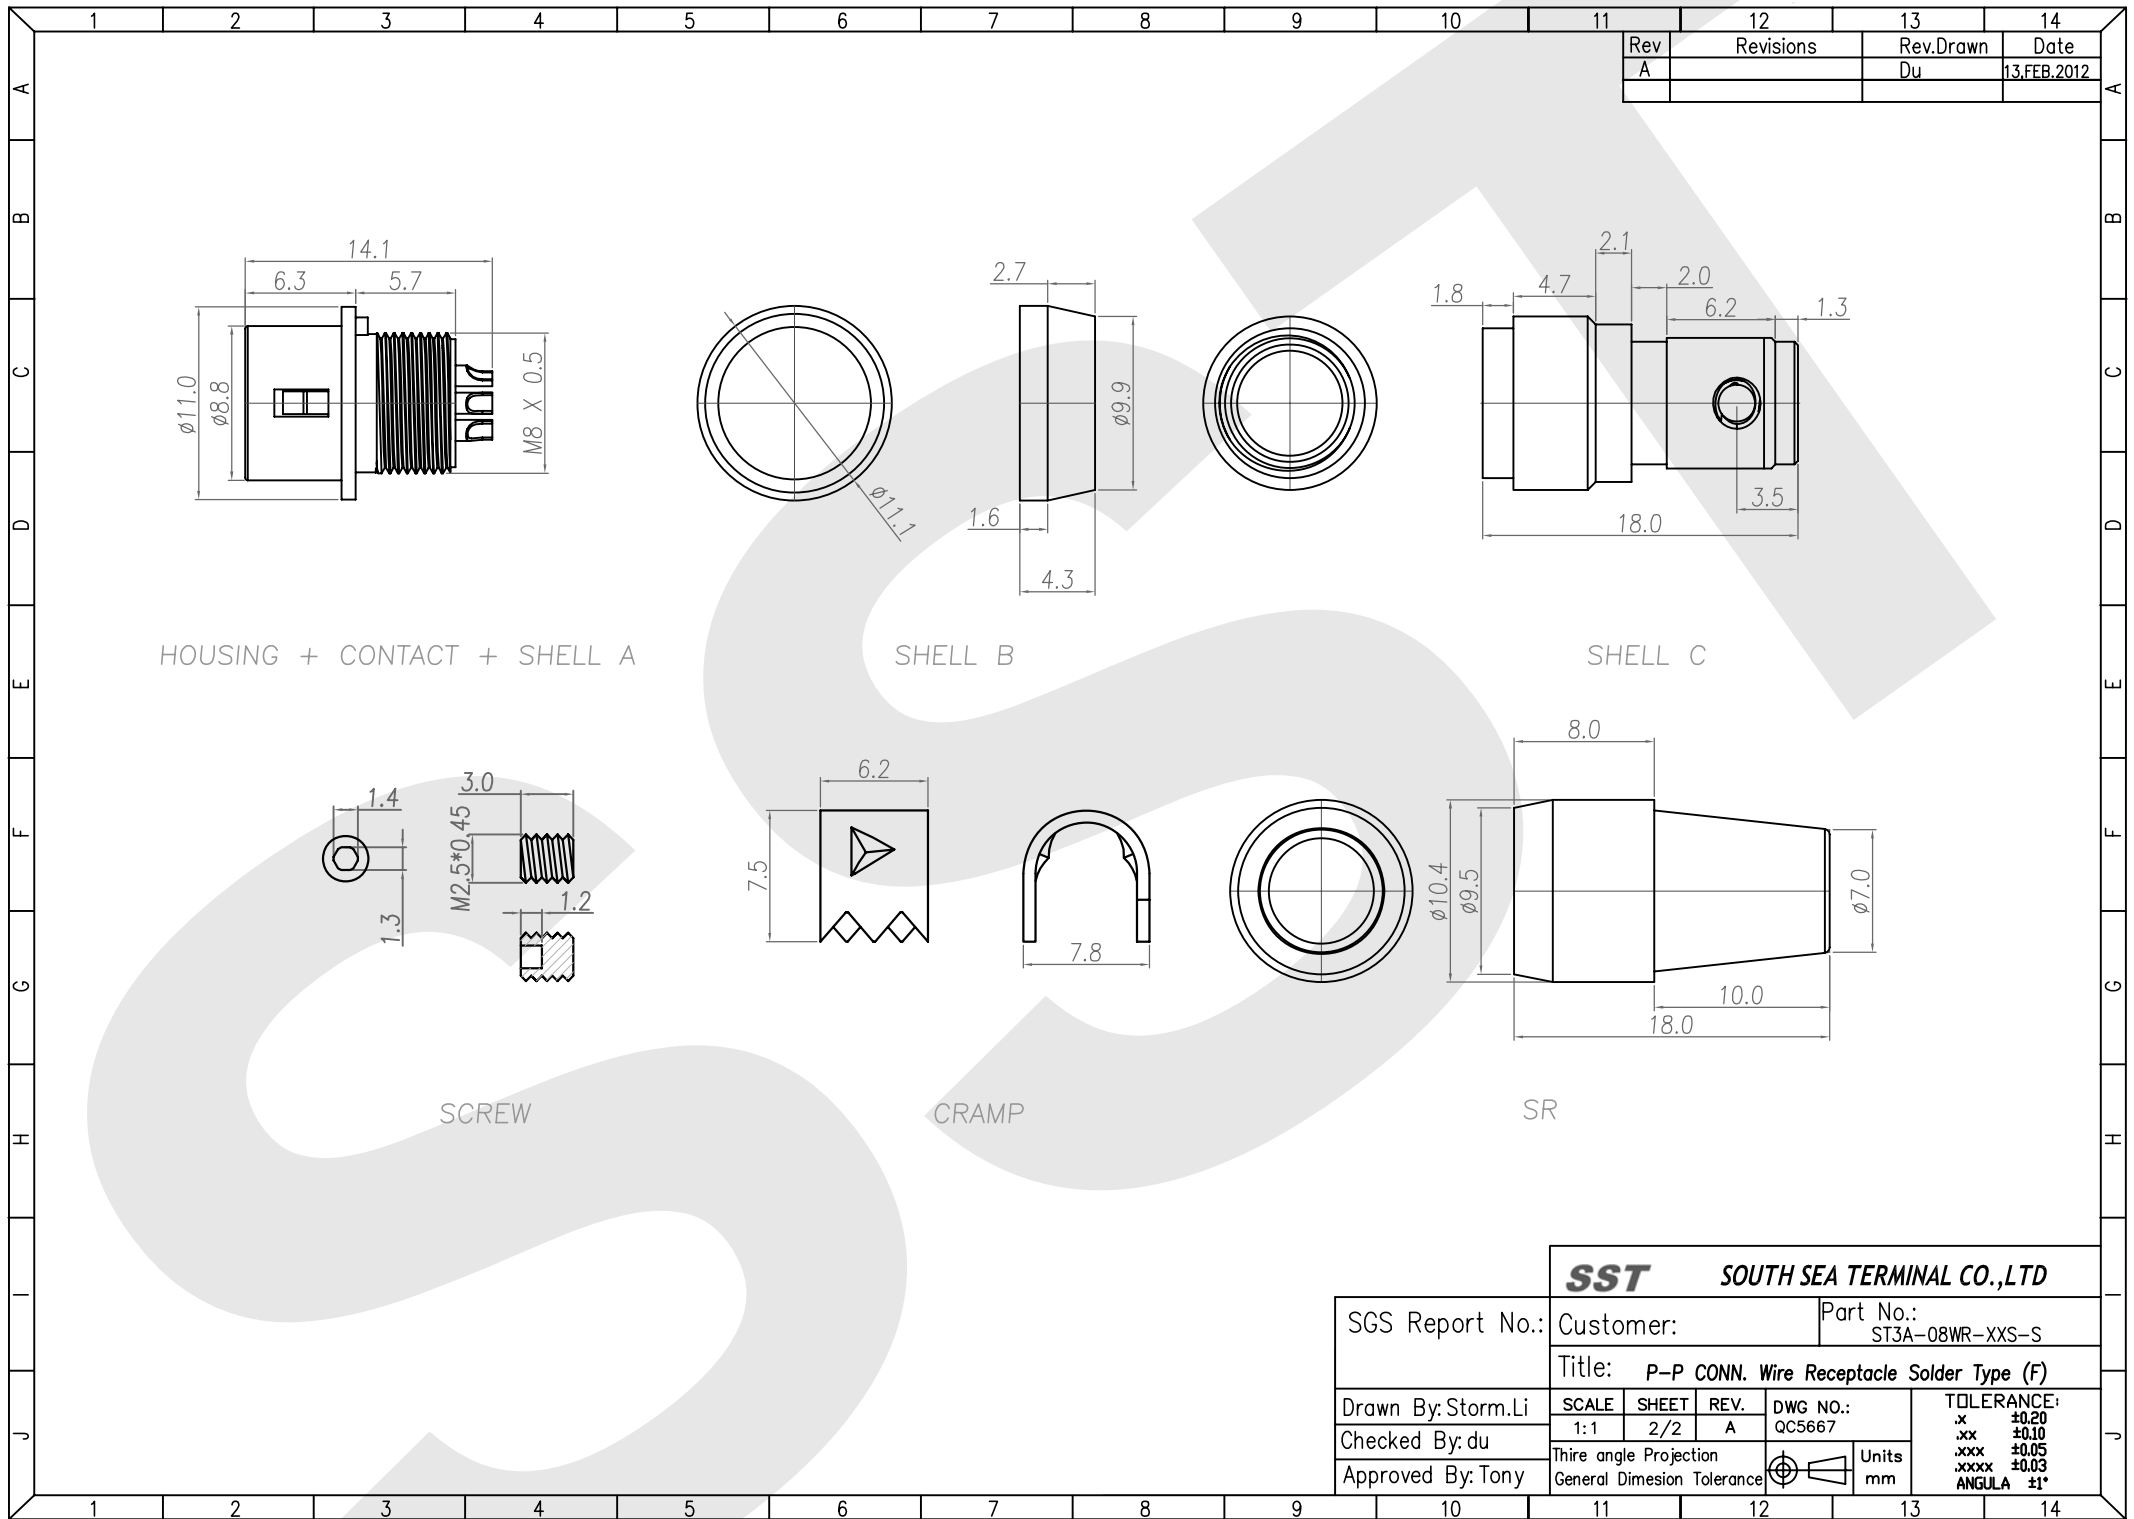


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

		SST SOUTH SEA TERMINAL CO.,LTD						
SGS Report No.:	Customer:			Part No.:				
				ST3A-08WR-XXS-S				
Title: P-P CONN. Wire Receptacle Solder Type (F)								
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:		
Checked By:du	1:1	2/2	A	QC5667				
Approved By: Tony	Thire angle Projection				Units	.x ±0.20		
	General Dimesion Tolerance					.xxx ±0.10		
.xxxx ±0.03								
ANGULA ±1°								

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04S-S	ST3A-08WR-05S-S	ST3A-08WR-06S-S	ST3A-08WR-07S-S

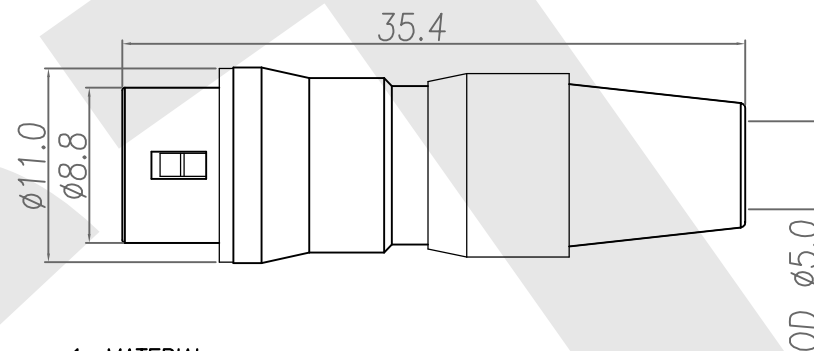

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08WR-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle





SST SOUTH SEA TERMINAL CO.,LTD						
SGS Report No.:	Customer:			Part No.: ST3A-08WR-XXS-S		
	Title: P-P CONN. Wire Receptacle Solder Type (F)					
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Checked By:du	1:1	1/2	A	QC5667		
Approved By: Tony	Third angle Projection				Units mm	
	General Dimesion Tolerance					

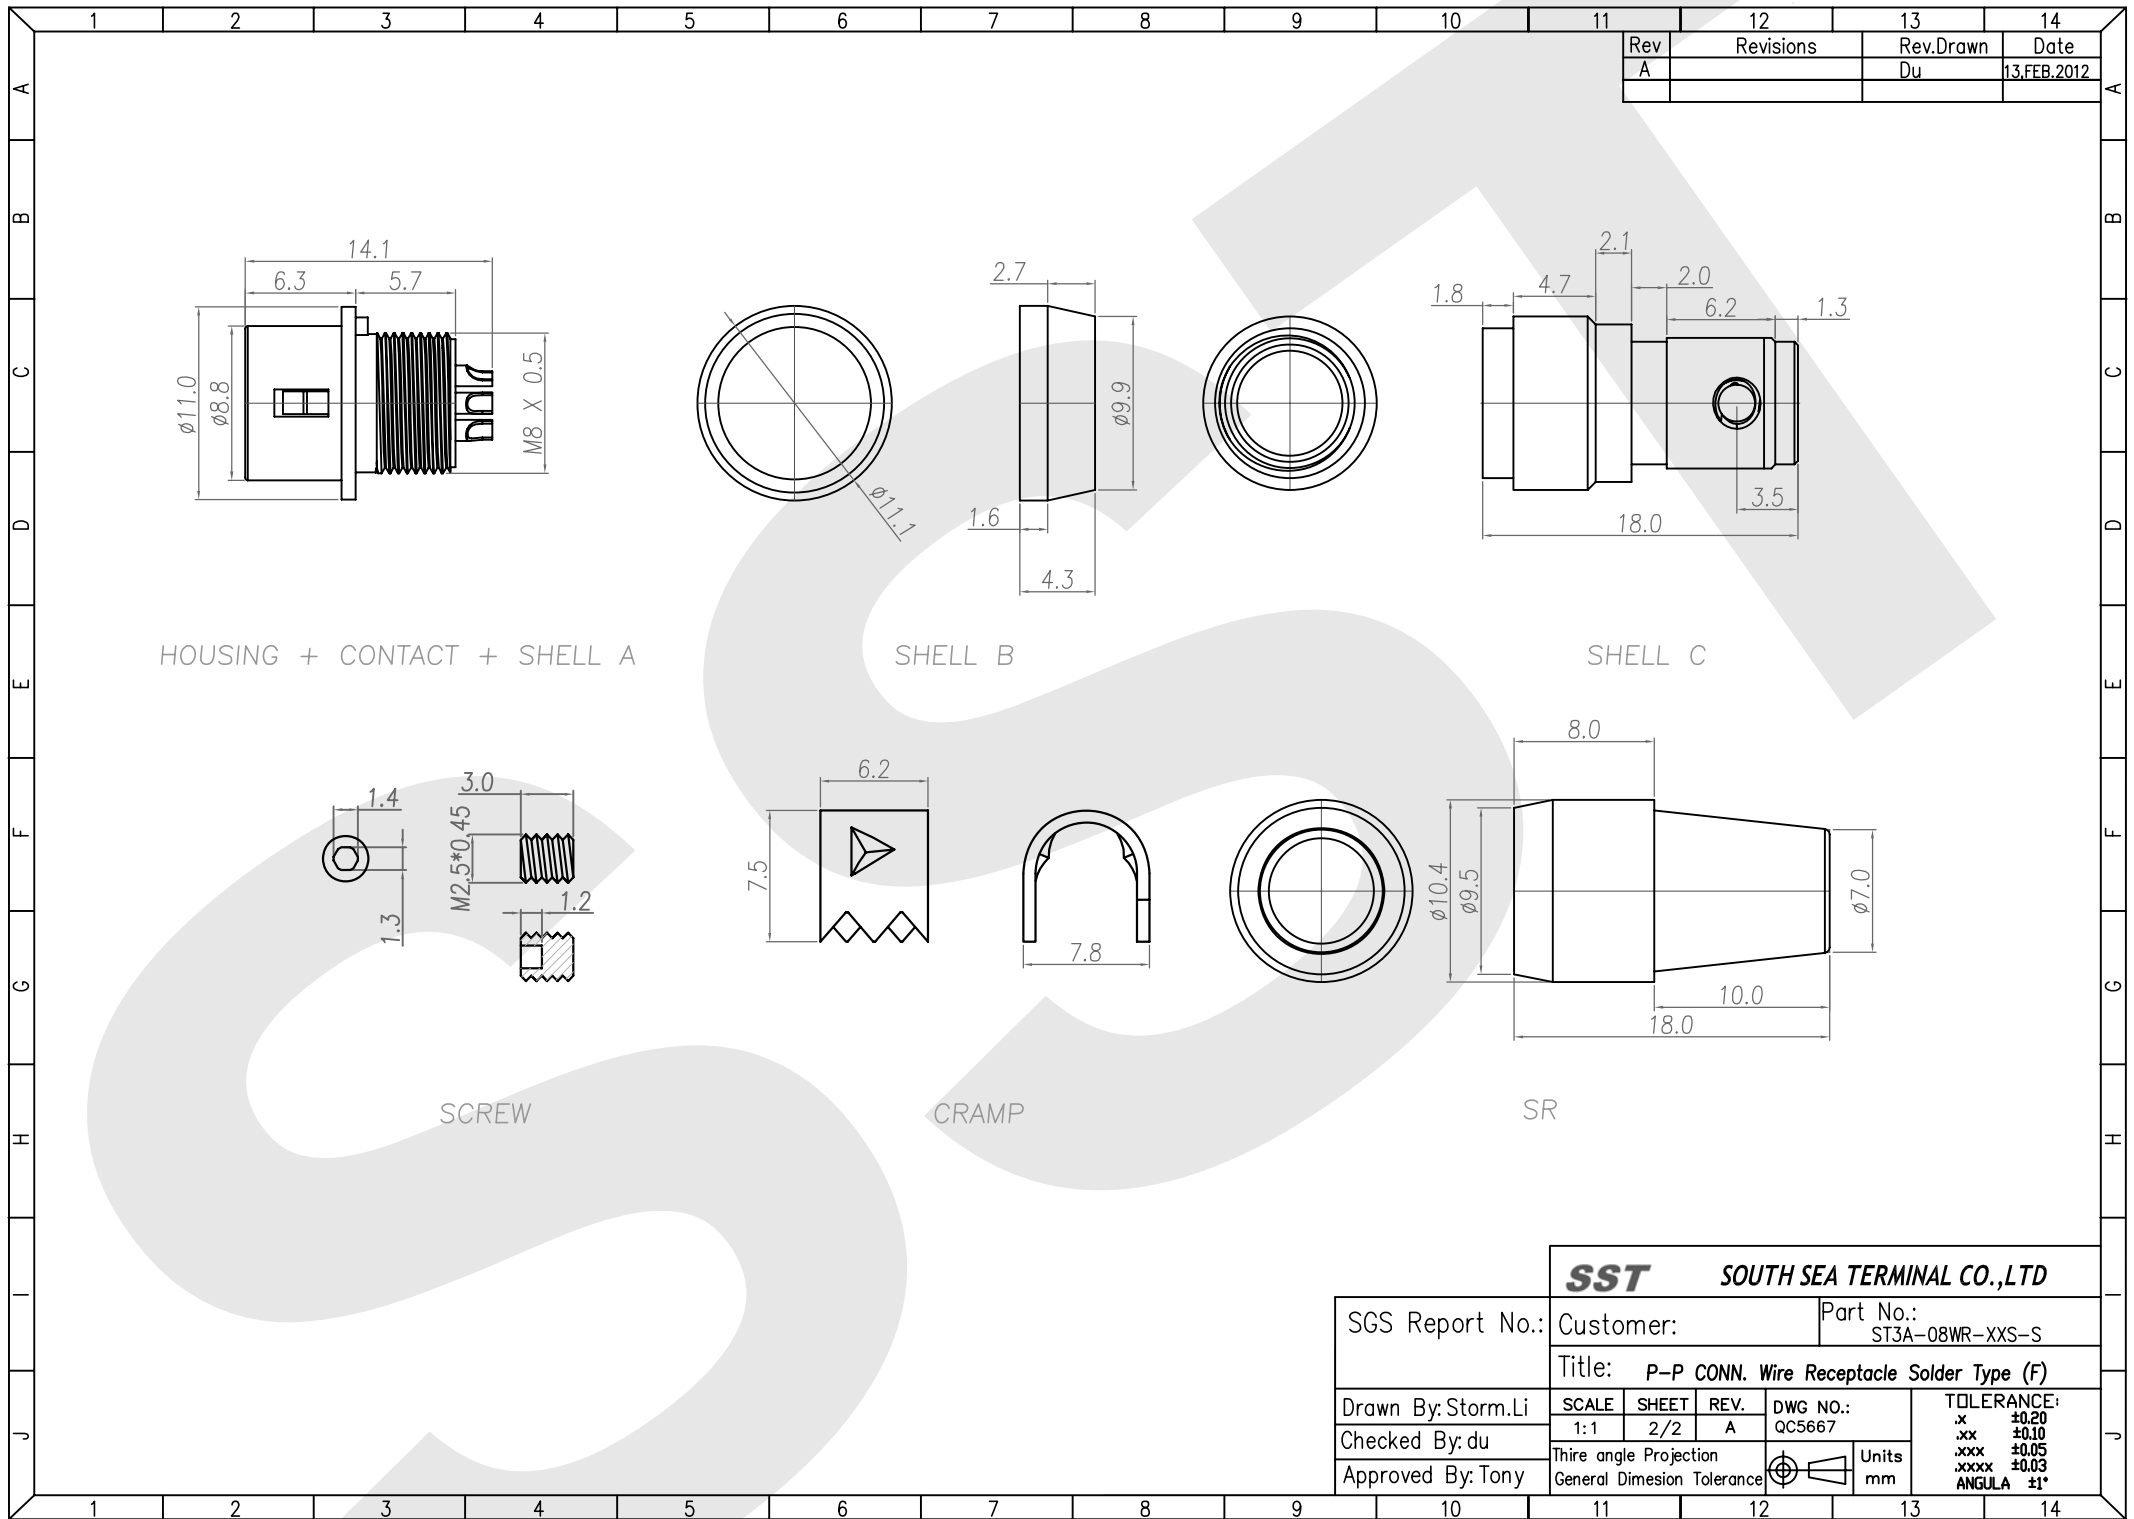


Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST										SOUTH SEA TERMINAL CO.,LTD																							
SGS Report No.:										Customer:										Part No.: ST3A-08WR-XXS-S													
										Title: P-P CONN. Wire Receptacle Solder Type (F)																							
Drawn By:Storm.Li										SCALE				SHEET				REV.		DWG NO.:				TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°									
Checked By:du										1:1				2/2				A		QC5667													
Approved By: Tony										Thire angle Projection														Units mm									
										General Dimesion Tolerance																							

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04P-S	ST3A-08WR-05P-S	ST3A-08WR-06P-S	ST3A-08WR-07P-S

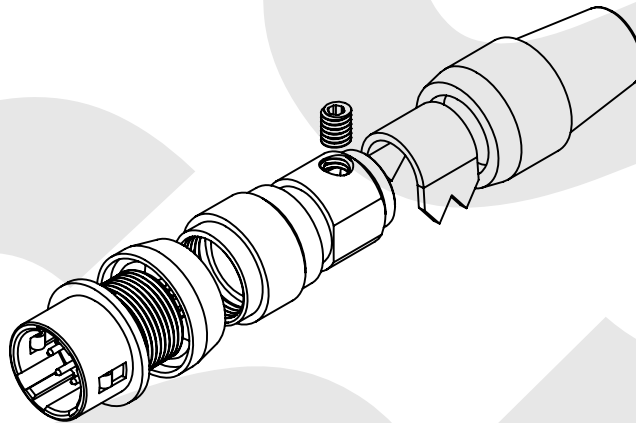


3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

ST3A-08WR-XXP-S

Series ———— D: Dip type
S: Solder type

Dimension of inner ———— P: Male contact
thread=M8 ———— S: Female contact

——— Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

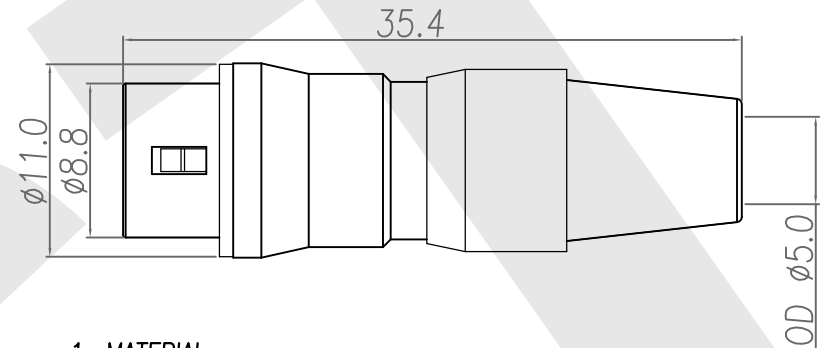


1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL


SST SOUTH SEA TERMINAL CO.,LTD						
SGS Report No.:		Customer:			Part No.:	
					ST3A-08WR-XXP-S	
Title: P-P CONN. Wire Receptacle Solder Type (M)						
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.: QC5666		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Checked By:du	1:1	1/2	A			
Approved By:Tony	Thire angle Projection				Units mm	
	General Dimension Tolerance					

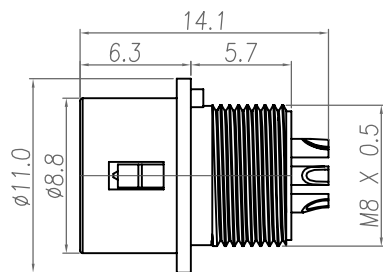


HOUSING + CONTACT + SHELL A

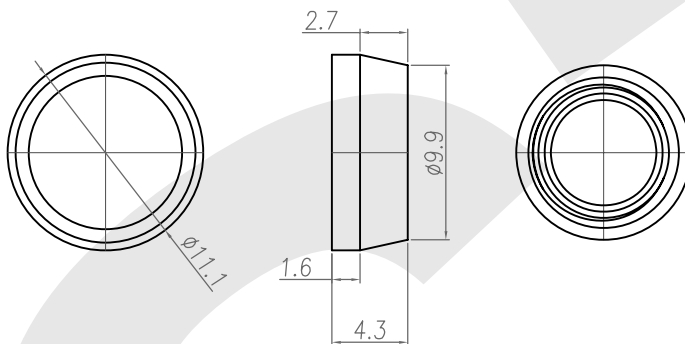


SHELL B

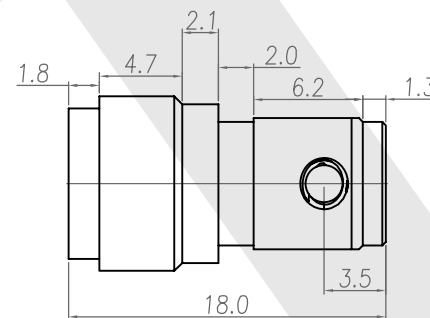


SHELL C



SCREW

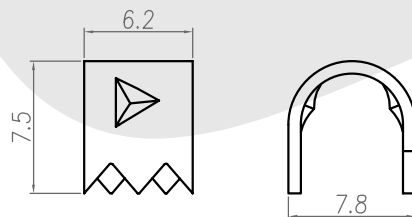

CRAMP

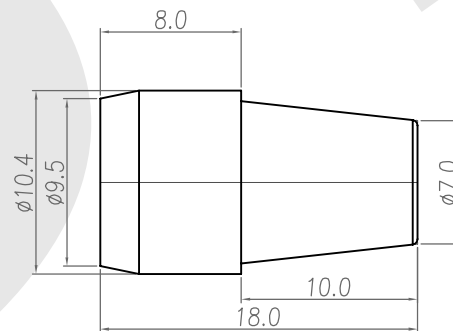





SR


SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:			Part No.: ST3A-08WR-XXP-S		
	Title: P-P CONN. Wire Receptacle Solder Type (M)					
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By: du	1:1	2/2	A	QC5666		.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03
Approved By: Tony	Thire angle Projection			Units	mm	ANGULA ±1°
	General Dimesion Tolerance					

.x ±0.20
 .xx ±0.10
 .xxx ±0.05
 .xxxx ±0.03
 ANGULA ±1°

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04P-S	ST3A-08WR-05P-S	ST3A-08WR-06P-S	ST3A-08WR-07P-S

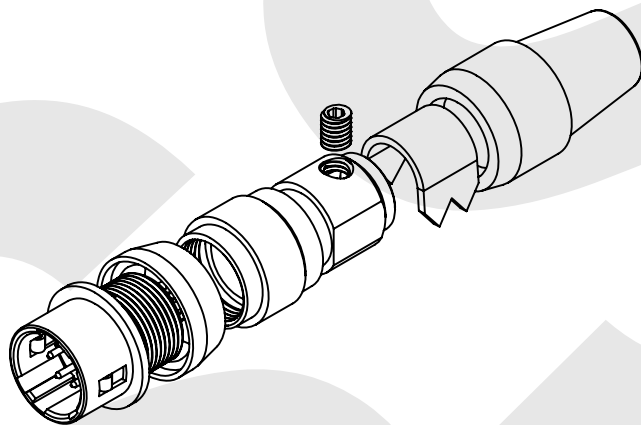


3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

ST3A-08WR-XXP-S

Series ———— D: Dip type
S: Solder type

Dimension of inner ———— P: Male contact
thread=M8 ———— S: Female contact

——— Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

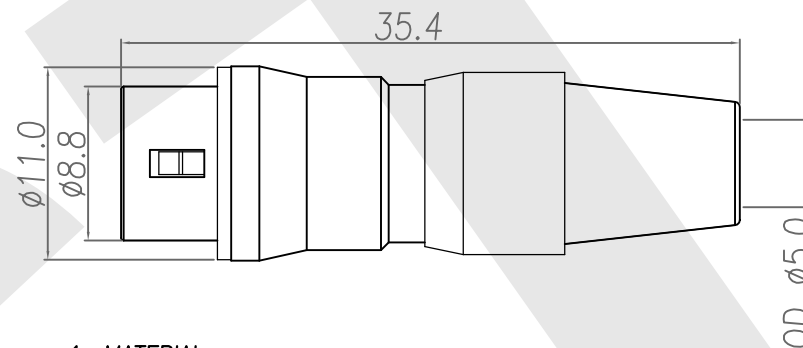


1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL


		SST SOUTH SEA TERMINAL CO.,LTD				
SGS Report No.:	Customer:			Part No.: ST3A-08WR-XXP-S		
	Title: P-P CONN. Wire Receptacle Solder Type (M)					
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By:du	1:1	1/2	A	QC5666		.x ±0.20 .xx ±0.10 .xxx ±0.05 xxxx ±0.03
Approved By: Tony	Thire angle Projection				Units mm	ANGULA ±1°
	General Dimension Tolerance					

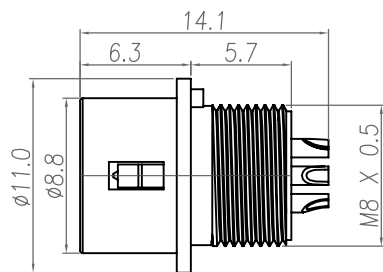


HOUSING + CONTACT + SHELL A

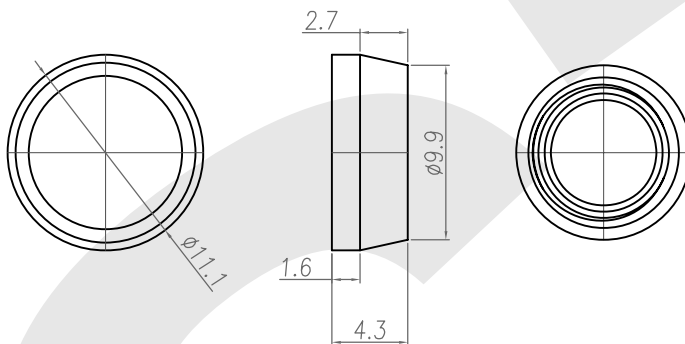


SHELL B

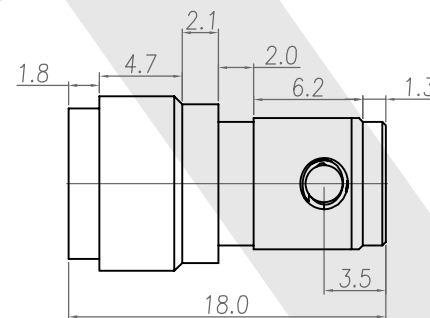


SHELL C



SCREW

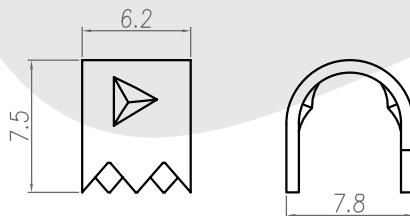

CRAMP




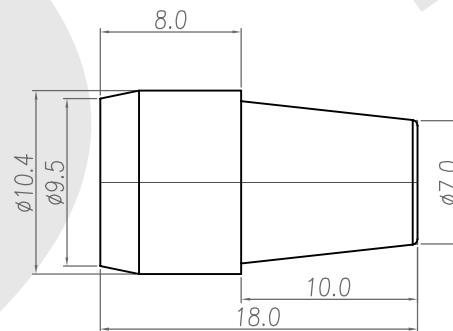



SR

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:			Part No.: ST3A-08WR-XXP-S		
	Title: P-P CONN. Wire Receptacle Solder Type (M)					
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By: du	1:1	2/2	A	QC5666		.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Approved By: Tony	Thire angle Projection				Units mm	
	General Dimesion Tolerance					

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04P-S	ST3A-08WR-05P-S	ST3A-08WR-06P-S	ST3A-08WR-07P-S

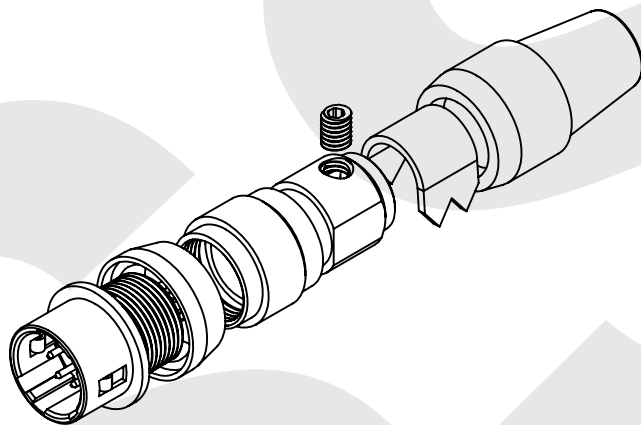


3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

ST3A-08WR-XXP-S

Series ———— D: Dip type
S: Solder type

Dimension of inner ———— P: Male contact
thread=M8 ———— S: Female contact

——— Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

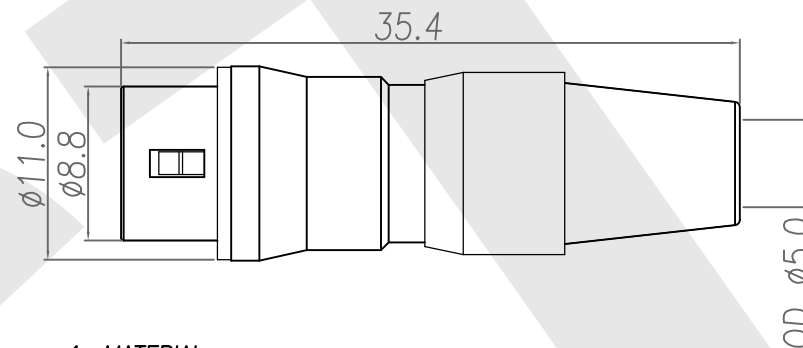


1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL


		SST SOUTH SEA TERMINAL CO.,LTD				
SGS Report No.:	Customer:			Part No.: ST3A-08WR-XXP-S		
	Title: P-P CONN. Wire Receptacle Solder Type (M)					
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By:du	1:1	1/2	A	QC5666		.x ±0.20 .xx ±0.10 .xxx ±0.05 xxxx ±0.03 ANGULA ±1°
Approved By: Tony	Thire angle Projection				Units mm	
	General Dimension Tolerance					

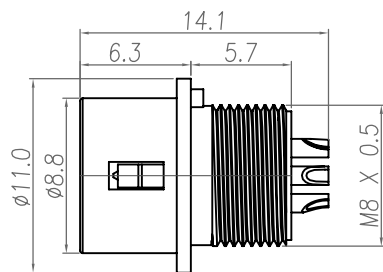


HOUSING + CONTACT + SHELL A

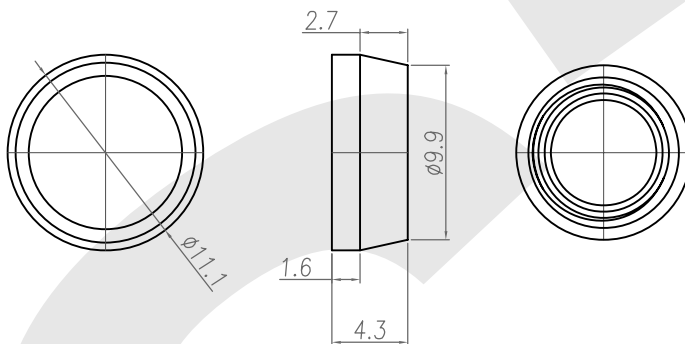


SHELL B

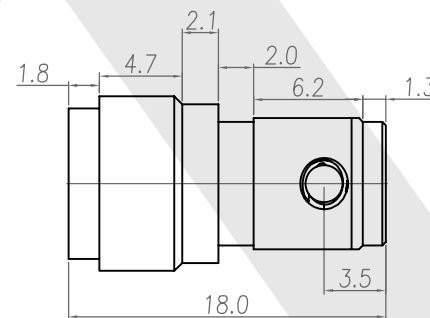


SHELL C



SCREW

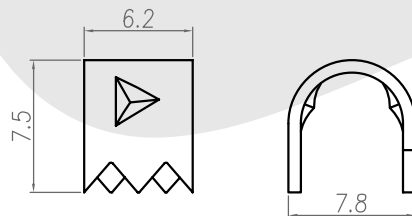

CRAMP

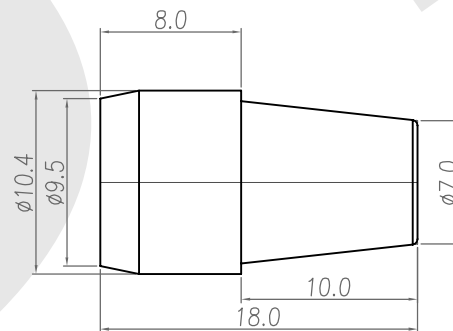





SR


SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:			Part No.: ST3A-08WR-XXP-S		
	Title: P-P CONN. Wire Receptacle Solder Type (M)					
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By: du	1:1	2/2	A	QC5666		.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULAR ±1°
Approved By: Tony	Thire angle Projection				Units mm	
	General Dimesion Tolerance					

.x ±0.20
 .xx ±0.10
 .xxx ±0.05
 .xxxx ±0.03
 ANGULA ±1°

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04P-S	ST3A-08WR-05P-S	ST3A-08WR-06P-S	ST3A-08WR-07P-S

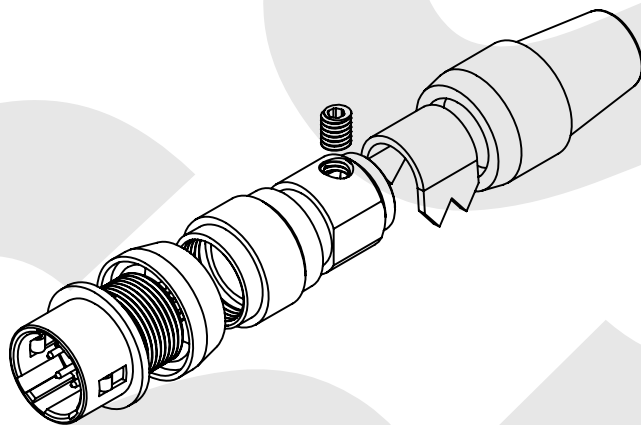


3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

ST3A-08WR-XXP-S

Series ——— D: Dip type
S: Solder type

Dimension of inner ——— P: Male contact
thread=M8 ——— S: Female contact

——— Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

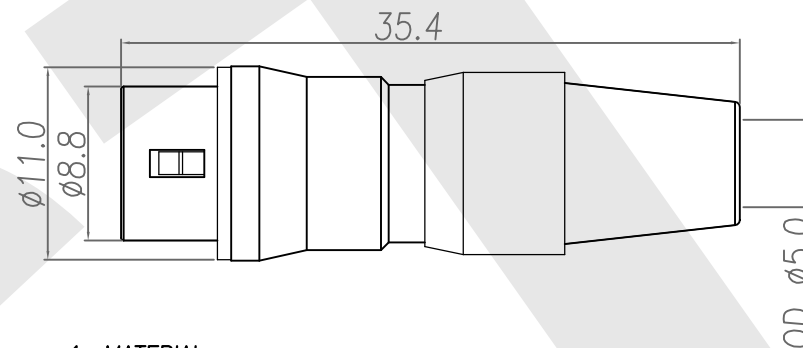


1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL


SST SOUTH SEA TERMINAL CO.,LTD						
SGS Report No.:	Customer:			Part No.: ST3A-08WR-XXP-S		
	Title: P-P CONN. Wire Receptacle Solder Type (M)					
	Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE
Checked By:du	1:1	1/2	A	QC5666		.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Approved By:Tony	Third angle Projection General Dimension Tolerance					Units mm

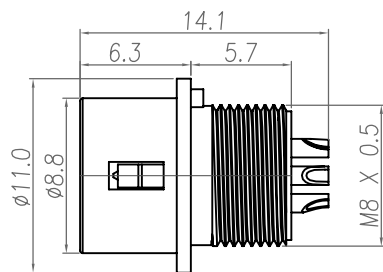


HOUSING + CONTACT + SHELL A

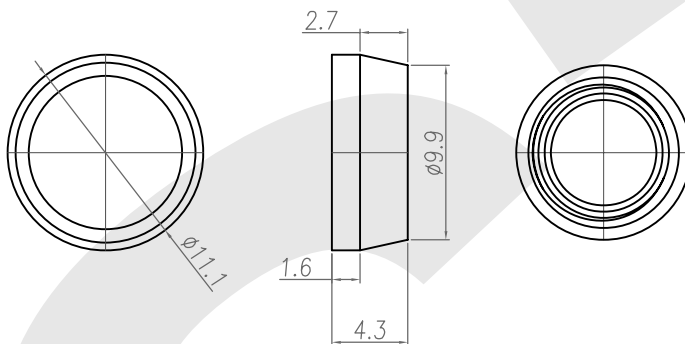


SHELL B

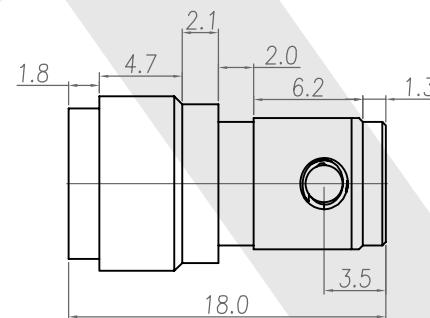


SHELL C



SCREW

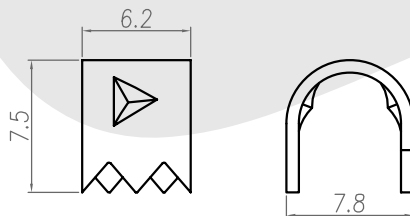

CRAMP

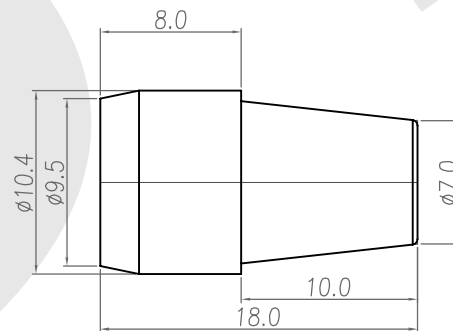

SR

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:			Part No.: ST3A-08WR-XXP-S		
	Title: P-P CONN. Wire Receptacle Solder Type (M)					
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By: du	1:1	2/2	A	QC5666		.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Approved By: Tony	Thire angle Projection				Units mm	
	General Dimesion Tolerance					