

## Panel Mount LCD


8.4"

### Specifications



|                                |   |
|--------------------------------|---|
| Model Name                     | R08L200-PPU1  |
| Panel Size                     | 8.4"  |
| Active Display Area(mm)        | 170.4(H)x127.8(V)   |
| Resolution                     | 800x600   |
| Brightness(cd/m2)              | 600(Typical)  |
| Contrast Ratio                 | 600:1 (Typical)   |
| Viewing Angles(CR>=10 L/R/U/D) | -75~75(H) ; -60~70(V)   |
| Display Colors                 | 262K  |
| Standard Input Signal          | 1 x VGA (D-sub 15)<br>1 x HDMI (Type-A)                               |
| Touch Screen                   | Projected Capacitive  |
| Touch Interface                | USB   |
| Audio / Speakers (Optional)*   | Audio line in (3.5mm) + Speaker x2                                    |
| OSD                            | 5 Keys: -, +, Power, Esc, Enter                                       |
| Power Input                    | 12V DC input (2.5ψ)<br>with external AC-DC Adapter (100V~240V)        |
| Power Consumption              | 15W typical, Normal operation   |
| Operating temperature          | 0~50°C  |
| Storage Temperature            | -10~60°C  |
| Accessories                    | Power AC-DC Adapter(100V~240V)<br>VGA cable (1.8m)<br>HDMI cable (2m) |

\*Outside dimension and I/O will be different from standard

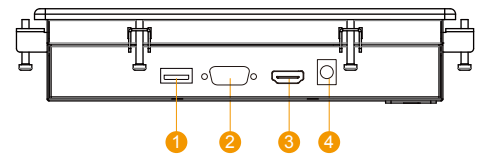

1. Touch
2. VGA
3. HDMI
4. DC input

| I/O Optional |   |
|--------------|---|
| Optional 1*  | 1 x VGA (D-sub 15)<br>1 x HDMI (Type-A)<br>1 x DVI-D            |
| Optional 2*  | 1 x VGA (D-sub 15)<br>1 x DVI-D<br>1 x S-Video<br>1 x Composite |

### Mechanical Drawing

